

ESPAÑOL

FRANÇAIS


ENGLISH



marantz[®] AV Surround Receiver **SR5005**

User Guide


SAFETY PRECAUTIONS



CAUTION

RISK OF ELECTRIC SHOCK

DO NOT OPEN



CAUTION:
TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING:
TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. Batteries shall not be exposed to excessive heat such as sunshine, fire or the like.



CAUTION:

To completely disconnect this product from the mains, disconnect the plug from the wall socket outlet.

The mains plug is used to completely interrupt the power supply to the unit and must be within easy access by the user.

PRECAUTION:

Pour déconnecter complètement ce produit du courant secteur, débranchez la prise de la prise murale.

La prise secteur est utilisée pour couper complètement l'alimentation de l'appareil et l'utilisateur doit pouvoir y accéder facilement.

PRECAUCIÓN:

Para desconectar completamente este producto de la alimentación eléctrica, desconecte el enchufe del enchufe de la pared.

El enchufe de la alimentación eléctrica se utiliza para interrumpir por completo el suministro de alimentación eléctrica a la unidad y debe de encontrarse en un lugar al que el usuario tenga fácil acceso.

FCC INFORMATION (For US customers)

1. PRODUCT

This product complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this product may not cause harmful interference, and (2) this product must accept any interference received, including interference that may cause undesired operation.

2. IMPORTANT NOTICE: DO NOT MODIFY THIS PRODUCT

This product, when installed as indicated in the instructions contained in this manual, meets FCC requirements. Modification not expressly approved by Marantz may void your authority, granted by the FCC, to use the product.

3. NOTE

This product has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This product generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this product does cause harmful interference to radio or television reception, which can be determined by turning the product OFF and ON, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the product into an outlet on a circuit different from that to which the receiver is connected.
- Consult the local retailer authorized to distribute this type of product or an experienced radio/TV technician for help.

For Canadian customers:


This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

NOTES ON USE / OBSERVATIONS RELATIVES A L'UTILISATION / NOTAS SOBRE EL USO

WARNINGS	AVERTISSEMENTS	ADVERTENCIAS
<ul style="list-style-type: none"> • Avoid high temperatures. Allow for sufficient heat dispersion when installed in a rack. • Handle the power cord carefully. Hold the plug when unplugging the cord. • Keep the unit free from moisture, water, and dust. • Unplug the power cord when not using the unit for long periods of time. • Do not obstruct the ventilation holes. • Do not let foreign objects into the unit. • Do not let insecticides, benzene, and thinner come in contact with the unit. • Never disassemble or modify the unit in any way. • Ventilation should not be impeded by covering the ventilation openings with items, such as newspapers, tablecloths or curtains. • Naked flame sources such as lighted candles should not be placed on the unit. • Observe and follow local regulations regarding battery disposal. • Do not expose the unit to dripping or splashing fluids. • Do not place objects filled with liquids, such as vases, on the unit. • Do not handle the mains cord with wet hands. • When the switch is in the OFF position, the equipment is not completely switched off from MAINS. • The equipment shall be installed near the power supply so that the power supply is easily accessible. 	<ul style="list-style-type: none"> • Éviter des températures élevées. Tenir compte d'une dispersion de chaleur suffisante lors de l'installation sur une étagère. • Manipuler le cordon d'alimentation avec précaution. Tenir la prise lors du débranchement du cordon. • Protéger l'appareil contre l'humidité, l'eau et la poussière. • Débrancher le cordon d'alimentation lorsque l'appareil n'est pas utilisé pendant de longues périodes. • Ne pas obstruer les trous d'aération. • Ne pas laisser des objets étrangers dans l'appareil. • Ne pas mettre en contact des insecticides, du benzène et un diluant avec l'appareil. • Ne jamais démonter ou modifier l'appareil d'une manière ou d'une autre. • Ne pas recouvrir les orifices de ventilation avec des objets tels que des journaux, nappes ou rideaux. Cela entraverait la ventilation. • Ne jamais placer de flamme nue sur l'appareil, notamment des bougies allumées. • Veillez à respecter les lois en vigueur lorsque vous jetez les piles usagées. • L'appareil ne doit pas être exposé à l'eau ou à l'humidité. • Ne pas poser d'objet contenant du liquide, par exemple un vase, sur l'appareil. • Ne pas manipuler le cordon d'alimentation avec les mains mouillées. • Lorsque l'interrupteur est sur la position OFF, l'appareil n'est pas complètement déconnecté du SECTEUR (MAINS). • L'appareil sera installé près de la source d'alimentation, de sorte que cette dernière soit facilement accessible. 	<ul style="list-style-type: none"> • Evite altas temperaturas. Permite la suficiente dispersión del calor cuando está instalado en la consola. • Maneje el cordón de energía con cuidado. Sostenga el enchufe cuando desconecte el cordón de energía. • Mantenga el equipo libre de humedad, agua y polvo. • Desconecte el cordón de energía cuando no utilice el equipo por mucho tiempo. • No obstruya los orificios de ventilación. • No deje objetos extraños dentro del equipo. • No permita el contacto de insecticidas, gasolina y diluyentes con el equipo. • Nunca desarme o modifique el equipo de ninguna manera. • La ventilación no debe quedar obstruida por haberse cubierto las aperturas con objetos como periódicos, manteles o cortinas. • No deberán colocarse sobre el aparato fuentes inflamables sin protección, como velas encendidas. • A la hora de deshacerse de las pilas, respete la normativa para el cuidado del medio ambiente. • No exponer el aparato al goteo o salpicaduras cuando se utilice. • No colocar sobre el aparato objetos llenos de líquido, como jarros. • No maneje el cable de alimentación con las manos mojadas. • Cuando el interruptor está en la posición OFF, el equipo no está completamente desconectado de la alimentación MAINS. • El equipo se instalará cerca de la fuente de alimentación de manera que resulte fácil acceder a ella.

CAUTIONS ON INSTALLATION PRÉCAUTIONS D'INSTALLATION EMPLAZAMIENTO DE LA INSTALACIÓN

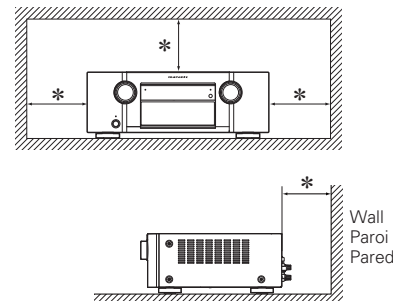

*** For proper heat dispersal, do not install this unit in a confined space, such as a bookcase or similar enclosure.**

- More than 0.3 m (12 in.) is recommended.
- Do not place any other equipment on this unit.

*** Pour permettre la dissipation de chaleur requise, n'installez pas cette unité dans un espace confiné tel qu'une bibliothèque ou un endroit similaire.**

- Une distance de plus de 0,3 m (12 po) est recommandée.
- Ne placez aucun matériel sur cet appareil.

*** Para la dispersión del calor adecuadamente, no instale este equipo en un lugar confinado tal como una librería o unidad similar.**

- Se recomienda dejar más de 0,3 m (12 pulg.) alrededor.
- No coloque ningún otro equipo sobre la unidad.

Getting started

Thank you for purchasing this Marantz product. To ensure proper operation, please read this user guide carefully before using the product.

After reading them, be sure to keep them for future reference.

Contents

Getting started	1
Accessories	1
About this manual	1
Features	2
Cautions on handling	2

Simple version (Simple setup guide)

Basic version

Connections	13
Important information	13
Connecting an HDMI-compatible device	14
Connecting a TV	16
Connecting a Blu-ray Disc player / DVD player	16
Connecting a set-top box (Satellite tuner/cable TV)	17
Connecting a video cassette recorder	17
Connecting a digital camcorder	18
Connecting a CD player	18
Connecting a wireless receiver (RX101)	18
Connecting an iPod or USB memory device to the USB Port	19
Connecting an antenna	20
Connect a device that has a multichannel output terminal	21
Connecting an external power amplifier	21
Playback (Basic operation)	22
Important information	22
Playing a Blu-ray Disc player/DVD player	23
Playing a CD player	23
Playing an iPod®	23
Playing a USB memory device	24
Tuning in radio stations	25
Selecting a listening mode (Surround mode)	29
Multi-channel playback	29
Stereo playback	31
Direct playback	31
Dolby Virtual Speaker/Dolby Headphone playback	31

Advanced version

Speaker installation/connection (Other than 7.1-channel system with surround back speakers)	33
Install	33
Connect	34
Set up speakers	37
Connections (Advanced connection)	38
REMOTE CONTROL jacks	38
RS-232C connector	38
DC OUT (TRIGGER OUT) jacks	38
Playback (Advanced operation)	39
Convenient functions	39
Playback in ZONE2 (Separate room)	41
① ZONE2 playback by speaker output	41
② ZONE2 playback by audio output	41
Playback	42
How to make detailed settings	43
Menu map	43
Examples of on-screen display and front display	44
Inputting characters	45
Input Setup	46
Audio Adjust	52
Manual Setup	56
Information	61
Other settings	62
Remote control settings	62
Switching the on-screen display output mode	62
Operating the connected devices by remote control unit	63
Operating AV equipment	63
Registering preset codes	63
Operating components	65
Operating learn mode	66
Setting the back light	67

Information

Part names and functions	69
Front panel	69
Display	69
Rear panel	70
Remote control unit	71
Other information	73
Trademark information	73
Surround	74
Explanation of terms	78
Troubleshooting	80
Resetting the microprocessor	82
Specifications	83


List of preset codes

End of this manual

Accessories

Check that the following parts are supplied with the product.

① User guide	1
② Warranty card (for USA)	1
③ Warranty card (for CANADA)	1
④ Power cord	1
⑤ Remote control unit (RC010SR)	1
⑥ R03/AAA batteries	2
⑦ Setup microphone (ACM1H)	1
⑧ AM loop antenna	1
⑨ FM indoor antenna	1

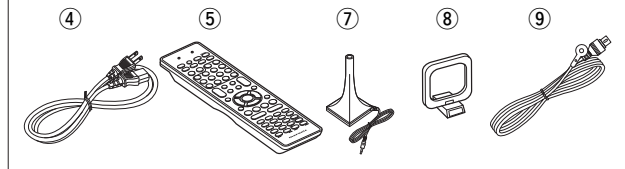

About this manual

❑ Operation buttons

The operations described in this manual are based mainly on remote control operation.

❑ Symbols



This symbol indicates a reference page on which related information is described.



This symbol indicates a supplementary information and tips for operations.

NOTE

This symbol indicates points to remember operations or function limitations.

❑ Illustrations

Note that the illustrations in these instructions are for explanation purposes and may differ from the actual unit.

Features

Fully Discrete, identical quality and power for all 7 channels (100 W x 7ch, 8Ω)

The unit is equipped with a power amplifier that plays back high-fidelity sound in surround mode with equal quality and power for all channels, true to the original sound.

The power amplifier circuit adopts a discrete-circuit configuration that achieves high-quality surround sound play back.

Supports HDMI 1.4a with 3D, ARC, Deep Color, x.v.Color, Auto Lipsync and HDMI control function

This unit can output 3D video signals input from a Blu-ray Disc player to a TV that supports a 3D system. This unit also supports the ARC (Audio Return Channel) function, which plays back TV sound with this unit via an HDMI cable used for connecting the unit and a TV*.

* The TV should support the ARC function.

4-HDMI inputs and 1-output

The unit is equipped with 4 HDMI input connectors for connecting devices with HDMI connectors, such as a Blu-ray Disc player, game machine, HD video camera, etc.

High Definition Audio Support

The unit is equipped with a decoder which supports high-quality digital audio format for Blu-ray Disc players such as Dolby TrueHD, DTS-HD Master Audio, etc.

Dolby Pro Logic IIz

The unit is provided with a Dolby Pro Logic IIz decoder. When you play back the sound in Dolby Pro Logic IIz playback with front height speakers connected to the unit, you can enjoy playback sound with rich spacial expression.

Easy to use, On-Screen Display

Simple settings are enabled with the setting menus displayed on the TV screen. When you control the sound volume, the volume level is displayed on the screen, and when you switch the input source, the name of the input source is displayed.

Auto setup function

The unit is provided with an "Auto setup function" which automatically makes speaker settings best suited for the listening environment. The sound from the speakers is picked up with the supplied microphone. Reflecting sound and audio characteristics of speakers are measured, and settings for an optimum sound field are automatically made.

All sources are up-scaled to 1080p

The unit is provided with an HDMI video upscaling function that converts an analog video signal input to the unit to a 1080p (HD resolution) signal and supplies it to a TV via the HDMI connector. This enables the unit and a TV connected with a single HDMI cable and any video source to be reproduced precisely with HD level of quality.

Direct Play for iPod® and iPhone® via USB

Music data from an iPod can be played back if you connect the USB cable supplied with the iPod via the USB port of this unit, and also an iPod can be controlled with the remote control unit for this unit.

M-XPort (Marantz-eXtension Port)

This unit is equipped with the M-Xport, a Marantz original innovation that provides outstanding expandability. You can connect the Wireless Receiver RX101 (sold separately) to this port.

Speaker terminal for front height channel

The unit is equipped with dedicated front height channel speaker terminals on the rear panel. You can enjoy 7.1-channel playback using the front height channel and 7.1-channel playback using the surround back channel, without having to reconnect the speakers.

Other features

- Dolby Virtual Speaker (🔗 page 31)
- Dolby Headphone (🔗 page 31)
- DTS Neural Surround (🔗 page 29)

Cautions on handling

• Before turning the power switch on

Check once again that all connections are correct and that there are no problems with the connection cables.

- Power is supplied to some of the circuitry even when the unit is set to the standby mode. When going on vacation or leaving home for long periods of time, be sure to unplug the power cord from the power outlet.

• About Condensation

If there is a major difference in temperature between the inside of the unit and the surroundings, condensation (dew) may form on the operating parts inside the unit, causing the unit not to operate properly.

If this happens, let the unit sit for an hour or two with the power turned off and wait until there is little difference in temperature before using the unit.

• Cautions on using mobile phones

Using a mobile phone near this unit may result in noise. If that occurs, move the mobile phone away from this unit when it is in use.

• Moving the unit

Turn off the power and unplug the power cord from the power outlet. Next, disconnect the connection cables to other system units before moving the unit.


• About Care

- Wipe the cabinet and control panel clean with a soft cloth.
- Follow the instructions when using a chemical cleaner.
- Benzene, paint thinner or other organic solvents as well as insecticide may cause material changes and discoloration if brought into contact with the unit, and should therefore not be used.

Simple version (Simple setup guide)

Here, we explain the entire setup procedure, from unboxing the unit to using it in a home theater. The "Simple version" section provides the speaker installation, connection, and setup methods for the 7.1-channel system with surround back speakers. For the installing, connecting, and setup methods of speakers other than the 7.1-channel system (with surround back speakers), see page 33.

- ❑ Before connecting the unit, turn off the power to all devices.
- ❑ For operation of the connected devices, refer to the user manuals for each device.

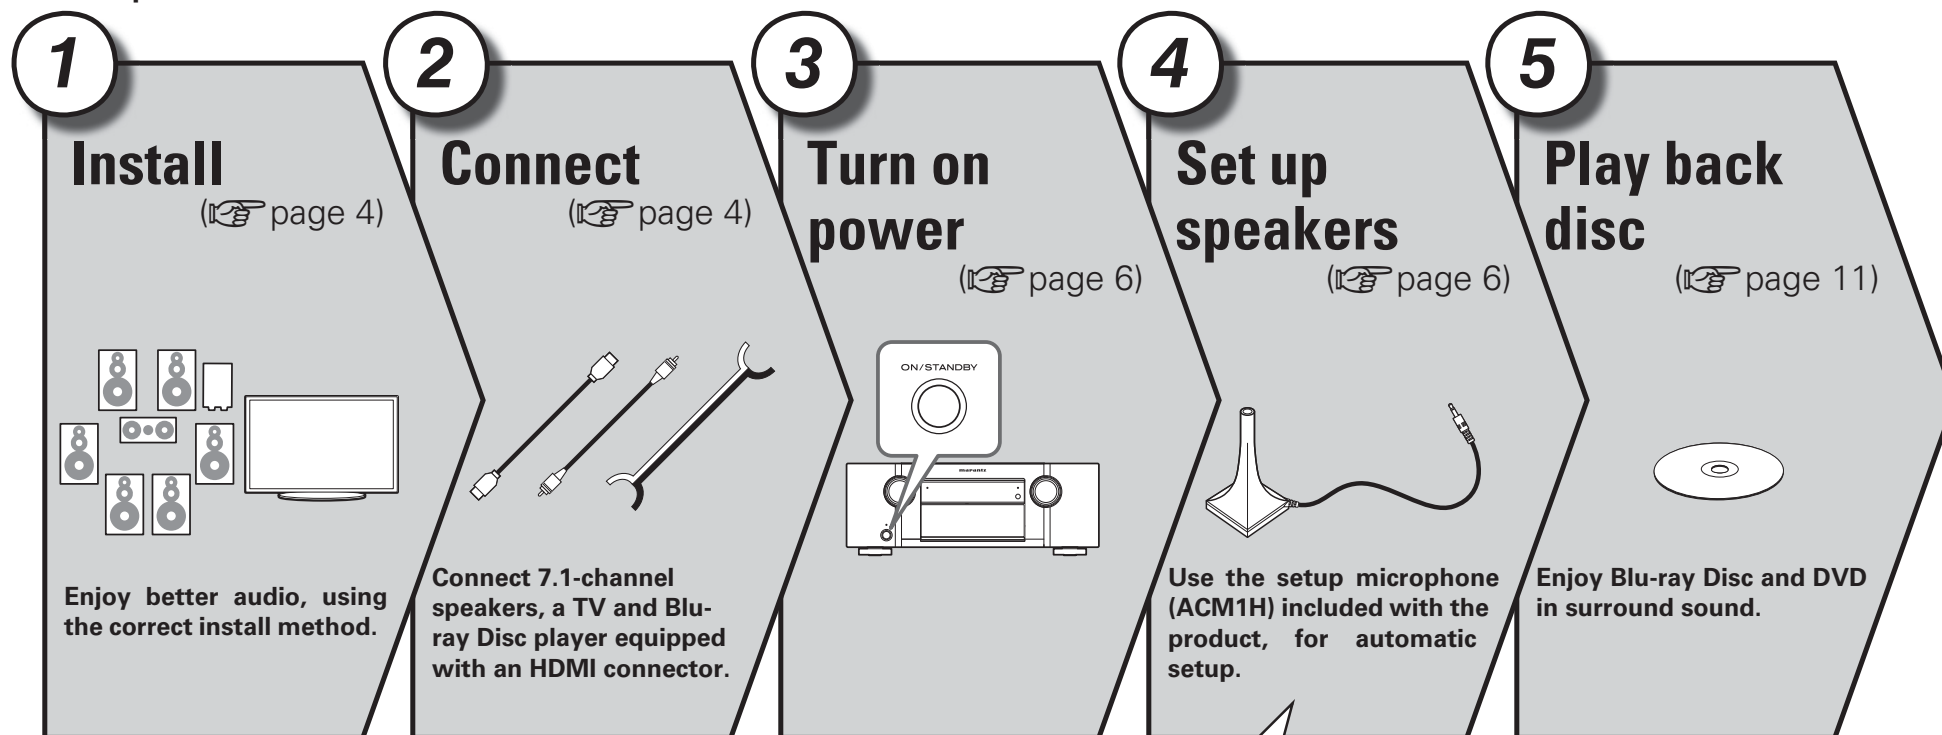

Set up speakers (Audyssey® Auto Setup)

Preparation

Step 1
Speaker
Detection

Step 2
Measurement

Step 3
Calculating

Step 4
Check

Step 5
Store


Finish

1 Install




This unit can perform 2.0/2.1 to 7.1-channel surround playback. This page provides the speaker installation procedure for the 7.1-channel playback using surround back speakers as an example.

The default setting is 7.1-channel. You can also perform 5.1-channel playback. To perform 5.1-channel playback, connect 5.1-channel speakers only. Use the Audyssey Auto Setup function of this unit to automatically detect the number of connected speakers and perform optimal settings for the speakers to be used.

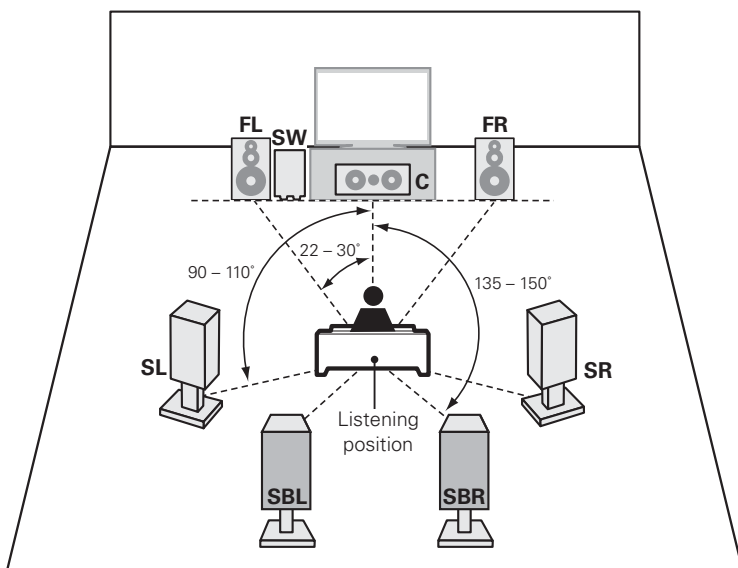

FL Front speaker (L)
FR Front speaker (R)
C Center speaker
SW Subwoofer
SL Surround speaker (L)
SR Surround speaker (R)
SBL Surround back speaker (L)
SBR Surround back speaker (R)

- Install the surround speakers in a position 2 to 3 ft (60 to 90 cm) higher than ear level.

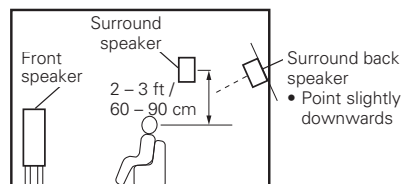

[Viewed from the side]

2 Connect




Speakers

Carefully check the left (L) and right (R) channels and + (red) and - (black) polarities on the speakers being connected to the this unit, and be sure to interconnect the channels and polarities correctly.

Connecting the speaker cables


Peel off about 0.03 ft/10 mm of sheathing from the tip of the speaker cable, then either twist the core wire tightly or terminate it.

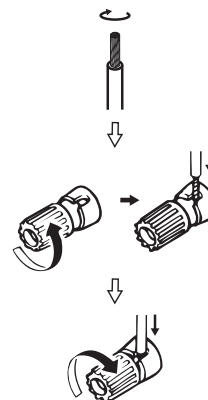

NOTE

- Connect so that the speaker cable core wires do not protrude from the speaker terminal. The protection circuit may be activated if the core wires touch the rear panel or if the + and - sides touch each other (see page 79 "Protection Circuit").
- Never touch the speaker terminals while the power supply is connected. Doing so could result in electric shock.
- Use speakers with the speaker impedances shown below.


Speaker terminals	Speaker impedance
FRONT A	6 - 8 Ω
CENTER	
SURROUND	
SURR. BACK/AMP ASSIGN	
FRONT B/HEIGHT	
FRONT A + FRONT B	8 Ω

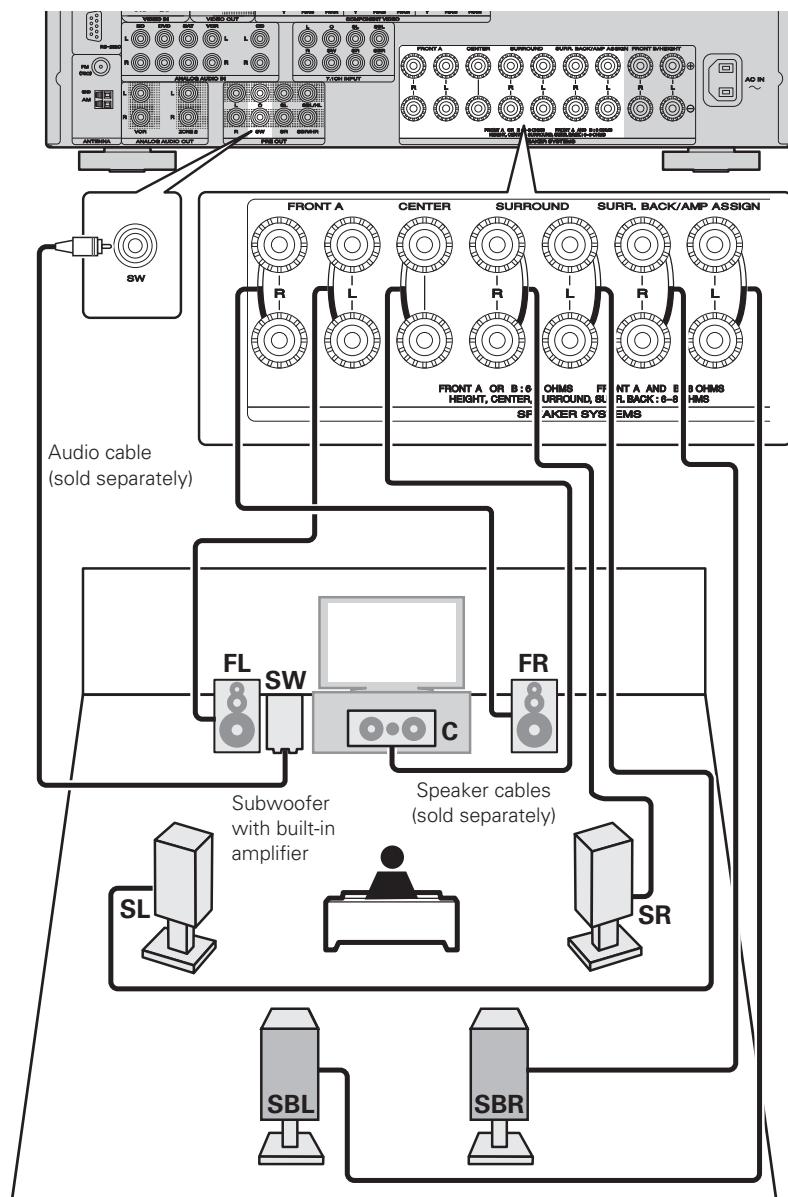

Blu-ray Disc player and TV

Use only an HDMI (High-Definition Multimedia Interface) cable that bears the HDMI logo (a certified HDMI product). Using a cable without the HDMI logo (an uncertified HDMI product) may result in abnormal playback.

When outputting Deep Color or 1080p, etc., we recommend you use a "High Speed HDMI cable" or a "High Speed HDMI cable with Ethernet" for enhanced high-quality playback.

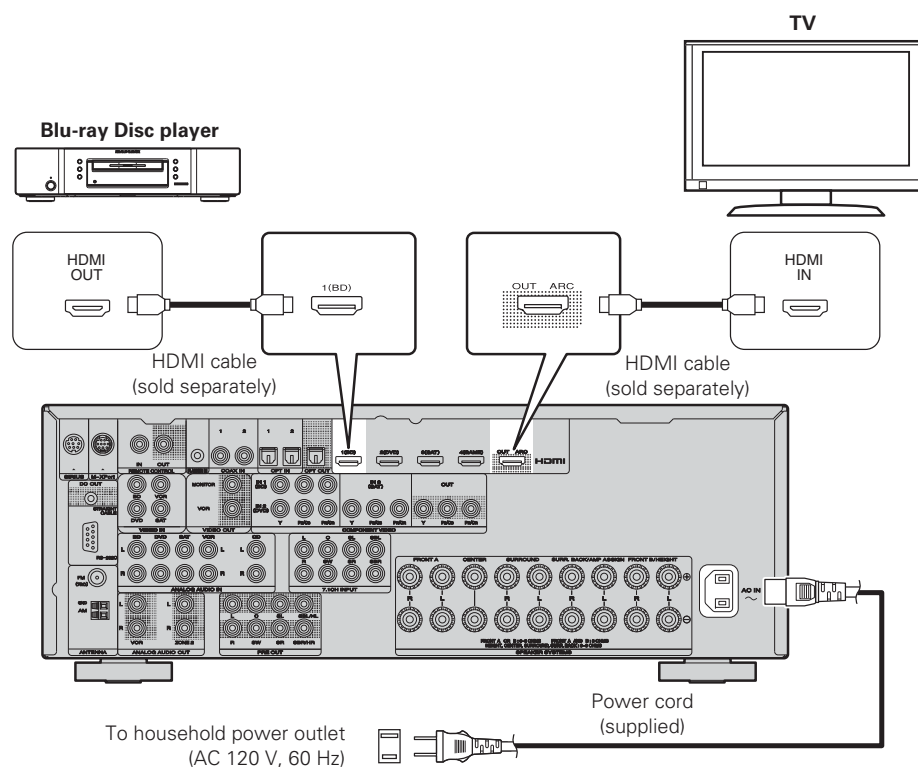

NOTE


- Do not plug in the power cord until all connections have been completed.
- Do not bundle power cords together with connection cables. Doing so can result in humming or noise.

The "Simple version" section provides the speaker installation, connection, and setup methods for the 7.1-channel system with surround back speakers. For the installing, connecting, and setup methods of speakers other than the 7.1-channel system (with surround back speakers), see page 33.

3 Turn on power




- 1** Turn on the TV and subwoofer power.

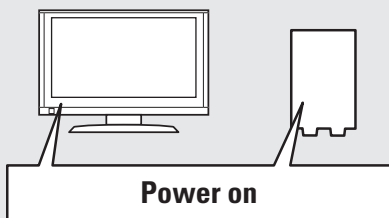

- 2** Change the TV input to the input of this unit.

- 3** Press **ON** to turn on power to the unit.
The power indicator switches off, and power is supplied to the unit.

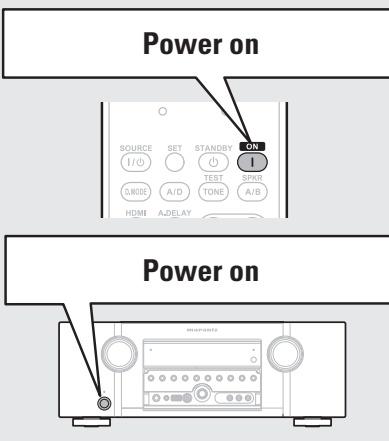

4 Set up speakers (Audyssey® Auto Setup)




The acoustic characteristics of the connected speakers and listening room are measured and the optimum settings are made automatically. This is called “Audyssey Auto Setup”.

To perform measurement, place the setup microphone in multiple locations all around the listening area. For best results, we recommend you measure in six positions, as shown in the illustration (up to six positions).

- When performing Audyssey Auto Setup, MultEQ®/Dynamic EQ®/Dynamic Volume® functions become active (page 53, 54).
- To set up the speakers manually, use “Speaker Setup” (page 56) on the menu.

NOTE


- Make the room as quiet as possible. Background noise can disrupt the room measurements. Close windows, silence cell phones, televisions, radios, air conditioners, fluorescent lights, home appliances, light dimmers, or other devices as measurements may be affected by these sounds.
- Cell phones should be placed away from all audio electronics during the measurement process as Radio Frequency Interference (RFI) may cause measurement disruptions (even if the cell phone is not in use).
- Do not unplug the setup microphone from the main unit until Audyssey Auto Setup is completed.
- Do not stand between the speakers and setup microphone or allow obstacles in the path while the measurements are being made. This will cause inaccurate readings.
- Loud test sounds may be played during Audyssey Auto setup. This is part of normal operation. If there is background noise in room, these test signals will increase in volume.
- Operating **VOLUME +** – during the measurements will cancel the measurements.
- Measurement cannot be performed when headphones are connected.



About setup microphone placement


- Measurements are performed by placing the setup microphone successively at multiple positions throughout the entire listening area, as shown in **[Example ①]**. For best results, we recommend you measure in six positions, as shown in the illustration (up to six positions).
- Even if the listening environment is small as shown in **[Example ②]**, measuring at multiple points throughout the listening environment results in more effective correction.

[Example ①]



FL Front speaker (L)
FR Front speaker (R)
C Center speaker
SW Subwoofer

[Example ②]



SL Surround speaker (L)
SR Surround speaker (R)
SBL Surround back speaker (L)
SBR Surround back speaker (R)


About the main listening position (*M)

The main listening position is the position where listeners would normally sit or where one would normally sit alone within the listening environment. Before starting Audyssey Auto Setup, place the setup microphone in the main listening position. Audyssey MultEQ® uses the measurements from this position to calculate speaker distance, level, polarity, and the optimum crossover value for the subwoofer.

1 Set up the microphone

Mount the setup microphone on a tripod or stand and place it in the main listening position.

When placing the setup microphone, adjust the height of the sound receptor to the level of the listener's ear.

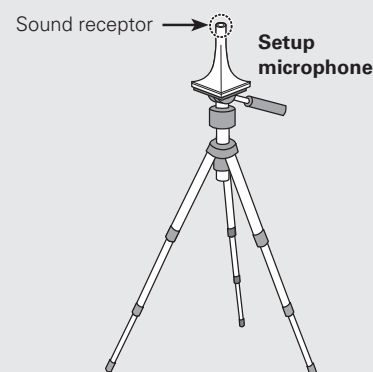

NOTE

- Do not hold the setup microphone in your hand during measurements.
- Avoid placing the setup microphone close to a seat back or wall as sound reflections may give inaccurate results.

2 Set up the subwoofer

If using a subwoofer capable of the following adjustments, set up the subwoofer as shown below.

- ☐ **When using a subwoofer with a direct mode**
Set the direct mode to "On" and disable the volume adjustment and crossover frequency setting.
- ☐ **When using a subwoofer without a direct mode**
Make the following settings:
 - Volume** : "12 o'clock position"
 - Crossover frequency** :
"Maximum/Highest Frequency"
 - Low pass filter** : "Off"
 - Standby mode** : "Off"

3 Set up the remote control unit

- ☐ **Set up the operation mode**
Press **AMP** to set the remote control unit to amplifier operation mode.




Press AMP

The "Simple version" section provides the speaker installation, connection, and setup methods for the 7.1-channel system with surround back speakers. For the installing, connecting, and setup methods of speakers other than the 7.1-channel system (with surround back speakers), see page 33.

Set up speakers (Audyssey® Auto Setup)

Preparation

4 Connect the setup microphone to the SETUP MIC jack of this unit.



When the setup microphone is connected, the following screen is displayed.

```

3-1. Audyssey Auto Setup
Please place microphone
at ear height at
main listening position.
F. Height : Measure
Front Sp. : A
Amp Assign: Normal
Start
Cancel
[ENT]:Select [RTN]:Back
  
```

The setting method for 7.1-channel playback using the surround back speakers is described here.

For the method of setting up speakers other than the 7.1-channel system, select "Amp Assign" and perform steps 3 and 4 of "Set up speakers" (page 37).

5 Use Δ / ∇ to select "Start" and then press ENTER.

When measuring begins, a test tone is output from each speaker.

- Measurement requires several minutes.

If "Cancel" is selected

"Cancel Auto Setup?" is displayed on the TV screen. If "Yes" is selected, "Audyssey Auto Setup" closes.

Step 1
Speaker Detection

- In step 1, you will perform measurements at the main listening position.
- This step automatically checks the speaker configuration and speaker size, and calculates the channel level, distance, and crossover frequency. It also corrects distortion in the listening area.

6 The detected speakers are displayed.

```

Step1:Speaker Detection
Front Sp. :Yes
F. Height Sp. :No
Center Sp. :Yes
Surround Sp. :Yes
S. Back Sp. :Yes 2ch
Subwoofer :Yes
Next
Retry
[ENT]:Next
  
```

NOTE

If a connected speaker is not displayed, the speaker may not be connected correctly. Check the speaker connection.

7 Use Δ / ∇ to select "Next" and then press ENTER.

NOTE

If "Caution" is displayed:

Go to "Error messages" (page 10), check any related items, and perform the necessary procedures.

If the problem is resolved, return and restart "Audyssey Auto Setup".

When performing Audyssey Auto Setup over again

Press Δ / ∇ to select "Retry", and then press ENTER.

When measuring has stopped

Press Δ / ∇ to select "Cancel", then press ENTER.

Press \triangleleft / \triangleright to select "Yes", then press ENTER.

Setting up the speakers again

Repeat the operation from step 4 of Preparation.

Step 2
Measurement

- In step 2, you will perform measurements at multiple positions (two to six positions) other than the main listening position.
- You can achieve a more effective correction of distortion within the listening area by performing measurements at multiple positions.

8 Move the setup microphone to position 2, use Δ / ∇ to select "Next", and then press ENTER.

The measurement of the second position starts. Measurements can be made in up to six positions.

```

Step2:Measurement
Please place microphone
at ear height at
2nd listening position.
Next
Calculate
Cancel
[ENT]:Next
  
```



If you want to omit measurements from the next position onward, select "Calculate".

(Go to Step 3 Calculating)

9 Repeat step 8, measuring positions 3 to 6.

When measurement of position 6 is completed, a "All the measurements were finished." message is displayed.

```


Step2:Measurement
All the measurements
were finished.
Calculate
Retry
Cancel
[ENT]:Calculate
  
```



Step 3 Calculating

10 On the **Step 2** screen, use Δ ∇ to select “Calculate”, and then press **ENTER**.


Measuring results are analyzed, and the frequency response of each speaker in the listening room is determined.



- Analysis takes several minutes to complete. The time required for this analysis depends on the number of speakers connected. The more connected speakers there are, the longer it takes to perform analysis.

Step 4 Check

11 Use Δ ∇ to select the item you want to check, and then press **ENTER**.



- Subwoofers may measure a greater reported distance than the actual distance due to added electrical delay common in subwoofers.
- If you want to check another item, press **RETURN**.

12 Use Δ ∇ to select “Next” and then press **ENTER**.



NOTE

- If the result differs from the actual connection status, or if “Caution!” is displayed, see “Error messages” (page 10). Then carry out Audyssey Auto Setup again.
- If the result still differs from the actual connection status after remeasurement or the error message still appears, it is possible that the speakers are not connected properly. Turn this unit off, check the speaker connections and repeat the measurement process from the beginning.
- If you change speaker positions or orientation, perform Audyssey Auto Setup again to find the optimal equalizer settings.

Step 5 Store

13 Use Δ ∇ to select “Store” and then press **ENTER**.

Save the measurement results.



- Saving the results requires about 10 seconds.
- If you do not want to save the measurement results, use Δ ∇ to select “Cancel”, then select “Yes” using \triangleleft \triangleright . All the measured Audyssey Auto Setup data will be erased.


NOTE

During saving of measurement results, be sure not to turn off the power.

Finish

14 Unplug the setup microphone from the unit’s SETUP MIC jack.

15 Set Dynamic Volume®.



- For details of Dynamic Volume settings, see page 54.

☐ When turning Dynamic Volume on

- Use \triangleleft to select “Yes”, and then press **ENTER**. The unit automatically enters “Evening” mode.

☐ When turning Dynamic Volume off

- Use \triangleright to select “No”, and then press **ENTER**.

NOTE

After performing Audyssey Auto Setup, do not change the speaker connections or subwoofer volume. In event of a change, perform Audyssey Auto Setup again.



Error messages

An error message is displayed if Audyssey® Auto Setup could not be completed due to speaker placement, the measurement environment, etc. If this happens, check the relevant items, be sure to take the necessary measures, then perform Audyssey Auto Setup over again.

NOTE

Be sure to turn off the power before checking speaker connections.


Examples	Error details	Measures
<div>Caution MultEQ</div> <div>●Microphone:None or Speaker:None</div> <div>Retry Cancel</div> <div>[ENT]:Retry</div>	<ul style="list-style-type: none"> The connected setup microphone is broken, or a device other than the supplied setup microphone is connected. Not all speakers could be detected. The front L speaker was not properly detected. 	<ul style="list-style-type: none"> Connect the included setup microphone to the SETUP MIC jack of this unit. Check the speaker connections.
<div>Caution MultEQ</div> <div>●Ambient noise is too high or Level is too low.</div> <div>Retry Cancel</div> <div>[ENT]:Retry</div>	<ul style="list-style-type: none"> There is too much noise in the room for accurate measurements to be made. Speaker or subwoofer sound is too low for accurate measurements to be made. 	<ul style="list-style-type: none"> Either turn off any device generating noise or move it away. Perform again when the surroundings are quieter. Check the speaker installation and the direction in which the speakers are facing. Adjust the subwoofer's volume.
<div>Caution MultEQ</div> <div>◀Front R:None▶</div> <div>Retry Cancel Skip</div> <div>[▲▼]:Up/Down [◀▶]:CH</div>	<ul style="list-style-type: none"> The displayed speaker could not be detected. 	<ul style="list-style-type: none"> Check the connections of the displayed speaker.
<div>Caution MultEQ</div> <div>◀Front L:Phase▶</div> <div>Retry Cancel Skip</div> <div>[▲▼]:Up/Down [◀▶]:CH</div>	<ul style="list-style-type: none"> The displayed is connected with the polarities reversed. 	<ul style="list-style-type: none"> Check the polarities of the displayed speaker. For some speakers, this error message may be displayed even if the speaker is properly connected. If you are sure the connection is correct, press $\Delta \nabla$ to select "Skip", then press ENTER.

Parameter Check

This function enables you to check the measurement results and equalizer characteristics after Audyssey Auto Setup.

1 Use $\Delta \nabla$ to select "Parameter Check" and then press **ENTER**.

2 Use $\Delta \nabla$ to select the item you want to check, then press **ENTER**.



Speaker Config. Check Check the speaker configuration.

Distance Check Check the distance.

Channel Level Check Check the channel level.

Crossover Freq. Check Check the crossover frequency.

EQ Check Check the equalizer.

- If "EQ Check" is selected, press $\Delta \nabla$ to select equalizing curve ("Audyssey" or "Audyssey Flat") to be checked. Use $\triangleleft \triangleright$ to switch the display between the different speakers.

3 Press **RETURN**.

The confirmation screen reappears. Repeat step 2.

Retrieving Audyssey Auto Setup settings

If you set "Restore" to "Yes", you can return to Audyssey Auto Setup measurement result (value calculated at the start by MultEQ®) even when you have changed each setting manually.



5 Play back disc



1 Press **BD** two times in a row to switch an input source for a player used for playback.

2 Play the component connected to this unit.

Make the necessary settings on the player (language setting, subtitles setting, etc.) beforehand.

3 Adjust the sound volume.

VOLUME + Volume up
VOLUME - Volume down
MUTE Muting

4 Set the listening mode.

Set the listening mode according to the playback contents (cinema, music, etc.) or according to your liking (see page 29 "Selecting a listening mode (Surround mode)").



When power is switched to standby

Press **STANDBY**.

[Power indicator status in standby mode]

- Normal standby : Red
- When "HDMI Control" is set to "ON" : Orange



You can also switch the power to standby by pressing **ON/STANDBY** on the main unit.



NOTE

During power standby, a minimal amount of power is consumed. To totally cut off the power, remove the power cord from the power outlet.

Remote control operation buttons



Move the cursor
(Up/Down/Left/Right)



Confirm the setting

RETURN






Return to previous menu





















Basic version

Basic version

Here, we explain the connections and basic operation methods for this unit.

- **Connections**  **page 13**
- **Playback (Basic operation)**  **page 22**
- **Selecting a listening mode (Surround mode)**  **page 29**

☐ **Refer to the pages indicated below for information on connecting and playing back the various media and external devices.**

Audio and video	Connection	Playback
TV	 page 15, 16	–
Blu-ray Disc player	 page 15, 16	 page 23
DVD player	 page 15, 16	 page 23
Set-top box (Satellite tuner or cable TV)	 page 15, 17	–
Game console	 page 15	–
Video cassette recorder	 page 17	–
Digital camcorder	 page 18	–
Audio	Connection	Playback
iPod®	 page 19	 page 23
USB memory device	 page 19	 page 24
CD player	 page 18	 page 23
SIRIUS satellite radio	 page 20	 page 25
FM/AM radio	 page 20	 page 27
Wireless receiver (RX101)	 page 18	–

For speaker connections, see page 4.

Connections

Important information

- Make connections as follows before using this unit. Select an appropriate connection type according to the components to be connected.
- You may need to make some settings on this unit depending on the connection method. Refer to each description for more information.
- Select the cables (sold separately) according to the components being connected.


NOTE

- Do not plug in the power cord until all connections have been completed.
- When making connections, also refer to the operating instructions of the other components being connected.
- Be sure to connect the left and right channels properly (left with left, right with right).
- Do not bundle power cords together with connection cables. Doing so can result in noise.

Converting input video signals for output (Video conversion function)

This unit is equipped with three types of video input connector (HDMI, Component video and video) and three types of video output connector (HDMI, Component video and video). Use the connectors corresponding to the components to be connected. This function automatically converts various formats of video signals input to this unit into the formats used to output the video signals from this unit to a monitor.

[Flow of video signals]

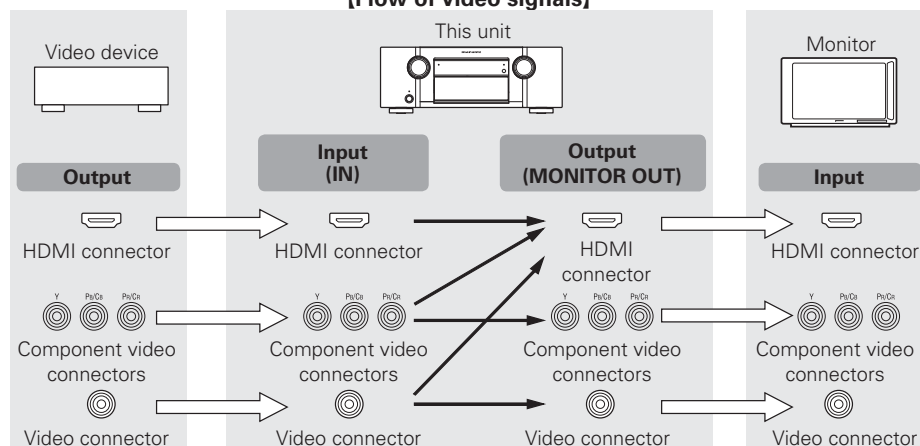

- The video conversion function supports the NTSC, PAL, SECAM, NTSC 4.43, PAL-N, PAL-M and PAL-60 formats.
- Resolutions of HDMI-compatible TVs can be checked at "HDMI Monitor Information" (page 61).

NOTE

- HDMI signals cannot be converted into analog signals.
- When a non-standard video signal from a game machine or some other source is input, the video conversion function might not operate.
- Component video input signals cannot be converted into Video format.

How the on-screen display appears in accordance with the video input signal

The way the on-screen display of the menus, status, etc., is displayed differs according to the type of video signal input to this unit.

❑ When video signals are input from the HDMI or component video connector

- **Menu:** Switches to a screen with a black background and the menu is superimposed*.
- **Status display:** Not displayed.

* If you want to display the menus superimposed on the background image, input the same video signals to the video connectors. When a menu is displayed, the picture switches to the one being input from the video connectors and the menu is displayed superimposed over this picture.

NOTE

The menus and status display screen will not be superimposed on the video output from the component video connector.

❑ When video signals are input from the video connector

- **Menu:** Menus are displayed superimposed over the background image.
- **Status display:** Displayed.

NOTE

When you use the component video output connector, the on-screen display is not displayed. If you want to display the on-screen display, connect a TV to the HDMI connector or video output connector.

Examples of on-screen display

- Menu screen

```
MENU
1. Audio Adjust
2. Information
3. Auto Setup
4. Manual Setup
5. Input Setup
```

[ENT] : Select

- Status display screen
When the input source is switched

```
[Auto]
IN : DVD
MODE : STEREO
```

Status display: The operating status appears briefly on the screen when the input source is switched or the volume is changed.

- When the volume is adjusted

```
Master Volume -80.0dB
```

NOTE

When you connect a TV to this unit using the video connector, the on-screen display may not be displayed on a TV in some cases. If the on-screen display is not displayed on your TV, set the on-screen display output mode to "Video" mode in accordance with "Switching the on-screen display output mode" (page 62).

Connecting an HDMI-compatible device

You can connect up to four HDMI-compatible devices to the unit.

HDMI function

This unit supports the following HDMI functions:

- 3D
- Deep Color (page 78)
- Auto Lip Sync (page 58)
- x.v.Color, sYCC601 color, Adobe RGB color, Adobe YCC601 color (page 78, 79)
- High definition digital audio format
- ARC (Audio Return Channel)
- Content Type
- CEC (HDMI control)

Copyright protection system

In order to play back digital video and audio such as BD-Video or DVD-Video via HDMI connection, both this unit and TV or the player need to support the copyright protection system known as HDCP (High-bandwidth Digital Content Protection System). HDCP is copyright protection technology comprised of data encryption and authentication of the connected AV device. This unit supports HDCP.

- If a device that does not support HDCP is connected, video and audio are not output correctly. Read the owner's manual of your television or player for more information.

About HDMI cables

- When a device supporting Deep Color signal transfer is connected, use a cable compatible "High Speed HDMI cable" or "High Speed HDMI cable with Ethernet"
- When the ARC function is used, connect a device with a "Standard HDMI cable with Ethernet" or "High Speed HDMI cable with Ethernet" for HDMI 1.4a.

HDMI control function (page 39)

This function allows you to operate external devices from the receiver and operate the receiver from external devices.

NOTE

- The HDMI control function may not work depending on the device it is connected to and its settings.
- You cannot operate a TV or Blu-ray Disc player / DVD player that is not compatible with the HDMI control function.

About 3D function

This unit supports input and output of 3D (3 dimensional) video signals of the HDMI 1.4a standards. For playing the 3D video content, a player, and a TV that support the 3D function of the HDMI 1.4a standards are required in addition to this unit.

About ARC (Audio return channel) function

The Audio Return Channel in HDMI 1.4a enables a TV, via a single HDMI cable, to send audio data “upstream” to this unit.

NOTE

- To enable the ARC function, set “HDMI Control” to “ON” (page 58).
- When connecting a TV that does not support the ARC function, a separate connection using an audio cable is required. In this case, refer to “Connecting a TV” (page 16) for the connection method.


About Content Type

The HDMI Specification Version 1.4a enables simple, automated picture setting selection with no user intervention.


NOTE

To enable the Content type, set “Video Mode” to “Auto” (page 49).

Cables used for connections

Audio and video cable (sold separately)	
HDMI cable	

- This interface allows transfer of digital video signals and digital audio signals over a single HDMI cable.

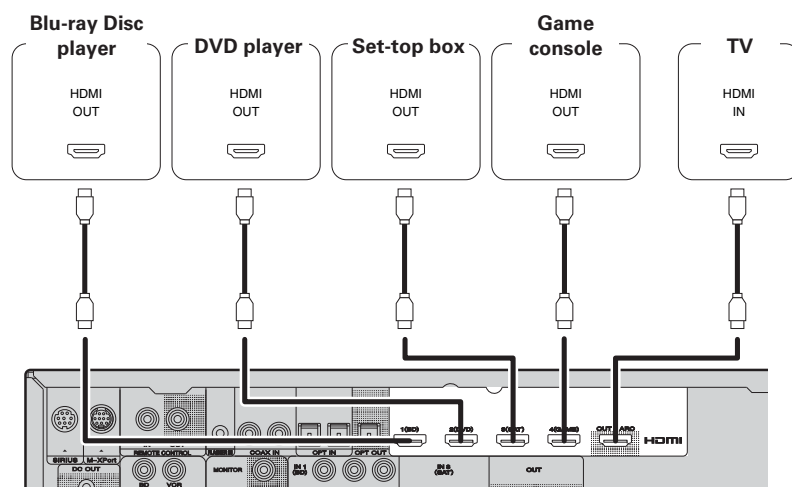

- When this unit is connected to other devices with HDMI cables, connect this unit and TV also with an HDMI cable.
- When connecting a device that supports Deep Color transmission, please use a “High Speed HDMI cable” or “High Speed HDMI cable with Ethernet”.
- Video signals are not output if the input video signals do not match the monitor’s resolution. In this case, switch the Blu-ray Disc/DVD player’s resolution to a resolution with which the monitor is compatible.
- When this unit and monitor are connected with an HDMI cable, if the monitor is not compatible with HDMI audio signal playback, only the video signals are output to the monitor.

NOTE

The audio signal from the HDMI output connector (sampling frequency, number of channels, etc.) may be limited by the HDMI audio specifications of the connected device regarding permissible inputs.

Connecting to a device equipped with a DVI-D connector

When an HDMI/DVI conversion cable (sold separately) is used, the HDMI video signals are converted to DVI signals, allowing connection to a device equipped with a DVI-D connector.

NOTE

- No sound is output when connected to a device equipped with a DVI-D connector. Make separate audio connections.
- Signals cannot be output to DVI-D devices that do not support HDCP.
- Depending on the combination of devices, the video signals may not be output.

Settings related to HDMI connections

Set as necessary. For details, see the respective reference pages.

Input Assign (page 48)

Set this to change the HDMI input connector to which the input source is assigned.

HDMI Setup (page 58)

Make settings for HDMI video/audio output.

- Auto Lip Sync
- HDMI Audio Out
- HDMI Control
- Standby Source
- Power Off Control

NOTE

The audio signals output from the HDMI connectors are only the HDMI input signals.

Connecting a TV

- Select the connector to use and connect the device.
- For video connections, see “Converting input video signals for output (Video conversion function)” (page 13).
- For instructions on HDMI connections, see “Connecting an HDMI-compatible device” (page 14).





To listen to TV audio through this device, use the optical digital connection.

NOTE

This connection is not required when a TV compatible with the ARC function (Audio Return Channel (HDMI 1.4a standard function)) is connected to this unit via an HDMI connection.

For details, see “About ARC (Audio return channel) function” (page 15) or refer to the instruction manual for your TV.

Cables used for connections

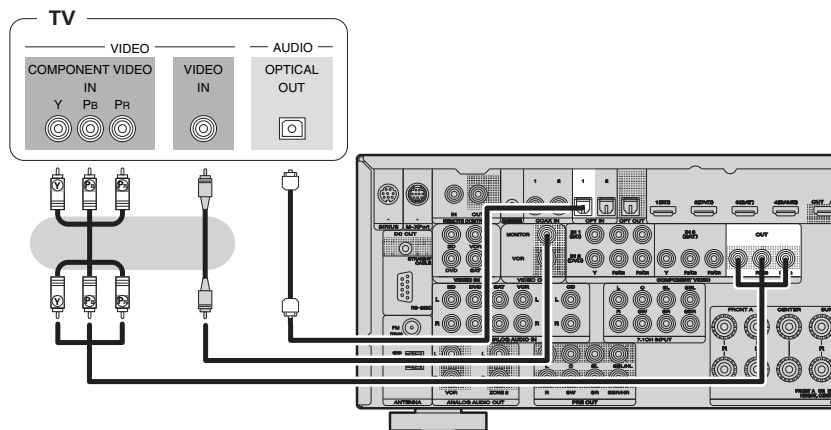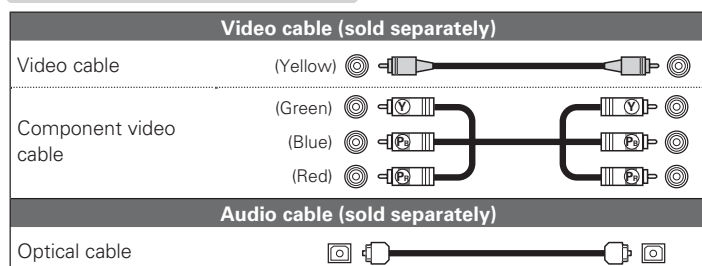

in Set as Necessary



Set this to change the digital input connector or component video input connector to which the input source is assigned.

“Input Assign” (page 48)

Connecting a Blu-ray Disc player / DVD player

- You can enjoy video and audio from a Blu-ray Disc or DVD.
- Select the connector to use and connect the device.
- For instructions on HDMI connections, see “Connecting an HDMI-compatible device” (page 14).

Cables used for connections

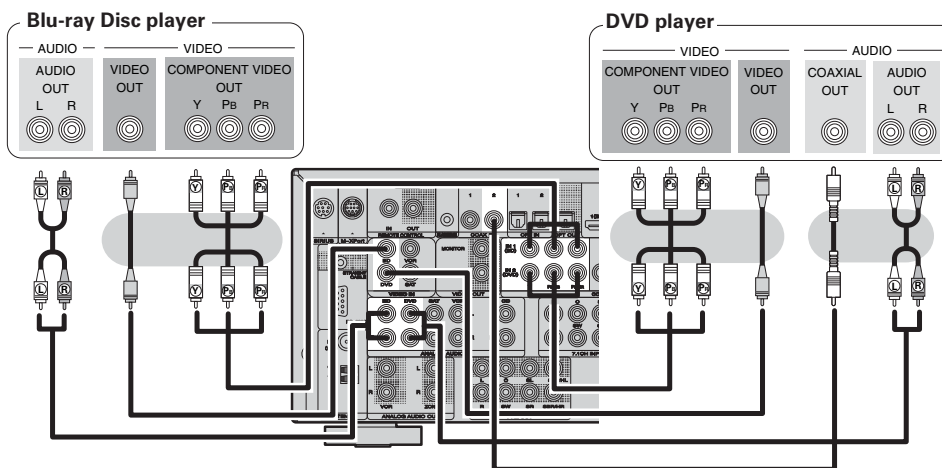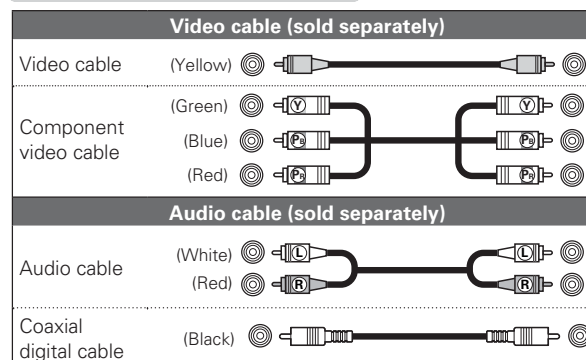

in Set as Necessary

Set this to change the digital input connector or component video input connector to which the input source is assigned.

“Input Assign” (page 48)




For HD audio (Dolby TrueHD, DTS-HD, Dolby Digital Plus and DTS Express) playback, connect with HDMI (page 14 “Connecting an HDMI-compatible device”).

Connecting a set-top box (Satellite tuner/cable TV)

- You can watch satellite or cable TV.
- Select the connector to use and connect the device.
- For instructions on HDMI connections, see "Connecting an HDMI-compatible device" (page 14).

Cables used for connections

Video cable (sold separately)	
Video cable	(Yellow)
Component video cable	(Green)
	(Blue)
	(Red)
Audio cables (sold separately)	
Audio cable	(White)
	(Red)
Coaxial digital cable	(Black)

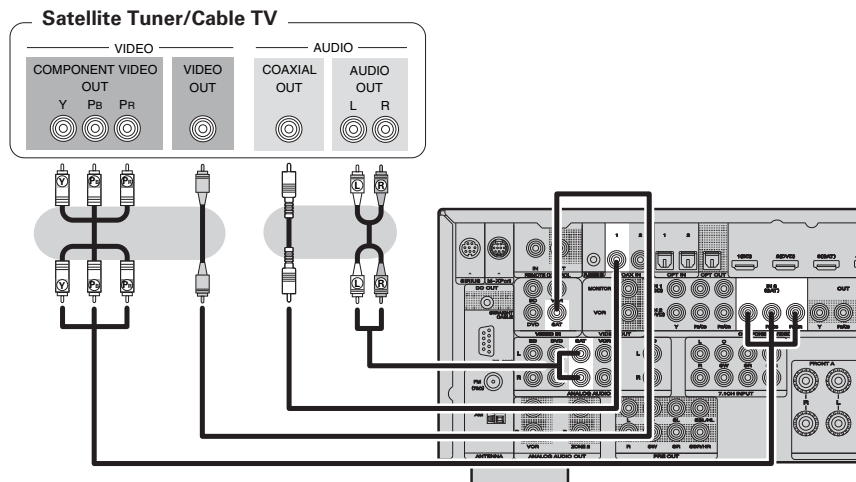

in Set as Necessary


Set this to change the digital input connector or component video input connector to which the input source is assigned.
"Input Assign" (page 48)

Connecting a video cassette recorder

- You can record video onto a video cassette tape.
- Select the connector to use and connect the device.

Cables used for connections

Video cable (sold separately)	
Video cable	(Yellow)
Audio cable (sold separately)	
Audio cable	(White)
	(Red)

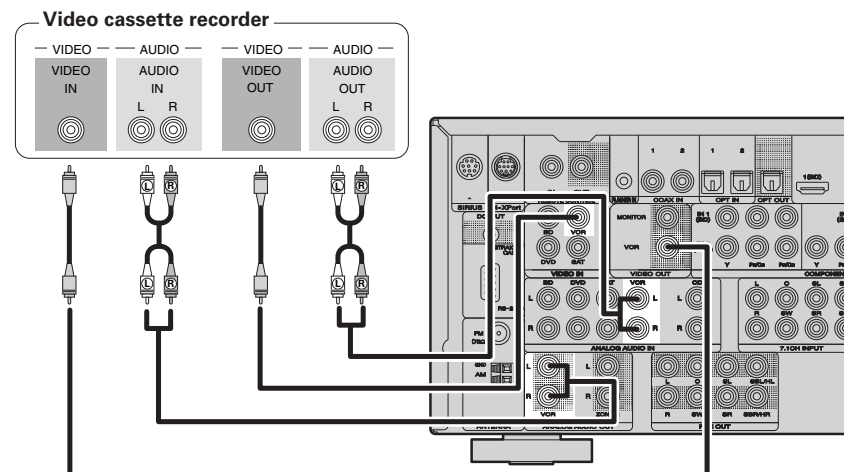

in Set as Necessary

Set this to change the digital input connector or component video input connector to which the input source is assigned.

"Input Assign" (page 48)



NOTE

To record video signals through this unit, use the same type of video cable for connection between this unit and the player as used for connection between this unit and the recorder.

Connecting a digital camcorder

- You can enjoy video and audio from a digital camcorder.
- You can enjoy games by connecting a game machine via the AUX1 input connector. In this case, select the input source to "AUX1".
- For instructions on HDMI connections, see "Connecting an HDMI-compatible device" (page 14).

Cables used for connections

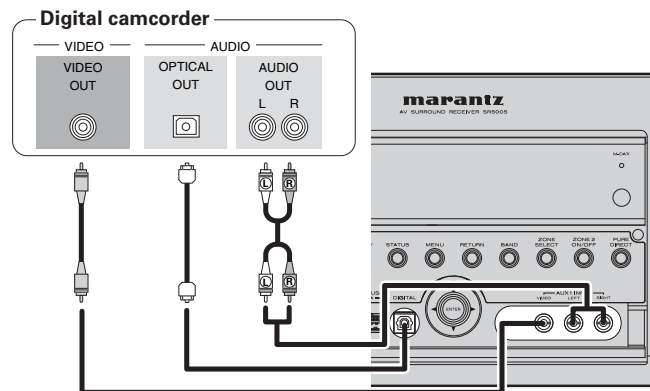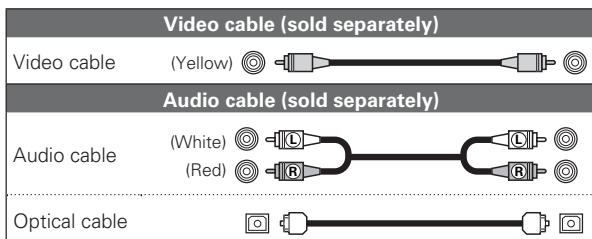



NOTE

When a non-standard video signal from a game machine or some other source is input, the video conversion function might not operate. In this case, use the monitor output of the same connector as the input.

Connecting a CD player

- You can enjoy CD sound.
- Select the connector to use and connect the device.

Cables used for connections

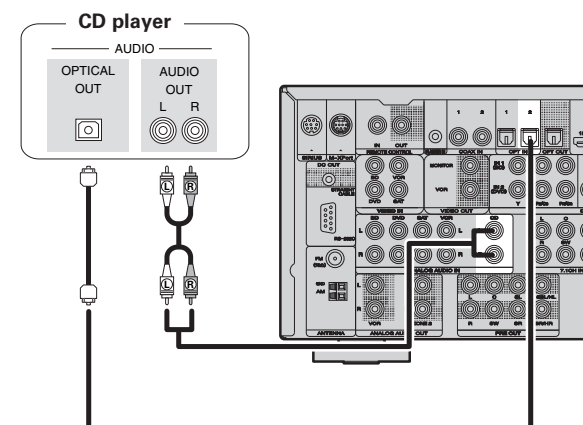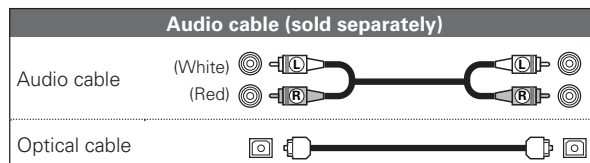


in Set as Necessary

Set this to change the digital input connector to which the input source is assigned.
"Input Assign" (page 48)

Connecting a wireless receiver (RX101)

By connecting a wireless receiver RX101 (sold separately) to this unit, you can receive and playback audio signals from other devices using the Bluetooth Communication Function.

- Use a Bluetooth device that is A2DP compatible (page 78 "A2DP").
- You can also use wireless receiver RX101 as an external IR receiver.
- For instructions on the wireless receiver settings, refer to the RX101's operating instructions.

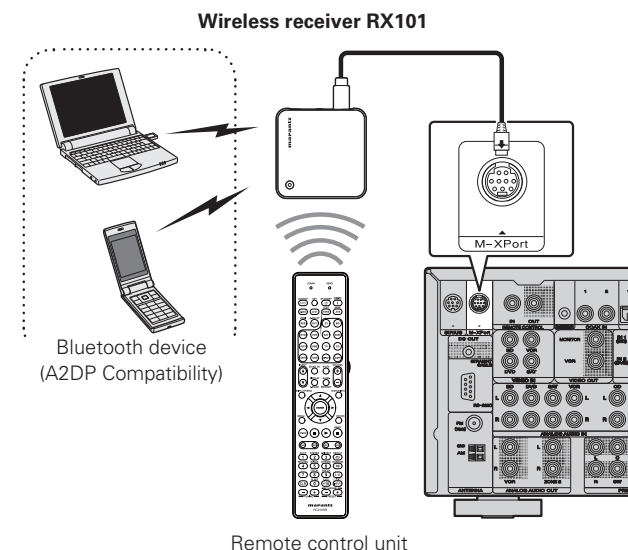

You can enjoy listening to music by connecting a wireless receiver via the M-XPORt input connector. In this case, set the input source to "M-XPORt".

NOTE


To use wireless receiver RX101 as external IR receiver, set the remote sensor function of this unit to "DISABLE" (page 62 "Remote control settings").

Connecting an iPod or USB memory device to the USB Port

You can enjoy music, stored on an iPod or USB memory device.

Cables used for connections

To connect an iPod to this unit, use the USB cable supplied with the iPod.

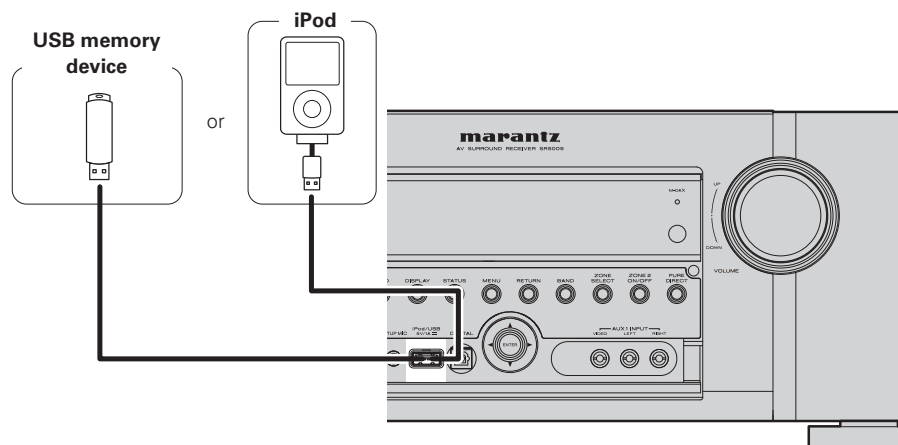

Marantz does not guarantee that all USB memory devices will operate or receive power. When using a portable USB connection type HDD of the kind to which an AC adapter can be connected to supply power, use the AC adapter.

NOTE


- USB memory devices will not work via a USB hub.
- Do not use an extension cable when connecting a USB memory device. This may cause radio interference with other devices.

Supported iPod Models

Made for

- iPod touch (2nd generation)
- iPod touch (1st generation)
- iPod classic
- iPod with video
- iPod nano (5th generation)
- iPod nano (4th generation)
- iPod nano (3rd generation)
- iPod nano (2nd generation)
- iPod nano (1st generation)

- iPhone
- iPhone 3G
- iPhone 3GS

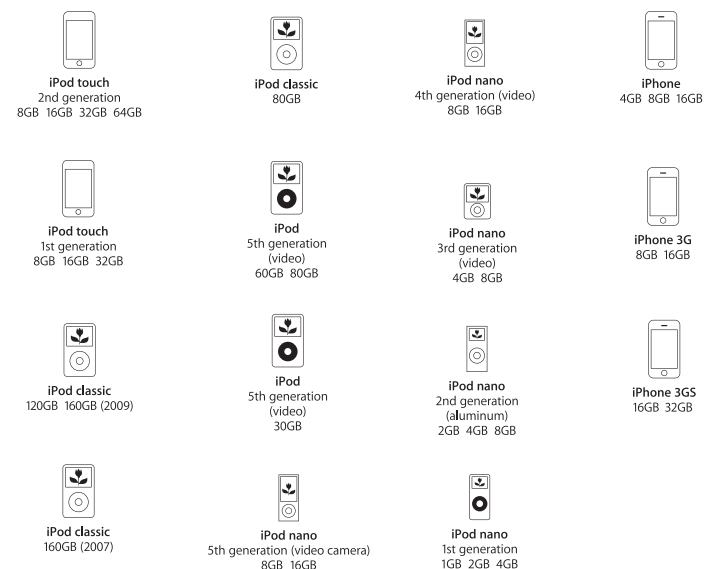


Connecting an antenna

Connecting an FM/AM antenna

- Connect the FM antenna or AM loop antenna supplied with the unit to enjoy listening to radio broadcasts.
- After connecting the antenna and receiving a broadcast signal (☞ page 27 "Listening to FM/AM broadcasts"), fix the antenna with tape in a position where the noise level becomes minimal.

Direction of broadcasting station

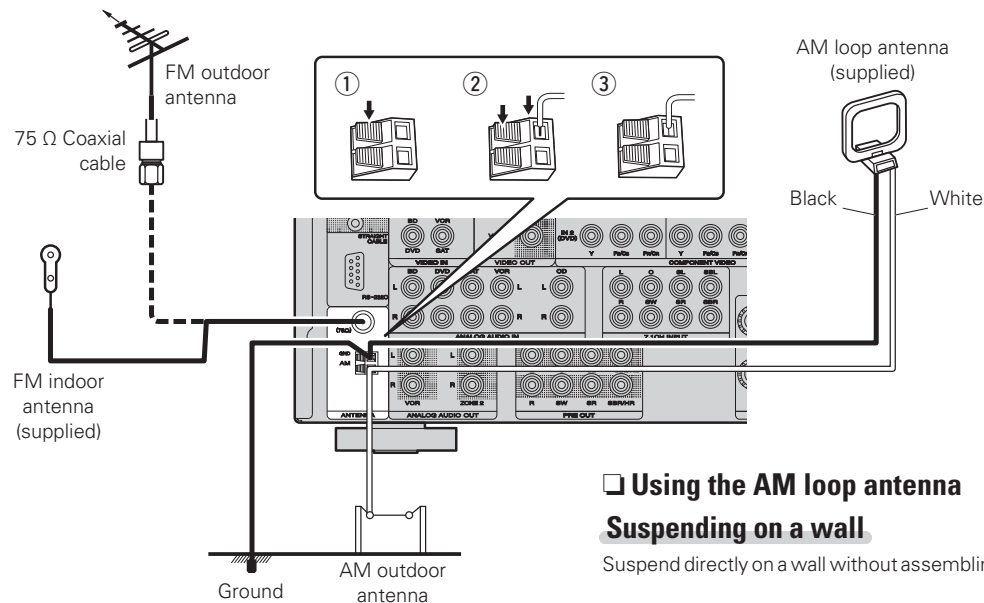

Using the AM loop antenna


Suspending on a wall

Suspend directly on a wall without assembling.



AM loop antenna assembly

- 1 Put the stand section through the bottom of the loop antenna from the rear and bend it forward.
- 2 Insert the projecting part into the square hole in the stand.

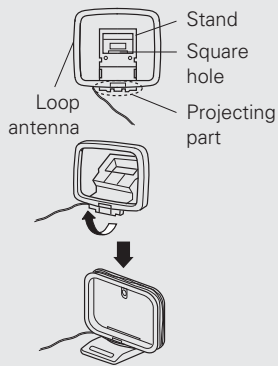

Standing alone


Use the procedure shown left to assemble.

NOTE

- Do not connect two FM antennas simultaneously.
- Even if an external AM antenna is used, do not disconnect the AM loop antenna.
- Make sure the AM loop antenna lead terminals do not touch metal parts of the panel.
- If the signal has noise interference, connect the ground terminal (GND) to reduce noise.
- If you are unable to receive a good broadcast signal, we recommend installing an outdoor antenna. For details, inquire at the retail store where you purchased the unit.

Connecting a SIRIUS connector

- This unit is a SIRIUS Satellite Radio Ready® receiver. You can receive SIRIUS® Satellite Radio by connecting to the SiriusConnect Home Tuner and subscribing to the SIRIUS service.
 - Plug the SIRIUS connector on the SIRIUS service.
 - Position the Home Tuner antenna near a south-facing window to receive the best signal.
- For details, see "Listening to SIRIUS satellite radio" (☞ page 25). When making connections, also refer to the operating instructions of the SiriusConnect Home Tuner.

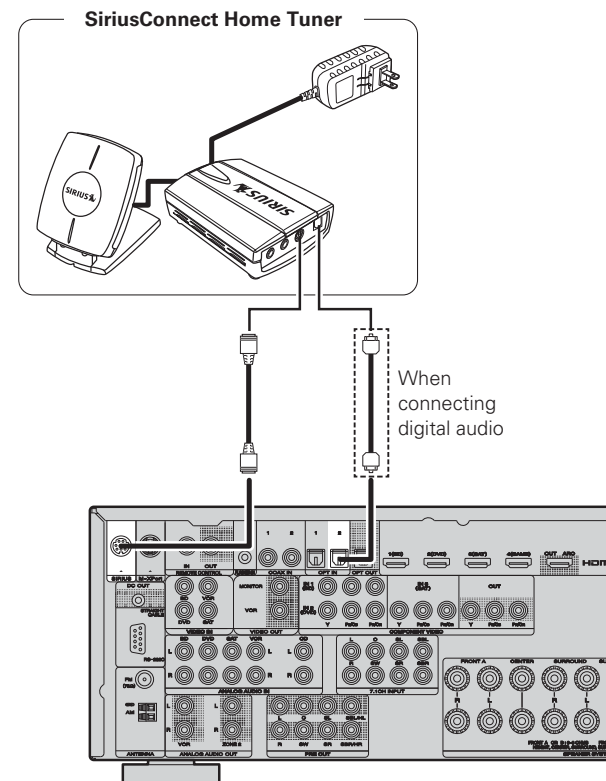

in Set as Necessary

When connecting digital of the SiriusConnect Home Tuner, perform the setting "Digital".
"Input Assign" (☞ page 48)


Connecting an antenna

NOTE

Keep the power cord unplugged until the SiriusConnect Home Tuner connection have been completed.

Positioning the antenna

For a consistent satellite signal, the antenna must be positioned correctly. Use the following map to determine which area you are in and position the antenna accordingly.


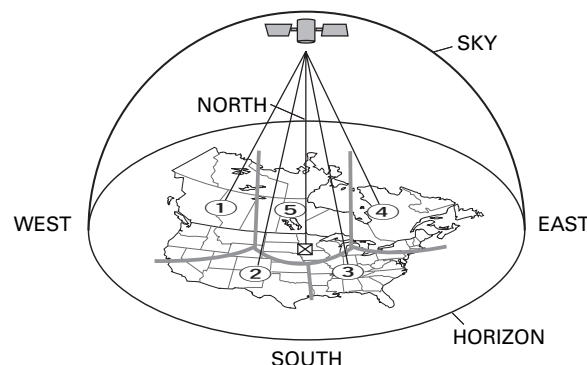


- Area 1** Point the antenna toward the sky in the **east, northeast, or southeast**, either through a window or outside.
- Area 2** Point the antenna toward the sky in the **north or northeast**, either through a window or outside.
- Area 3** Point the antenna toward the sky in the **north or northwest**, either through a window or outside.
- Area 4** Point the antenna toward the sky in the **west, northwest, or southwest**, either through a window or outside.
- Area 5** Put the antenna outside and point it **straight up**. The antenna cannot be used indoors.

Connect a device that has a multichannel output terminal

- You can connect this unit to an external device fitted with multichannel sound audio output jacks to enjoy music and video.
- The video signal can be connected in the same way as a Blu-ray Disc player / DVD player (see page 16 "Connecting a Blu-ray Disc player / DVD player").

Cables used for connections

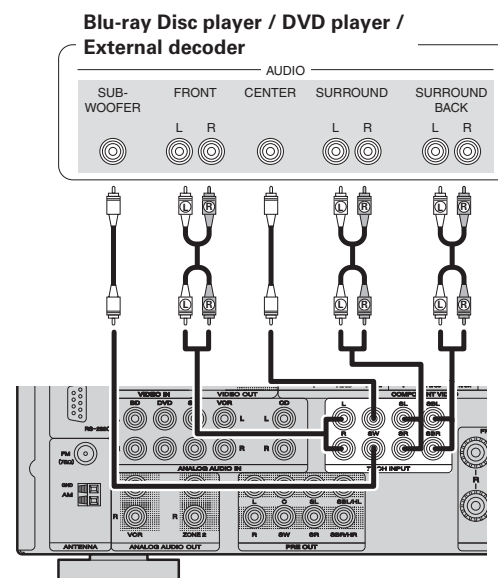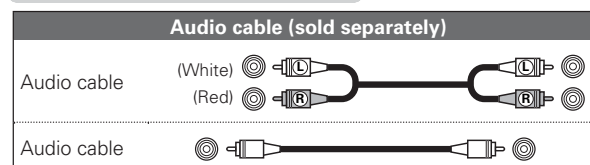

in Set as Necessary

To play analog signals input from 7.1CH INPUT terminals, set "Input Mode" (see page 50) to "7.1CH INPUT". "7.1CH INPUT" can also be selected with **A/D** on the remote control unit.





When a device is connected to the SBL/SBR terminal of 7.1CH INPUT terminals, set "Amp Assign" (see page 56) to "Normal".

Connecting a external power amplifier

- You can use this unit as a pre-amp by connecting a commercially available power amp to the PRE OUT connector. Adding a power amp to each of the channels provides an even greater sound presence.
- Select the connector to use and connect the device.

Cables used for connections

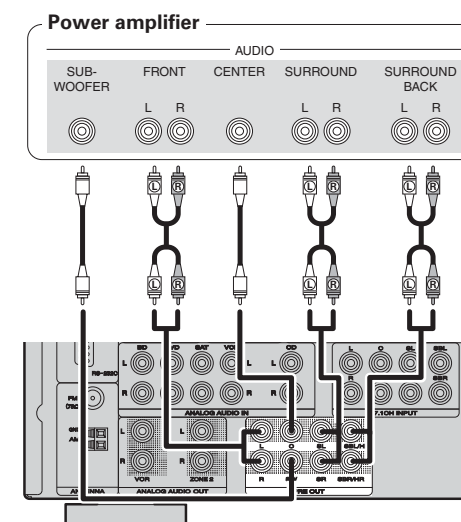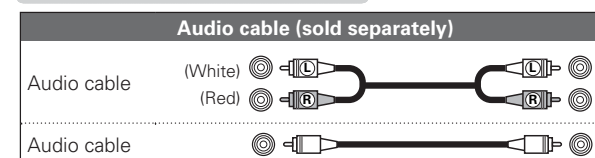

- When using just one surround back speaker, connect it to the left channel (L) terminal.
- Use the volume control on the subwoofer to control subwoofer volume.
- If the subwoofer volume sounds low, use the volume control provided on the subwoofer to adjust the volume.

NOTE

- When speakers have been connected to PRE OUT terminals, do not connect the speakers to the speaker terminals.
- The output channels for the PRE OUT connector change to SBL and SBR in the "Amp Assign" (see page 56) settings in the menu.

Playback (Basic operation)

- ❑ **Selecting the input source** (👉 page 22)
- ❑ **Adjusting the master volume** (👉 page 22)
- ❑ **Turning off the sound temporarily** (👉 page 22)

- ❑ **Playing a Blu-ray Disc player/DVD player** (👉 page 23)
- ❑ **Playing a CD player** (👉 page 23)
- ❑ **Playing an iPod®** (👉 page 23)
- ❑ **Playing a USB memory device** (👉 page 24)
- ❑ **Tuning in radio stations** (👉 page 25)

Selecting a listening mode (Surround mode)
(👉 page 29)

Playback (Advanced operation) (👉 page 39)

Important information

Before starting playback, make the connections between the different components and the settings on the receiver.

NOTE

Also refer to the operating instructions of the connected components when playing them.

Selecting the input source


Press the input source select button (BD, DVD, VCR, SAT, GAME, AUX1, USB, TV, CD, SATR, TUNE, M-XP) twice to play back that source. The desired input source can be selected directly.




You can also use the following operation to select an input source.

❑ Using the “Source Select” menu

- 1 Press **AMP** and then press **SOURCE SEL**. Display the “Source Select” menu.

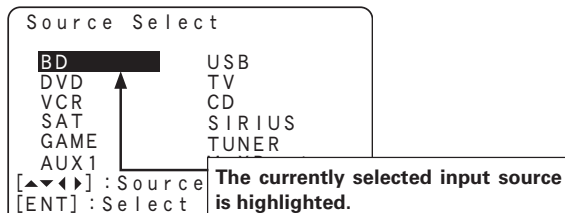


- 2 Use Δ ∇ \triangleleft \triangleright to select the input source, then press **ENTER**. The input source is set and the source selection menu is turned off.



- When using with an iPod connected directly to the USB port of this unit, select “USB” for the input source.
- Input sources that are not going to be used can be set ahead of time. Make this setting at “Source Delete” (👉 page 60).
- To turn off the source selection menu without selecting an input source, press **SOURCE SEL** again.

❑ Operating the remote control unit



- Press **INPUT** Δ ∇ .
- When **INPUT** Δ ∇ is pressed, the input source is switched in the order shown below.



❑ Operating the main unit

Turn **INPUT SELECTOR**.

- Turning **INPUT SELECTOR** switches the input source, as shown below.



Adjusting the master volume

Use **VOLUME** $+$ $-$ to adjust the volume.

- ❑ When the “Volume Display” setting (👉 page 60) is “Relative” [Adjustable range]


--- -80.5dB - 18.0dB

- ❑ When the “Volume Display” setting (👉 page 60) is “Absolute” [Adjustable range] 0.0 - 99.0

- The adjustable range may vary depending on input signal and channel level settings.




You can also operate via the main unit. In this case, perform the following operations. Turn **VOLUME** to adjust the volume.



Turning off the sound temporarily

Press **MUTE**.



- The sound is reduced to the level set at “Mute Level” (👉 page 60).
- To cancel, press **MUTE** again. Muting can also be canceled by adjusting the master volume.

Playing a Blu-ray Disc player/DVD player

The following describes the procedure for playing Blu-ray Disc player/DVD player.

- 1 Prepare for playback.**
 - Turn on the power of the TV, subwoofer and player.
 - Change the TV input to the input of this unit.
 - Load the disc in the player.
- 2 Press ON to turn on power to the unit.**
- 3 Press BD or DVD twice to switch the input source for the player used for playback.**
- 4 Play the component connected to this unit.**

Make the necessary settings on the player (language setting, subtitles setting, etc.) beforehand.



Playing a CD player

The following describes the procedure for playing CD player.

- 1 Prepare for playback.**
 - Turn on the power of the TV, subwoofer and player.
 - Load the disc in the player.
- 2 Press ON to turn on power to the unit.**
- 3 Press CD twice to switch the input source to the CD player.**
- 4 Play the component connected to this unit.**



Playing an iPod®


You can play back both video, photo and audio.

Listening to music on an iPod®

- 1 Connect the iPod® to the USB port** (ⓘ page 19 “Connecting an iPod or USB memory device to the USB Port”)
- 2 Press ON to turn on power to the unit.**
- 3 Press USB twice to switch the input source to “USB”.**

NOTE

If the connections screen is not displayed, the iPod may not be properly connected. Reconnect it.



- 4 Press SEARCH and hold it down for 2 seconds or more to select the display mode.**

- There are two modes for displaying the contents recorded on the iPod.

Remote mode Display iPod information on the TV screen.

- English letters, numbers and certain symbols are displayed. Incompatible characters are displayed as “.” (period).
- In “Remote mode”, the iPod display is as shown at right.



Direct mode Display iPod information on the iPod screen.

- “Direct iPod” is displayed on the display of this unit.

Display mode		Remote mode	Direct mode
Playable files	Music file	✓	✓
	Video file		*
Active buttons	Remote control unit (This unit)	✓	✓
	iPod®		✓

* Only the sound is played.


- 5 Use Δ▽ to select the item, then press ENTER or ▷ to select the file to be played.**

- 6 Press ENTER, ▷ or ▶.**


Playback starts.



- You can specify the duration of the on-screen display to be displayed (default: 30 sec) at menu “USB” (ⓘ page 60). Press Δ▽Δ▽ to return to the original screen.
- To play back compressed audio with extended bass or treble reproduction, we recommend playback in M-DAX mode (ⓘ page 55). The default setting is “OFF”.
- In Remote mode, press **STATUS** during playback to check the title name, artist name, and album name.



iPod operation



Operation buttons	Function
Δ▽Δ▽	Cursor operation
ENTER	Enter
SEARCH (Press and release)	Page search mode
SEARCH (Press and hold)	Direct/Remote mode switching
RETURN	Return
◀◀ (Press and hold)	Manual search (fast-reverse/fast-forward)
▶ (Press and hold)	Playback / Pause
◀▶ (Press and hold)	Auto search (cue)
⏸	Pause
■	Stop
REPEAT	Repeat playback
RANDOM	Shuffle playback
TV POWER	TV power on/standby (Default : Marantz)
TV INPUT	Switch TV input (Default : Marantz)



Repeat playback and shuffle playback can also be set from “Input Setup” – “Playback Mode” (ⓘ page 51) in the menu.

NOTE

- Depending on the type of iPod and the software version, some functions may not operate.
- Note that Marantz will accept no responsibility whatsoever for any problems arising with the data on an iPod when using this unit in conjunction with the iPod.

Playing a USB memory device

Playing back music files recorded on a USB memory device.

Important information

USB memory devices

A USB memory device can be connected to the USB port of this unit to play music files stored on the USB memory device.

- Only USB memory devices conforming to mass storage class can be played on this unit.
- This unit is compatible with USB memory devices in "FAT16" or "FAT32" format.

[Compatible formats]

	USB memory devices *1
WMA (Windows Media Audio)	✓ *2
MP3 (MPEG-1 Audio Layer-3)	✓
MPEG-4 AAC	✓ *3
WAV	✓

*1 USB

- This unit is compatible with MP3 ID3-Tag (Ver. 2) standards.
- This unit is compatible with WMA META tags.

*2 Copyright-protected files can not be played.

*3 Only files that are not protected by copyright can be played on this unit.

Also, files encoded in WMA format when ripped from a CD, etc. on a computer may be copyright protected, depending on the computer's settings.

[Compatible formats]

	Sampling frequency	Bit rate or Bit length	Extension
WMA (Windows Media Audio)	32/44.1/48 kHz	48 – 192 kbps	.wma
MP3 (MPEG-1 Audio Layer-3)	32/44.1/48 kHz	32 – 320 kbps	.mp3
MPEG-4 AAC	32/44.1/48 kHz	16 – 320 kbps	.m4a
WAV	32/44.1/48 kHz	16 bit	.wav

Playing files stored on USB memory devices

1 Connect the USB memory device to the USB port (page 19 "Connecting an iPod or USB memory device to the USB Port").

2 Press **USB** twice to switch the input source to "USB".

3 Press $\Delta \nabla$ to select the search item or folder, then press **ENTER** or \triangleright .

4 Press $\Delta \nabla$ to select the file, then press **ENTER**, \triangleright or \blacktriangleright . Playback starts.



- You can specify the duration of the on-screen display to be displayed (default: 30 sec) at menu "USB" (page 60). Press $\Delta \nabla \triangleleft \triangleright$ to return to the original screen.
- To play back compressed audio with extended bass or treble reproduction, we recommend playback in M-DAX mode (page 55). The default setting is "High".
- If the USB memory device is divided into multiple partitions, only the top partition can be selected.
- This unit is compatible with MP3 files conforming to "MPEG-1 Audio Layer-3" standards.

NOTE

- Note that Marantz will accept no responsibility whatsoever for any problems arising with the data on a USB memory device when using this unit in conjunction with the USB memory device.
- USB memory devices will not work via a USB hub.
- Marantz does not guarantee that all USB memory devices will operate or be supplied power. When using a USB portable hard disk that can draw power from an AC adapter, we recommend using the AC adapter.
- It is not possible to connect and use a computer via the USB port of this unit using a USB cable.

USB operation



Operation buttons	Function
$\Delta \nabla \triangleleft \triangleright$	Cursor operation
ENTER	Enter
SEARCH	Page search
RETURN	Return
$\triangleleft \triangleleft \triangleright \triangleright$ (Press and hold)	Manual search (fast-reverse/fast-forward)
\blacktriangleright	Playback/Pause
$\triangleleft \triangleleft \triangleright \triangleright$	Auto search (cue)
II	Pause
■	Stop
REPEAT	Repeat playback
RANDOM	Shuffle playback
TV POWER	TV power on/standby (Default : Marantz)
TV INPUT	Switch TV input (Default : Marantz)



Repeat playback and shuffle playback can also be set from "Input Setup" – "Playback Mode" (page 51) in the menu.

Tuning in radio stations

Important information

About SIRIUS XM radio

To listen to Satellite Radio, you'll need to connect either a SIRIUS or XM Satellite Radio tuner (sold separately) to your satellite-ready receiver. Satellite Radio is available to residents of the US (except Alaska and Hawaii) and Canada.

Satellite Radio delivers a variety of commercial-free music from categories ranging from Pop, Rock, Country, R&B, Dance, Jazz, Classical and many more plus coverage of all the top professional and college sports including play by play games from select leagues and teams. Additional programming includes expert sports talk, uncensored entertainment, comedy, family programming, local traffic and weather and news from your most trusted sources.

Whether you purchase a SIRIUS or XM tuner, you'll need to activate and subscribe to begin enjoying the service. Easy to follow installation and setup instructions are provided with the satellite tuners. Whichever service you choose, there are a variety of programming packages available, including the option of adding "The Best of SIRIUS" programming to your XM tuner or "The Best of XM" programming to your SIRIUS tuner, enabling you to enjoy the most popular programming among both services. The "Best of" packages are not available to SIRIUS or XM Canada subscribers at this time.

Family friendly packages are also available to restrict channels featuring content that may be inappropriate for children.

To subscribe to XM, U.S. customers should visit xmradio.com or call 1-800-XMRADIO (1-800-967-2346); Canadian customers should visit xmradio.ca or call XM Listener Care at 1-877-GETXMSR (1-877-438-9677).

To subscribe to SIRIUS, U.S. and Canadian customers can call 1-888-539-SIRI (1-888-539-7474) or visit sirius.com (US) or siriuscanada.ca (Canada).

SIRIUS XM radio legal


SIRIUS, XM and all related marks and logos are trademarks of Sirius XM Radio Inc. and its subsidiaries. All other marks and logos are the property of their respective owners. All rights reserved. SIRIUS and XM subscriptions sold separately. Taxes and a one-time activation fee may apply. XM tuners and home docks or SIRIUS tuners (each sold separately) are required to receive the SIRIUS or XM satellite radio service. All programming and fees subject to change. It is prohibited to copy, decompile, disassemble, reverse engineer, hack, manipulate or otherwise make available any technology or software incorporated in receivers compatible with the SIRIUS or XM Satellite Radio Systems. **Service not available in Alaska and Hawaii.**

Listening to SIRIUS satellite radio


1 Press SATR twice to switch the input source to "SIRIUS".

2 Use TUNING + or TUNING - to select the channel.

When the channel is tuned in, the name of the song and artist are displayed.

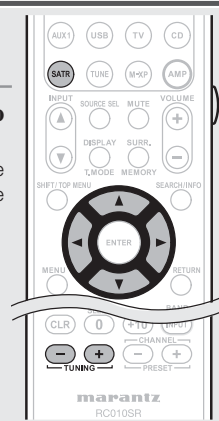


- The channel switches continuously when **TUNING +** or **TUNING -** is pressed and held.
- You can specify the duration of the on-screen display to be displayed (default: 30 sec) at menu "TUNER" (page 60). Press $\Delta \nabla \triangleleft \triangleright$ to return to the original screen.
- The song title, artist name, composer name, category and reception level can be checked by pressing **STATUS**.



Checking the SIRIUS signal strength and radio ID

1 Press STATUS until "SIGNAL" appears on the display.

The display will switch as shown below, depending on the reception conditions.




Display	Status
EXCELLENT	Signal strength is excellent
GOOD	Signal strength is good
WEAK	Signal strength is weak
NO SIGNAL	No signal

2 Adjust the position of the antenna until "SIGNAL: EXCELLENT" is shown on the display.

3 Press STATUS until the channel (example: "SR001") is displayed.

4 Press TUNING + or TUNING - and select channel 0 (SR000).

Channel No. and Sirius ID are alternately shown on the display.



- Write your own SIRIUS ID for storage use.

Sirius ID : _____



The strength of both the SIRIUS satellite and terrestrial signals can be checked "Antenna Aiming" (page 47).

❑ Presetting radio channels (Preset memory)

Your favorite broadcast channels can be preset so that you can tune them in easily. Up to 56 channels can be preset.

- 1** Tune in the broadcast channel you want to preset.
- 2** Press **MEMORY**.
- 3** Press **SHIFT** to select the block (A to G) in which to preset the channel (1 to 8 per block), then press **PRESET +**, **PRESET -** or **1 - 8** to select the preset number.
- 4** Press **MEMORY** again to complete the setting.
 - To preset other stations, repeat steps 1 to 4.



NOTE

Preset channels are erased by overwriting them.

❑ Listening to preset channels

Press **PRESET +**, **PRESET -** to select the desired preset channel, then press **ENTER**.

- Preset channels can also be selected by pressing **SHIFT/TOP MENU** (Block) and **1 - 8** (Channel).



❑ Searching categories

- 1** Press **<>**.
- 2** Use **<>** to select the category, to use **Δ∇** to select the desired channel.

❑ Accessing SIRIUS satellite radio channels directly


- 1** Press **SEARCH/INFO**.
- 2** Press **0 - 9** to input the channel.
 Example: Accessing channel "SR123": Press **1**, **2** and **3**.
 - If no button is pressed within several seconds, the channel automatically switches to the one whose number has been input.
- 3** Press **ENTER** to set that channel.
 Reception switches to the selected channel.



- "UPDATING" is displayed while the encoding code is being updated.
- "SIRIUS UPDATING" is displayed when updating SIRIUS tuner firmware.
- Refer to "Troubleshooting" - "SIRIUS Satellite Radio" (page 81) regarding other messages.


❑ Parental Lock

- 1** Tune to the channel you want to lock.
- 2** Press **ENTER** for at least 3 seconds.
 "Enter Lock Code" is displayed.
- 3** Enter the 4-digit lock code using **Δ∇<>** or **0 - 9**.
 When you enter the correct code, the corresponding channel is locked.
- 4** Press **ENTER**.

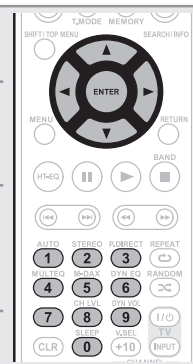

- Channels under Parental Lock cannot be tuned in by performing channel up/down or by category search.
- Channels stored in preset memory can be tuned in by the preset channel select operation, even if Parental Lock is applied.
- When a channel to which Parental Lock is applied is being played, Parental Lock for that channel is cancelled by performing step 2.
- See "Edit Lock Cord" (page 47) for the method of changing Parental Lock Cord.
- You can also set "Parental Lock" (page 47) from the menu.

❑ SIRIUS operation



Operation buttons	Function
PRESET +, -	Preset channel selection
△▽◀▶	Cursor operation / Category search
ENTER (Press and hold)	To parental lock password check screen
SEARCH	Direct search
RETURN	Return
TUNING +, -	Channel selection
0 - 9	Preset channel selection (1 - 8) / Channel direct call
SHIFT	Preset channel block selection
MEMORY	Preset memory registration
TV POWER	TV power on/standby (Default : Marantz)
TV INPUT	Switch TV input (Default : Marantz)

Listening to FM/AM broadcasts


1 Press **TUNE** twice to switch the input source to “TUNER”.

2 Press **BAND** to select “FM” or “AM”.

FM When listening to an FM broadcast.

AM When listening to an AM broadcast.

3 Tune in the desired broadcast station.

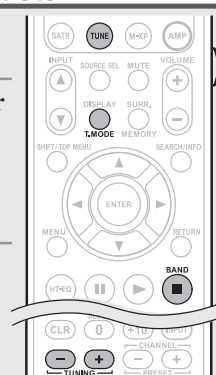

① **To tune in automatically (Auto tuning)**

Press **T.MODE** to light the “AUTO” indicator on the display, then use **TUNING +** or **TUNING -** to select the station you want to hear.

② **To tune in manually (Manual tuning)**

Press **T.MODE** to turn off the display's “AUTO” indicator, then use **TUNING +** or **TUNING -** to select the station you want to hear.



- If the desired station cannot be tuned in with auto tuning, tune it in manually.
- When tuning in stations manually, press and hold **TUNING +** or **TUNING -** to change frequencies continuously.
- You can specify the duration of the on-screen display to be displayed (default: 30 sec) at menu “TUNER” (page 60). Press **△▽◀▶** to return to the original screen.

❑ Presetting radio stations (Manual preset)

Your favorite broadcast stations can be preset so that you can tune them in easily. Up to 56 stations can be preset.

- **Stations can be preset automatically at “Auto Preset”** (page 47). If “Auto Preset” is performed after performing “Manual Preset”, the “Manual Preset” settings will be overwritten.

1 Tune in the broadcast station you want to preset.

2 Press **MEMORY**.

3 Press **SHIFT/TOP MENU** to select the block (A to G) in which to preset the channel (1 to 8 per block), then press **PRESET +**, **PRESET -** or **1 - 8** to select the preset number.

4 Press **MEMORY** again to complete the setting.

- To preset other stations, repeat steps 1 to 4.



Default settings

Block (A - G) and Channel (1 - 8)	Default Settings
A1 - A8	87.5 / 89.1 / 98.1 / 107.9 / 90.1 / 90.1 / 90.1 / 90.1 MHz
B1 - B8	520 / 600 / 1000 / 1400 / 1710 kHz, 90.1 / 90.1 / 90.1 MHz
C1 - C8	90.1 MHz
D1 - D8	90.1 MHz
E1 - E8	90.1 MHz
F1 - F8	90.1 MHz
G1 - G8	90.1 MHz


Specify a name for the preset broadcast station (Preset Name) (page 48)

Listening to preset stations


- 1 Press **SHIFT/TOP MENU** to select the memory block (A to G).
- 2 Press **PRESET +**, **PRESET -** or **1 - 8** to select the desired preset channel.



You can also operate via the main unit. In this case, perform the following operations. Press $\triangleleft \triangleright$ to select the preset radio station.



Tuner (FM/AM) operation




Operation buttons	Function
PRESET +, -	Preset channel selection
$\triangleleft \triangleright \triangleleft \triangleright$	Cursor operation
ENTER	Enter
SEARCH	Direct frequency tuning
BAND	FM/AM switching
T.MODE	Switch search modes
TUNING +, -	Tuning (up/down)
0 - 9	Preset channel selection (1 - 8) / Direct frequency tuning (0 - 9)
SHIFT	Preset channel block selection
MEMORY	Preset memory registration
TV POWER	TV power on/standby (Default : Marantz)
TV INPUT	Switch TV input (Default : Marantz)

Switching the tuning increment

The tuning increment factory settings are 9kHz for AM, and 0.05 MHz for FM.

ON/STANDBY AUTO DISPLAY

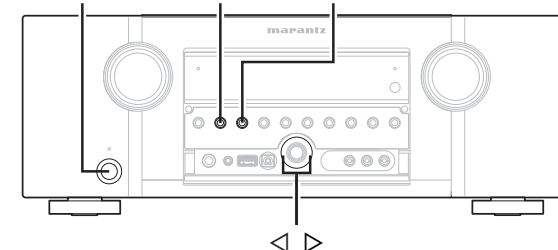

- 1 While pressing down **AUTO** and **DISPLAY**, press **ON/STANDBY** to turn on the power. "Step \triangleleft AM9/FM50 \triangleright " appears on the display.

- 2 Press $\triangleleft \triangleright$. "Step \triangleleft AM10/FM200 \triangleright " appears on the display, and the tuning increment is switched to AM and FM are 10 kHz and 0.2 MHz.

- 3 Press **ON/STANDBY**.

- The tuner preset memory will be cleared if this operation is performed.
- This setting will not revert to the default values even when the microprocessor is reset.

Direct frequency tuning

You can enter the receiving frequency directly to tune in.

- 1 Press **SEARCH/INFO**.
- 2 Input frequencies using the **0 - 9**.
 - If \triangleleft is pressed, the immediately preceding input is cancelled.
- 3 When setting is completed, press **ENTER**.
The preset frequency is tuned in.



Selecting a listening mode (Surround mode)


This unit can play input audio signals in multi-channel surround mode or in stereo mode.
Select a listening mode suitable for the playback contents (cinema, music, etc.) or according to your liking.

Listening mode


Input audio signal	Playback	Listening mode	
<div>2-channel</div> <div>Multi channel</div>		<div>Multi-channel playback</div> <div>(page 29)</div>	<p>For 2-channel signal input:</p> <ul style="list-style-type: none"> Surround-channel signals are created and played with surround playback. <p>For multichannel signal input:</p> <ul style="list-style-type: none"> The surround signal recorded in source is played as surround playback. (The sound is played according to the settings of the speaker size in "Speaker Config." (page 56).) Surround-back-channel or front-height-channel signals that are not recorded in source can be created.
<div>2-channel</div> <div>Multi channel</div>		<div>Stereo playback</div> <div>(page 31)</div>	<ul style="list-style-type: none"> If multichannel signals are input, they are mixed down to 2-channel audio and are played. Subwoofer signal is also output.
<div>2-channel</div> <div>Multi channel</div>		<div>Direct playback</div> <div>(page 31)</div>	<p>Sound recorded in source is played as is.</p> <ul style="list-style-type: none"> Surround back signals or front height signals are not created. In this mode, the following items cannot be adjusted. <ul style="list-style-type: none"> Tone (page 53) Dynamic EQ (page 54) M-DAX (page 55) MultEQ (page 53) Dynamic Volume (page 54)
<div>2-channel</div> <div>Multi channel</div>		<div>Dolby Virtual Speaker/</div> <div>Dolby Headphone</div> <div>playback (page 31)</div>	<p>Virtual Surround processing is performed on 2-channel or multichannel input signals that are played back.</p>



- Some listening modes cannot be selected, depending on the audio format or number of channels of the input signal. For details, see "Types of input signals, and corresponding surround modes" (page 76).
- Adjust the sound field effect with the menu "Surround Parameter" (page 52) to enjoy your favorite sound mode.
- You can select the listening mode by pressing **SURROUND MODE** on the main unit.
Press **SURROUND MODE** and the modes are switched as shown below.



* For "AUTO", press **AUTO** on the amplifier or remote control.

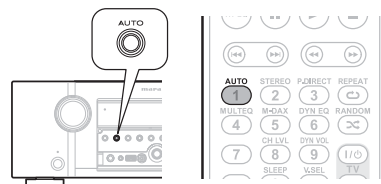


Multi-channel playback

Surround playback of 2-channel sources

1 Playing the source (page 23–27).

2 Press **SURR.** to select the surround decoder to play back multichannel sound.



- Each time **SURR.** is pressed, the surround mode is switched.
Which decoder can be selected depends on the settings of "Amp Assign" (page 56) or "Speaker Config." (page 56).

DOLBY PLIIz *1 This mode is for 7.1-channel surround playback using the front height speakers.
• "PLIIz Height" is displayed.

DOLBY PLIIx *2 This mode is for 7.1-channel or 6.1-channel surround playback using the surround back speakers.
• "PLIIx Movie", "PLIIx Music" or "PLIIx Game" is displayed.

DOLBY PLII This mode is for 5.1-channel surround playback. Select this mode if no front height speaker nor surround back speaker is to be used.
• "PLII Movie", "PLII Music" or "PLII Game" is displayed.

DTS NEO:6 This mode is for 7.1-channel, 6.1-channel or 5.1-channel surround playback using the surround back speakers.
• "DTS NEO:6 Cinema" or "DTS NEO:6 Music" is displayed.

MULTI CH STEREO This mode is for enjoying stereo sound from all speakers.

NEURAL *3 This mode is for 7.1-channel, 6.1-channel or 5.1-channel surround playback using the surround back speakers.
• "NEURAL" is displayed.

*1 This can be selected when the "Amp Assign" (page 56) setting in the menu is set to "Normal", and the "Front Speaker Setup" setting (page 58) is set to "A".
This cannot be selected when the "Speaker Config." – "Front Height" is set to "None".

*2 This can be selected when "Amp Assign" is set to "Normal" or "Speaker Config." – "S.Back" is not set to "None".

*3 This mode supports analog 2-channel audio, and linear PCM 2 channel (44.1 kHz, 48 kHz) audio.

Surround playback of multi-channel sources (Dolby Digital, DTS etc.)

1 Playing the source (☞ page 23 – 27).

2 Press **SURR.** to select the surround decoder to play back multichannel sound.



Select the surround mode while viewing the display on the screen (☞ "Displaying the currently playing surround mode" at right).


- Which decoder can be selected depends on the input signal, the settings of "Amp Assign" (☞ page 56) or "Speaker Config." (☞ page 56).

Displaying the currently playing surround mode

Input signal	Surround mode	Display
DOLBY DIGITAL (2ch)	NEURAL	NEURAL
DOLBY DIGITAL (other than 2ch) / DOLBY DIGITAL EX	DOLBY DIGITAL	DOLBY DIGITAL
	DOLBY DIGITAL EX	DOLBY DIGITAL EX
	DOLBY DIGITAL + PLIIx Movie	DDD+ PLIIx Movie
	DOLBY DIGITAL + PLIIx Music	DDD+ PLIIx Music
	DOLBY DIGITAL + PLIIz	DOLBY D + PLIIz
DOLBY DIGITAL Plus	DOLBY DIGITAL Plus	DOLBY DIGITAL +
	DOLBY DIGITAL Plus + EX	DOLBY D + + EX
	DOLBY DIGITAL Plus + PLIIx Movie	DDD + + PLIIx Mv
	DOLBY DIGITAL Plus + PLIIx Music	DDD + + PLIIx Ms
	DOLBY DIGITAL Plus + PLIIz	DOLBY D + + PLIIz
DOLBY TrueHD	DOLBY TrueHD	DOLBY TrueHD
	DOLBY TrueHD + EX	DOLBY HD +EX
	DOLBY TrueHD + PLIIx Movie	DDHD +PLIIx Mv
	DOLBY TrueHD + PLIIx Music	DDHD +PLIIx Ms
	DOLBY TrueHD + PLIIz	DOLBY HD +PLIIz
DTS (5.1ch) / DTS-ES Discrete 6.1 / DTS-ES Matrix 6.1 / DTS 96/24	DTS SURROUND	DTS SURROUND
	DTS + PLIIx Movie	DTS + PLIIx Mv
	DTS + PLIIx Music	DTS + PLIIx Ms
	DTS + PLIIz	DTS + PLIIz
	DTS + NEO:6	DTS + NEO:6
	DTS ES MTRX6.1 *1	DTS ES MTRX6.1
	DTS ES DSCRT6.1 *2	DTS ES DSCRT6.1
DTS-HD	DTS 96/24 *3	DTS 96/24
	DTS-HD HI RES	DTS-HD HI RES
	DTS-HD MSTR	DTS-HD MSTR
	DTS-HD + NEO:6	DTS-HD + NEO:6
	DTS-HD + PLIIx Movie	DTS-HD + PLIIx Mv
	DTS-HD + PLIIx Music	DTS-HD + PLIIx Ms
	DTS-HD + PLIIz	DTS-HD + PLIIz
PCM (multi ch)	DTS Express	DTS Express
	MULTI CH IN	MULTI CH IN
	MULTI IN + Dolby EX	MULTI +Dolby EX
	MULTI IN + PLIIx Movie	MULTI IN +PLIIx Mv
	MULTI IN + PLIIx Music	MULTI IN +PLIIx Ms
	MULTI IN + PLIIz	MULTI IN +PLIIz
All Input signal	MULTI CH IN 7.1	MULTI CH IN 7.1
	Dolby VIRTUAL SPEAKER	DOLBY VS

- *1 This is displayed when the input signal is "DTS-ES Matrix 6.1".
- *2 This is displayed when the input signal is "DTS-ES Discrete 6.1".
- *3 This is displayed when the input signal is "DTS 96/24".

[Views on the display]



- ① Shows a decoder to be used.
 - A DOLBY DIGITAL Plus decoder is displayed as "DOLBY D +".
- ② Shows a decoder that creates sound output from the surround back speakers.
 - "+ PLIIz" indicates the front height sound from front height speakers.



For an input signal that can be reproduced in each surround mode, see "Surround modes and surround parameters" (☞ page 74).


Stereo playback

This is the mode for playing in stereo. The tone can be adjusted.

- Sound is output from the front left and right speakers and subwoofer.
- If multichannel signals are input, they are mixed down to 2-channel audio and are played.

1 Playing the source (☞ page 23 – 27).

2 Press **STEREO**.
Stereo playback begins.



Direct playback



Sound recorded in source is played as is.

- Surround back signals or front height signals are not created.
- In this mode, the following items cannot be adjusted.
 - Tone (☞ page 53)
 - MultEQ® (☞ page 53)
 - Dynamic EQ® (☞ page 54)
 - Dynamic Volume® (☞ page 54)
 - M-DAX (☞ page 55)

1 Playing the source (☞ page 23 – 27).

2 Press **P.DIRECT** to select the direct mode.

- If **PURE DIRECT** on the main unit is pressed, the same function as with the remote control unit can be obtained.



- Each time **P.DIRECT** is pressed, the direct mode is switched.

Source Direct This mode plays back tracks at high sound quality without passing through the sound quality adjustment circuits.

Pure Direct * This mode plays back tracks at the closest to the original sound quality.

Auto This mode detects the type of input digital signal, and automatically selects the corresponding mode for playback.

- * The following circuits that affect sound quality are set to off.
- Main unit's display circuit (The display is turned off.)
 - Analog video input/output circuit



- To cancel, press **P. DIRECT** again.
- Video signals are only output when HDMI signals are played in the PURE DIRECT mode.

NOTE

When in the PURE DIRECT mode, the menu screen is not displayed.

Dolby Virtual Speaker/Dolby Headphone playback


Dolby Virtual Speaker mode

This delivers a full surround sound experience from two stereo speakers.

- Sound is output from the front left and right speakers.
- If multichannel signals are input, they are mixed down to 2-channel audio.

1 Playing the source (☞ page 23 – 27).

2 Press **SURR.** to select “DOLBY VS”.



Dolby Headphone mode

You can enjoy listening to multi-channel surround sound through headphones using this mode.

Press SURR. to select the Dolby Headphone mode.



- Each time **SURR.** is pressed, the Dolby Headphone mode is switched.

DOLBY HEADPHONE This is the surround mode for listening with headphones. The surround sound field is played through regular headphones.

DOLBY HP BYPASS The sound is played in the normal stereo mode rather than the surround mode when listening with headphones.

DOLBY HP PLII Movie This mode is best suited for movie sources.







DOLBY HP PLII Music This mode is best suited for music sources.

NOTE

- The surround mode returns to the previous setting as soon as the plug is removed from the jack.
- In headphone mode, Tone Control is not available.
- You can select Dolby HP PLII Movie or Dolby HP PLII Music when a 2-channel source is played back.

Advanced version

Here, we explain functions and operations that let you make better use of this unit.

- **Speaker installation/connection (Other than 7.1-channel system with surround back speakers)**  **page 33**
- **Connections (Advanced connection)**  **page 38**
- **Playback (Advanced operation)**  **page 39**
- **How to make detailed settings**  **page 43**
- **Other settings**  **page 62**
- **Operating the connected devices by remote control unit**  **page 63**

Speaker installation/connection (Other than 7.1-channel system with surround back speakers)

This section explains a wide range of speaker installation/connection/setting procedures.

For details on installing/connecting/setting 7.1 channel audio that uses surround back speakers, see "Simple version (Simple setup guide)" (page 3).

Use the Audyssey® Auto Setup function of this unit to automatically detect the number of connected speakers and perform optimal settings for the speakers to be used.

Procedure for speaker settings

Install

Connect (page 34)


Set up speakers (page 37)

Install

This unit is compatible with Dolby Pro Logic IIz (page 78), which offers an even wider and deeper surround sensation. When using Dolby Pro Logic IIz, install front height speakers.



Install the surround back speakers in a position 2 to 3 ft (60 to 90 cm) higher than ear level.

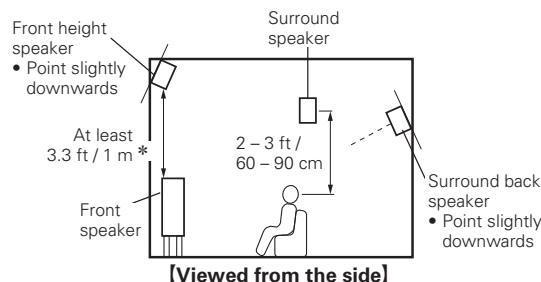


* Recommended for Dolby Pro Logic IIz

NOTE


It is not possible to use the surround back speakers and front height speakers simultaneously.

When 7.1ch (Front height speaker) installed

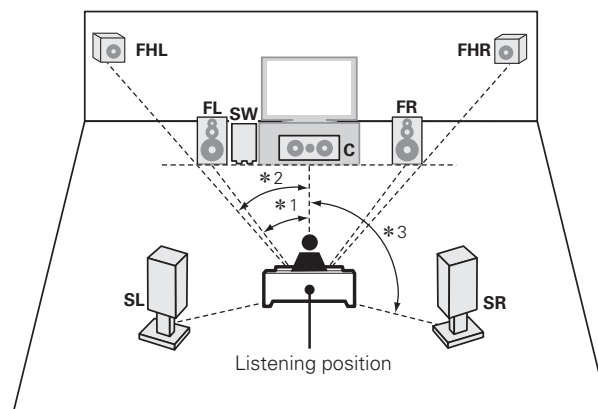


* 1 22° - 30° * 2 22° - 45° * 3 90° - 110°

When 5.1ch installed

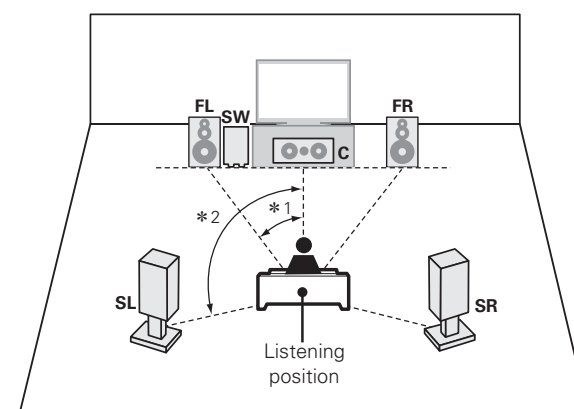


* 1 22° - 30° * 2 120°

When 6.1ch (Surround back speaker) installed

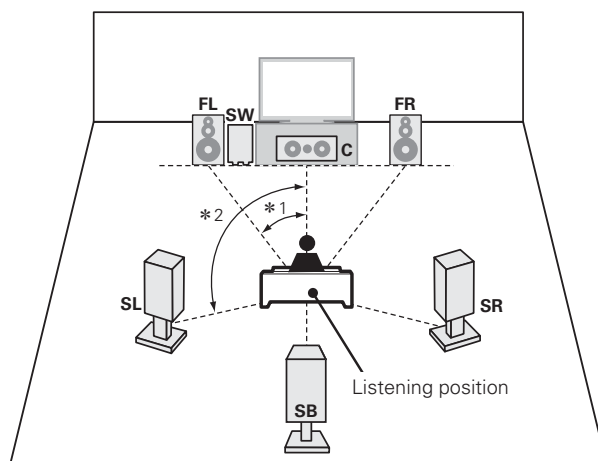

* 1 22° - 30° * 2 90° - 110°

When 2.1ch installed

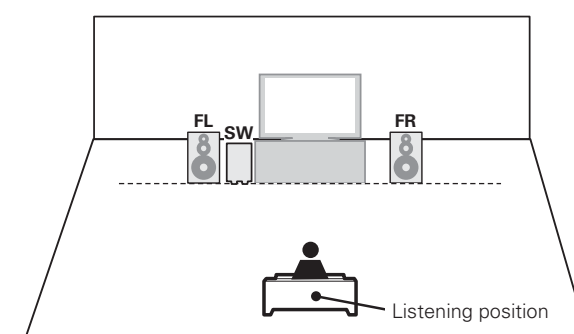


FL Front speaker (L)
FR Front speaker (R)
C Center speaker
SW Subwoofer
SL Surround speaker (L)
SR Surround speaker (R)
SB Surround back speaker
FHL Front height speaker (L)
FHR Front height speaker (R)

Connect

- For the method of connecting the 7.1-channel system with surround back speakers, see page 4.
- For the method of connecting the TV, see page 5.

7.1-channel (Front height speaker) connection

For 7.1-channel (Front height speaker) playback, set "Amp Assign" in "Set up speakers" (page 37) to "Normal".

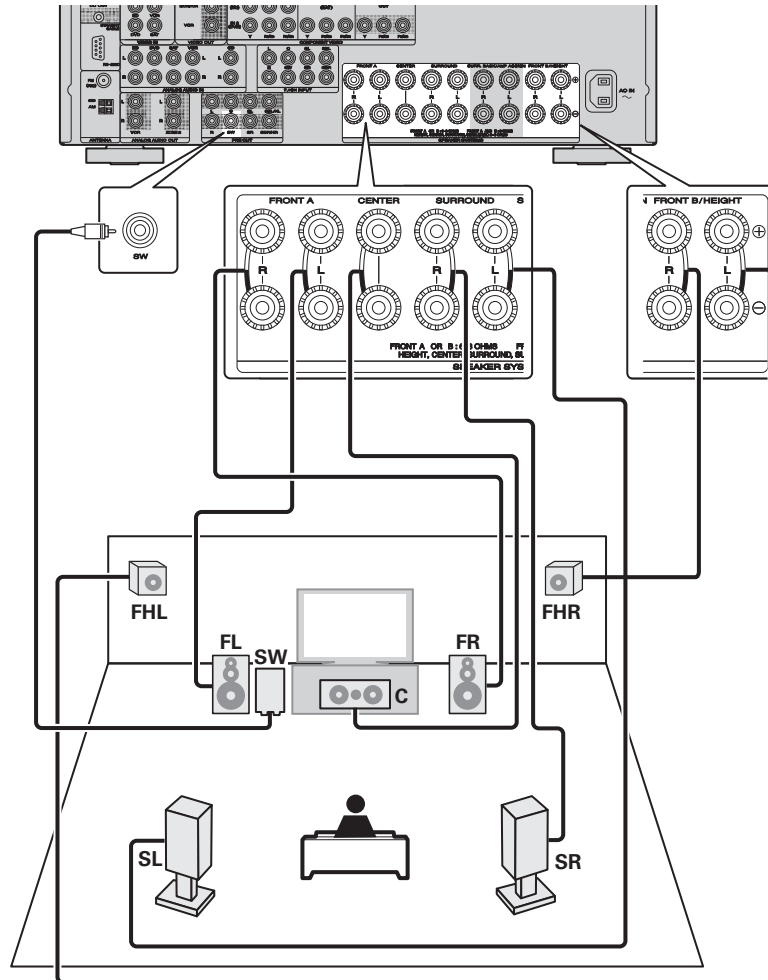


6.1-channel (Surround back speaker) connection

If a single surround back speaker is to be used (with a 6.1-channel connection), connect it to the "L" terminals of the SURR. BACK/AMP ASSIGN terminal.


For speaker settings in this case, see "When 6.1ch (Surround back speaker) installed" (page 33).

For 6.1-channel (Surround back speaker) playback, set "Amp Assign" in "Set up speakers" (page 37) to "Normal".

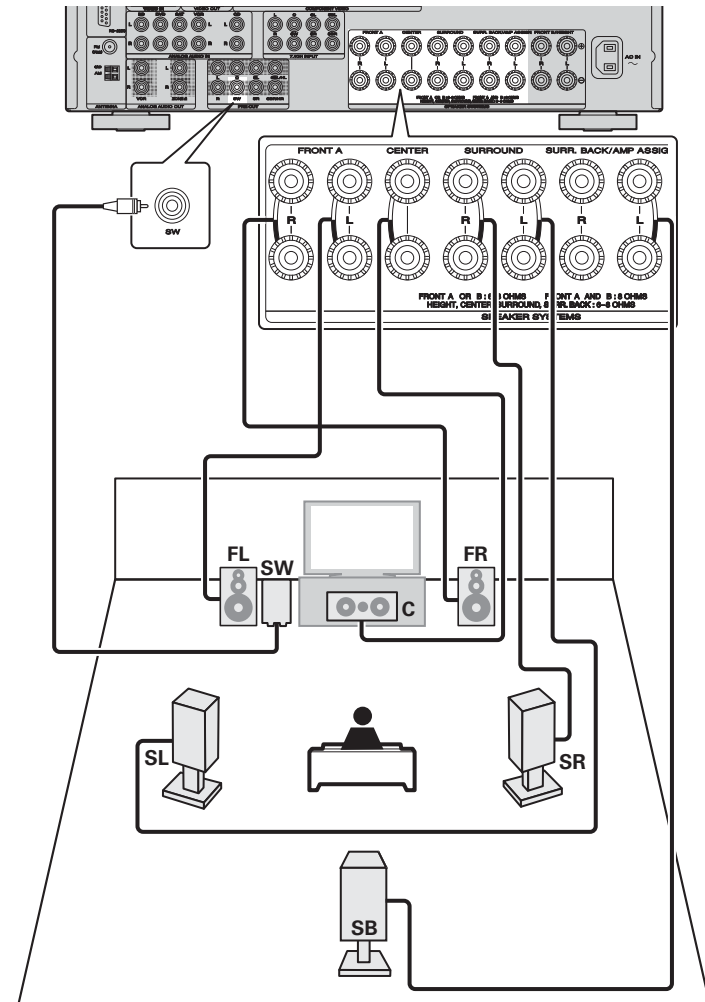


5.1-channel connection

For 5.1-channel playback, set "Amp Assign" in "Set up speakers" (page 37) to "Normal".

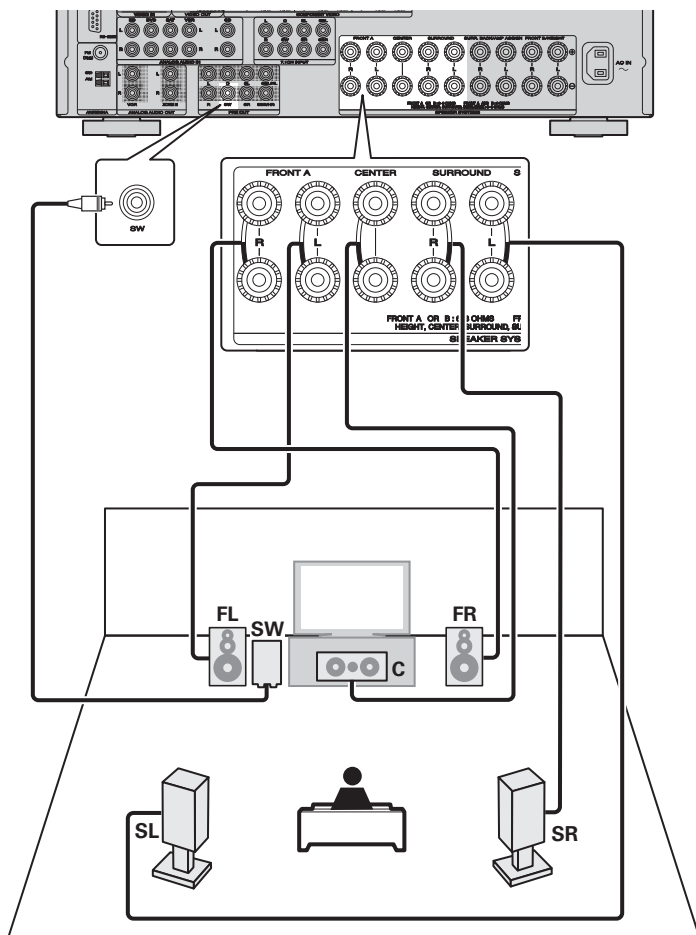

Front A/B connection

The second set of front speakers can be connected to the FRONT B/HEIGHT terminals. In this case, set "Front Speaker Setup" (page 58) of "Speaker Setup" to "B" or "A+B".

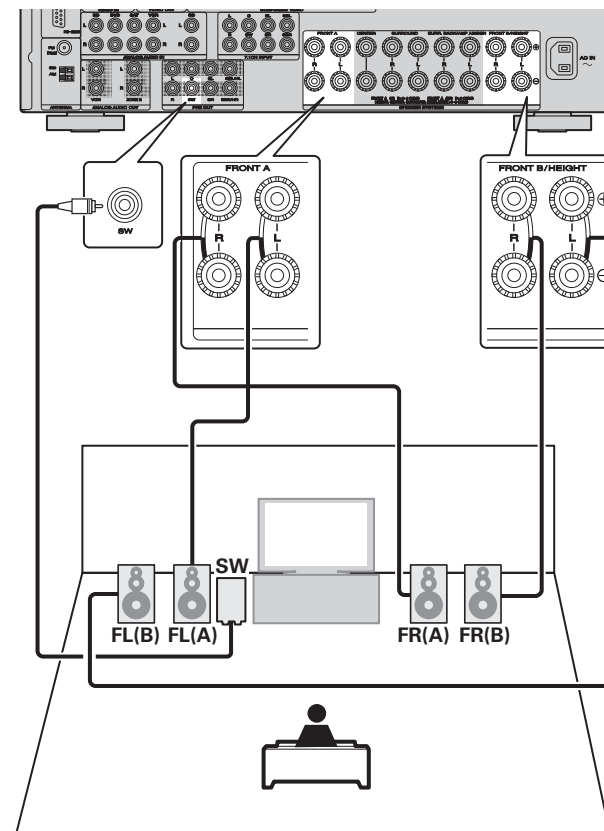


For surround playback of a multichannel source, if you connect the center speaker, surround speakers, surround back speakers and subwoofers, 7.1-channel playback is available. Front speakers can be used separately, depending on the speaker's specifications or playback source such as front speakers (A) for multichannel playback and front speakers (B) for 2-channel playback (page 58 "Front Speaker Setup").

NOTE

When using speakers A and B at the same time, check the impedance of the connected speakers (page 4).


2.1-channel/2-channel connection

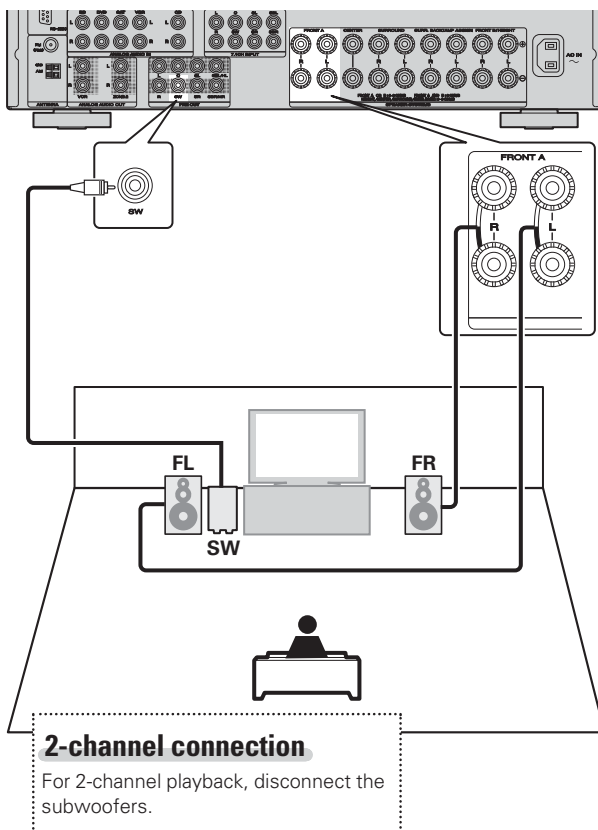

Bi-amp connection

A bi-amp connection is to connect separate amplifiers to the tweeter terminals and woofer terminals of speakers compatible with the bi-amp function. This prevents the back electromotive force (returned force without output) of the woofer sent to the tweeter, which affects the sound quality of the tweeter, and you can enjoy playback with higher-quality sound.

In this case, set "Amp Assign" of "Set up speakers" (page 37) to "SPKR-C".

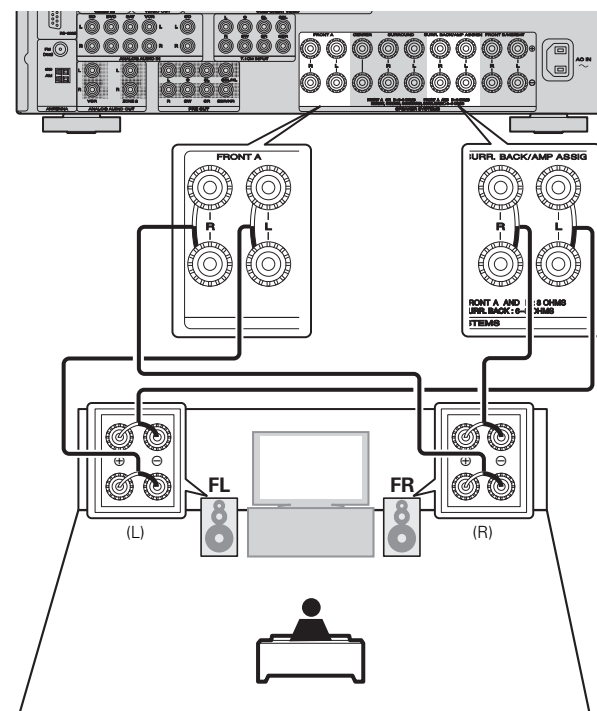

When making a bi-amp connection, the same signal is output from the FRONT A terminal and the SURR. BACK/AMP ASSIGN terminal.

For surround playback of a multichannel source, if you connect the center speaker, surround speakers and subwoofers, 5.1-channel playback is available.

NOTE

- Use speakers compatible with bi-amp connections.
- When making bi-amp connections, be sure to remove the short-circuiting plate or wire between the speaker's woofer and tweeter terminals.

Set up speakers

around items indicate the settings.

This section provides the setup methods of speaker systems other than the 7.1-channel system (with surround back speakers).

For the setup methods of the 7.1-channel system with surround back speakers, see "Set up speakers (Audyssey® Auto Setup)" (page 6) of "Simple version".

First install and connect the speakers to this unit.


1 Set up the remote control unit

- Set up the operation mode
Press **AMP** to set the remote control unit to amplifier operation mode.



Press **AMP**

2 Connect the setup microphone.



When the setup microphone is connected, the following screen is displayed.

```

3-1. Audyssey Auto Setup
Please place microphone
at ear height at
main listening position.
F. Height : Measure
Front Sp. : A
Amp Assign: Normal
Start
Cancel
[ENT] : Select [RTN] : Back
    
```

3 Set up "Amp Assign"

Use Δ ∇ to select "Amp Assign".

```

3-1. Audyssey Auto Setup
Please place microphone
at ear height at
main listening position.
F. Height : Measure
Front Sp. : A
Amp Assign: Normal
Start
Cancel
[RTN] : Back
    
```

4 Use \triangleleft \triangleright to select the configuration of the connected speakers.

- Normal** Set when using 7.1-channel (Front/Center/Surround/Surround Back or Front height/Subwoofer) speakers.
- ZONE2** Set for connecting the speakers for ZONE2 to the SURR. BACK/ AMP ASSIGN terminals.
- SPKR-C** Set for connecting a tweeter of a front speaker to the SURR. BACK/AMP ASSIGN terminals and a woofer of the front speaker to the FRONT A terminals.

5 Set up "F. Height"

Press Δ to select "F. Height".

- Measure** Set to measure the front height speakers.
- Skip** Set not to measure the front height speakers.

6 Set up "Front.Sp."

Use Δ ∇ to select "Front Sp." and then press \triangleleft \triangleright to select a speaker.

- A** Select this to use front speaker A.
- B** Select this to use front speaker B.
- A+B** Select this to use front speakers A and B simultaneously.

NOTE


If "Measure" is selected in step 5, select "A". If "B" is selected, the "F.Height" measurement cannot be performed.

7 Proceed to page 8 "Preparation" step 5.

NOTE

After performing Audyssey Auto Setup, do not change the speaker connections or subwoofer volume. In event of a change, perform Audyssey Auto Setup again.

Remote control operation buttons



Connections (Advanced connection)

REMOTE CONTROL jacks

When you use this unit connected to Marantz audio components, it sends operation signals to operate each component.


□ Connection

Use the remote connection cable (supplied with a Marantz audio component you want to connect) to connect the REMOTE CONTROL OUT terminal of this unit to the REMOTE CONTROL IN terminal of the component to be connected.

□ Setting

Set the remote control switch located on the rear panel of the connected audio component to "EXTERNAL" or "EXT." to use this feature.

- This setting will disable remote sensor reception of the connected audio component.
- To operate the connected audio component, point the remote control at the remote sensor of this unit.

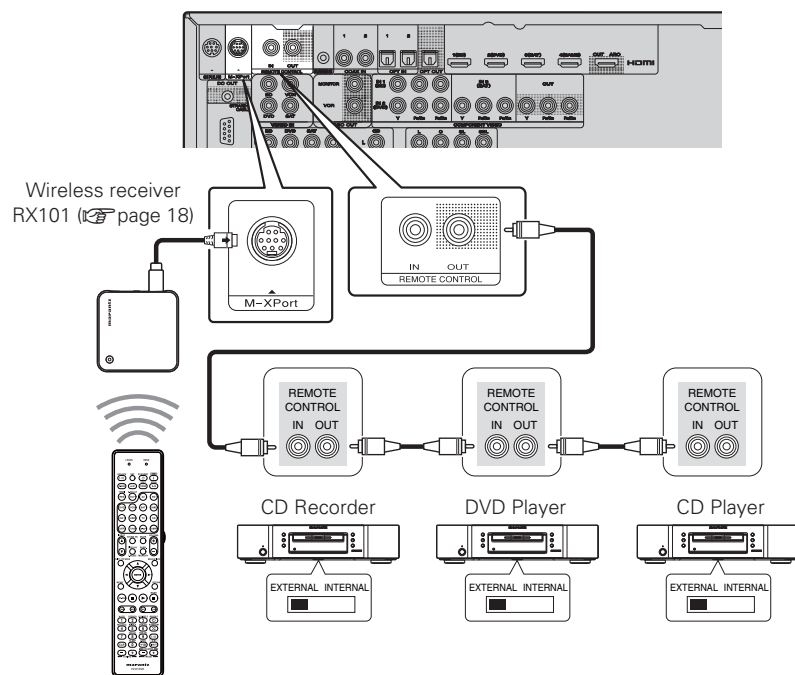


Remote control unit

NOTE

To use wireless receiver RX101 as external IR receiver, set the remote sensor function of this unit to "DISABLE" (page 62 "Remote control settings").

RS-232C connector

By connecting an external serial controller, you can control all sorts of household electrical devices (including lights, electric curtains, and air conditioning units) in addition to your audio and video devices.

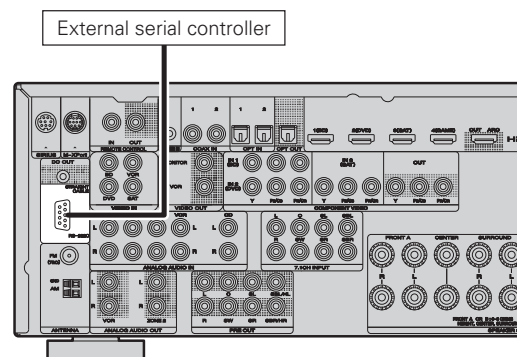


DC OUT (TRIGGER OUT) jacks

When a device with DC IN jack is connected, the connected device's power on/standby can be controlled through linked operation to this unit.

The DC OUT (TRIGGER OUT) jack outputs a maximum 12 V/150 mA electrical signal.

12 V/150 mA trigger-compatible device

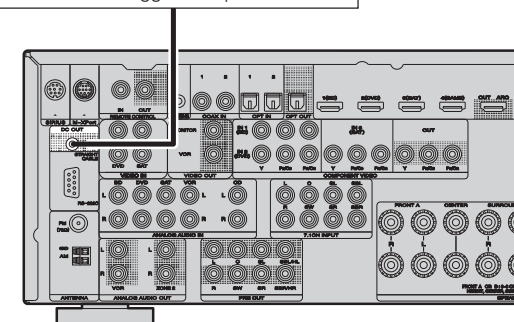

in Set as Necessary

Set to change the conditions for linked operation via the DC OUT (TRIGGER OUT) jack.

"DC Trigger" (page 61)

NOTE

If the permissible trigger input level for the connected device is larger than 12V/150mA, or has shorted, the DC OUT (TRIGGER OUT) jack cannot be used.

In this case, turn off the power to the unit, and disconnect it.

Playback (Advanced operation)

Playback (Basic operation) (👉 page 22)

Selecting a listening mode (Surround mode)
(👉 page 29)

- ❑ **HDMI control function** (👉 page 39)
- ❑ **Sleep timer function** (👉 page 40)
- ❑ **Adjusting the volume of the speakers** (👉 page 40)
- ❑ **Panel lock function** (👉 page 41)

Convenient functions

HDMI control function

When you make an HDMI connection with a TV or player compatible with this unit and HDMI control functions, you can perform the following operations by setting the HDMI control function of each device.

- ❑ **This unit power off can be linked to the TV power off step.**
- ❑ **You can switch audio output devices with a TV operation.**
When you set "Output audio from amp" in the TV audio output setup operation, you can switch the amp power on.
- ❑ **You can adjust this unit volume in the TV volume adjustment operation.**
- ❑ **You can switch this unit input sources through linkage to TV input switching.**
- ❑ **When playing the player, this unit input source switches to the source for that player.**

NOTE

- When "HDMI Control" is set to "ON", it consumes more standby power.
- The HDMI control function controls operations of a TV that is compatible with the HDMI control function. Make sure that the TV and HDMI are connected when you perform HDMI control.
- Some functions may not operate depending on the connected TV or player. Check the owner's manual of each device for details beforehand.
- When "Power Off Control" on the menu is set to "OFF" (👉 page 59), this unit is not set to standby even if the connected device is in the standby mode.
- When connection changes are implemented, such as adding connections to HDMI devices, linked operations may be initialized. In this case, you will need to reconfigure the settings.
- When "HDMI Control" is set to "ON", it is not possible to assign an HDMI connector to "TV" at "Input Assign" (👉 page 48).

1 Enable the HDMI control function of this unit.
Set "HDMI Control" (👉 page 58) to "ON".

2 Turn the power on for all the equipment connected by HDMI cable.

3 Set the HDMI control function for all equipment connected by HDMI cable.

- Please consult the operating instructions for the connected equipment to check the settings.
- Carry out steps 1 and 2 should any of the equipment be unplugged.

4 Switch the television input to the HDMI input connected to this unit.

5 Switch this unit input to the HDMI input source and check if the picture from the player is ok.

6 When you turn the TV's power to standby, check that the power of this unit also goes to standby.



If the HDMI control function does not operate properly, check the following points.

- Is the TV or player compatible with the HDMI control function?
- Is "HDMI Control" (👉 page 58) set to "ON"?
- Is "Power Off Control" (👉 page 59) set to "All" or "Video"?
- Are the HDMI control function settings of all equipment correct?

NOTE

Should any of the operations below be performed, the interlocking function may be reset, in which case, repeat steps 2 and 3.

- "Input Assign" – "HDMI" (👉 page 48) setting has changed.
- There is a change to the connection between the equipment and the HDMI, or an increase in equipment.

Sleep timer function


The power automatically goes into standby once the set time has elapsed.

This is convenient for playing sources while going to sleep.

Press **SLEEP** and display the time you want to set.

The "SLEEP" indicator on the display lights.

- The time switches as shown below each time **SLEEP** is pressed.



To cancel the sleep timer

Press **SLEEP** to set "OFF".

The "SLEEP" indicator on the display turns off.



The sleep timer setting is canceled if this unit's power is set to standby or turned off.


Adjusting the volume of the speakers

You can adjust the channel level either according to the playback sources or to your taste, as described below.

Adjusting the volume of the different speakers

1 Press **AMP** to set the remote control unit to amplifier operation mode.


2 Press **CH LVL**.



3 Use **Δ**/**▽** to select the speaker.
The speaker that can be set switches each time one of the buttons is pressed.

4 Use **◀**/**▶** to adjust the volume.

- In the case of a subwoofer, pressing **◀** when it is at "–12 dB" will change the setting to "OFF".

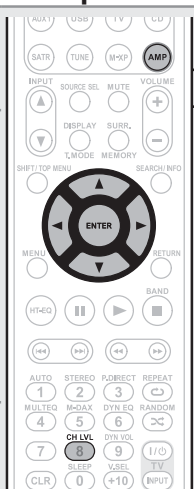


When a headphone jack is inserted, the headphone channel level can be adjusted.

Adjusting the volume of groups of speakers (Fader function)

This function lets you adjust (fade) the sound all at once from the front (front speaker / front height speaker / center speaker) or rear (surround speaker / surround back speaker).


1 Press **AMP** to set the remote control unit to amplifier operation mode.

2 Press **CH LVL**.



3 Use **▽** to select "Fader", then select the item to be adjusting using **◀**/**▶**.

4 Use **◀**/**▶** to adjust the volume of the speakers.
(◀ : front, ▶ : rear)

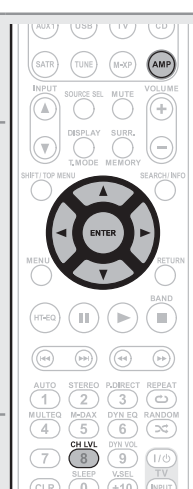


- The fader function does not affect the subwoofer.
- The fader can be adjusted until the volume of the speaker is adjusted to the lowest value of –12 dB.

Convenient functions

Panel lock function

To prevent accidental operation of this unit, you can disable operation of the buttons on the front panel.

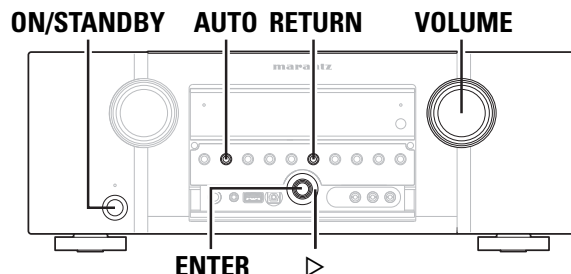

Disabling all key button operations

Press **ON/STANDBY** while you press and hold **AUTO** and **ENTER** with the unit in standby mode.

"Panel Lock:ON" appears on the display and all button operations except **ON/STANDBY** are disabled.

Disabling all button operations except VOLUME

Press **ON/STANDBY** while you press and hold **AUTO** and **▶** with the unit in standby mode.

"Panel Lock:ON" appears on the display and all button operations except **ON/STANDBY** and **VOLUME** are disabled.

Canceling the Panel lock function

Press **ON/STANDBY** while you press and hold **AUTO** and **RETURN** with the unit in standby mode.

The Panel lock function is canceled.



Even when the Panel lock function is set, you can operate the unit using the remote control unit.


Playback in ZONE2 (Separate room)

- You can operate this unit so as to enjoy audio in a room (ZONE2) other than the MAIN ZONE (room where the unit is located).
- You can simultaneously play back the same source in both the MAIN ZONE and ZONE2. You can also play back separate sources in the MAIN ZONE and ZONE2.
- There are two methods to do this, as described below. Choose one of the methods.
 - ZONE2 playback by speaker output
 - ZONE2 playback by audio output (PRE OUT) (using an external amplifier)

1 ZONE2 playback by speaker output

The ZONE2 audio signals are output from this unit's SURR.BACK/AMP ASSIGN speaker terminals using the amplifier assignment function.


Connecting and setting the speakers

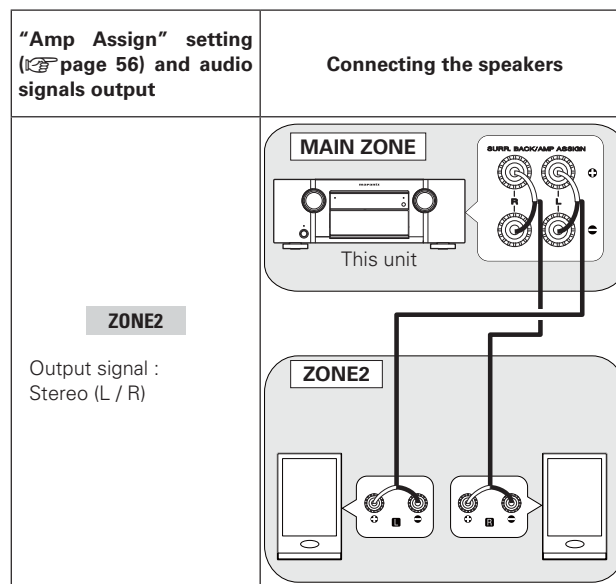

2 ZONE2 playback by audio output

The audio signals connected to this unit's ZONE2 output terminals (ZONE2 OUT) are output to the ZONE2's amplifier and played with that amplifier.

Connection (ZONE2)

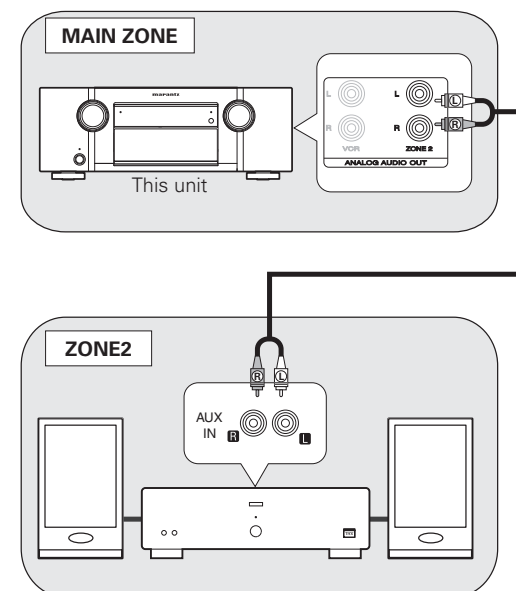

- We recommend using high quality pin-plug cables for audio connections in order to prevent noise.
- Also be sure to read the operating instructions of the connected devices.

NOTE

It is not possible to play the digital audio signals input from the HDMI, COAXIAL or OPTICAL terminals in ZONE2. Play using analog connections (in stereo).

Playback

1 Press **Z2** to switch the remote control operating mode.

The remote control unit switches to the operating mode for ZONE2.

2 Press **ON** to turn on the ZONE2 power.


The **Z2** indicator on the display lights.

- When **STANDBY** is pressed, ZONE2 turns off.
- Power in ZONE2 can be turned on or off by pressing **ZONE2 ON/OFF** on the main unit.

3 Press **INPUT ▲▼**.

The audio signal of the selected source is output to ZONE2.

- Turn **INPUT SELECTOR** after pressing **ZONE SELECT** on the main unit to select an input source.



When power for both MAIN ZONE and ZONE2 is set to ON, power of the MAIN ZONE only can be turned off. Press **STANDBY**.

Adjusting the volume

Use **VOLUME + -** to adjust the volume.

[Adjustable range] --- **-80dB - -40dB - 18dB**

(When the "Volume Display" (page 60) setting is "Relative")

[Adjustable range] **0 - 41 - 99**

(When the "Volume Display" (page 60) setting is "Absolute")

- At time of purchase, "Volume Limit" (page 59) is set to "-10dB (71)".



Turn **MASTER VOLUME** after pressing **ZONE2 SELECT** on the main unit to adjust the sound volume.

Turning off the sound temporarily

Press **MUTE**.


The sound is reduced to the level set at "Mute Level" (page 60) in the menu.

- To cancel, either adjust the volume or press **MUTE** again.
- The setting is canceled when the zone's power is turned off.

How to make detailed settings

Menu map













For menu operation, connect a TV to this unit and display the menu on the TV screen. For menu operations, see the following page.

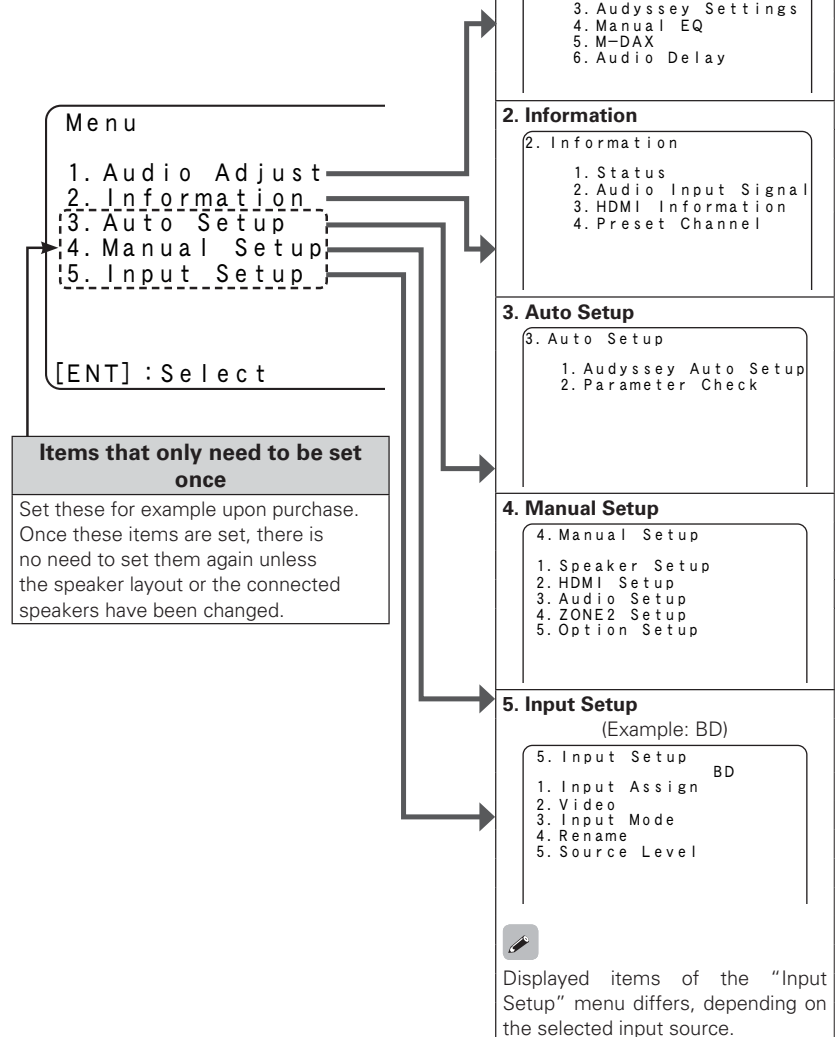

Setting items	Number	Detailed items	Description	Page
1. Audio Adjust	1-1	Surround Parameter	Adjusts surround sound parameters.	52
	1-2	Tone	Adjusts the tonal quality of the sound.	53
	1-3	Audyssey Settings	Makes MultEQ®, Dynamic EQ® and Dynamic Volume® settings.	53
	1-4	Manual EQ	Uses the graphic equalizer to adjust the tone of each speaker.	55
	1-5	M-DAX	Uncompresses compressed sources and apply bass boost for richer sound.	55
	1-6	Audio Delay	Compensates for incorrect timing between video and audio.	55
2. Information	2-1	Status	Shows information about current settings.	61
	2-2	Audio Input Signal	Shows information about audio input signals.	61
	2-3	HDMI Information	Displays the HDMI input/output signals and HDMI monitor information.	61
	2-4	Preset Channel	Shows information about tuner preset channels.	61
3. Auto Setup	3-1	Audyssey Auto Setup	Makes the optimum settings for the speakers being used automatically.	6
	3-2	Parameter Check	Checks Audyssey® Auto Setup measurement results. This item is only displayed after Audyssey Auto Setup procedure has been performed.	10
4. Manual Setup	4-1	Speaker Setup	Sets the speaker size and distance, the channel level, etc.	56
	4-2	HDMI Setup	Makes settings for HDMI video/audio output.	58
	4-3	Audio Setup	Makes settings for audio playback.	59
	4-4	ZONE2 Setup	Makes settings for audio playback in a ZONE2 system.	59
	4-5	Option Setup	Makes various other settings.	60
5. Input Setup (Example: BD)	-	Auto Preset	Uses the auto preset function to program radio stations.	47
	-	Preset Skip	Sets the preset memories that you do not want to display when tuning.	47
	-	Parental Lock	Sets the Parental Lock.	47
	-	Antenna Aiming	Adjusts the SIRIUS reception sensitivity.	47
	-	Preset Name	Assigns name to a preset memory.	48
	-	Input Assign	Changes input connector assignment.	48
	-	Video	Makes the video settings.	49
	-	Input Mode	Sets the audio input mode and decode mode.	50
	-	Rename	Changes the display name for this source.	51
	-	Source Level	Adjusts the playback level of the audio input.	51
	-	Playback Mode	Makes settings for iPod and USB memory device playback.	51

Examples of on-screen display and front display

Below we describe typical examples of displays on the TV screen and on the set's display window.

	On-screen Display	Front Display	Description
Top menu display			<p>① The menu items are displayed here.</p> <p>② The selected line is displayed here.</p> <p>The currently selected item is displayed on the display.</p> <p>Use $\Delta \nabla$ to move to the item you want to set.</p> <p>③ The number of the current selected setting menu is displayed.</p>
Display when changing settings	 <p>Press ENTER.</p> 	 <p>Press ENTER.</p> 	<p>① The number of the current selected setting menu is displayed.</p> <p>② Use $\Delta \nabla \triangleleft \triangleright$ to move to the item you want to set.</p> <p>③ Press ENTER to set to the mode in which the setting can be made.</p> <p>④ $\triangleleft \triangleright$ is displayed at the sides of item whose setting can be changed.</p> <p>Use $\triangleleft \triangleright$ to change to the desired setting.</p>
Display when inputting characters			<p>① When $\triangleleft \triangleright$ is pressed, the cursor moves to the left or right.</p> <p>② When $\Delta \nabla$ is pressed at the position where you want to input the character, the character is input.</p> <p>③ The number of the current selected setting menu is displayed.</p> <p></p> <p>For inputting characters on a keyboard screen or with the number buttons on the remote control unit, see page 45.</p>
Display when resetting		 <p>Press ENTER.</p> 	<p>① Press ∇ to select "Default", then press ENTER to set.</p> <p>② The number of the current selected setting menu is displayed.</p>

Inputting characters

"Preset Name" (page 48) and "Rename" (page 51) can be changed as desired.


For inputting characters, there are three methods, as shown below.

Method for inputting characters

Method	Operations
Using the cursor buttons (normal screen)	<ul style="list-style-type: none"> Operating with the remote control unit or the main unit. Use $\Delta \nabla \triangleleft \triangleright$ and ENTER to input characters.
Using the keyboard screen	<ul style="list-style-type: none"> Operating with the remote control unit. Select a character on the TV screen to input characters.

Normal screen

Display of a normal input screen

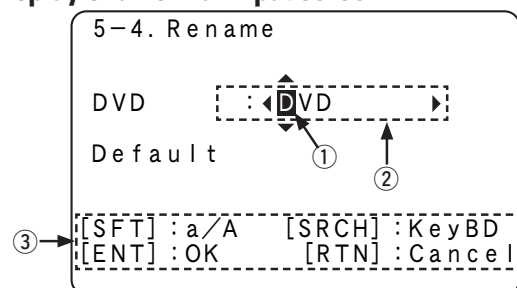

- ① Cursor
- ② Character input section
- ③ Guide for operation buttons
 - **[SFT] SHIFT** Switching upper- and lower-case characters
 - **[SRCH] SEARCH** Switching to the keyboard screen input method
 - **[ENT] ENTER** Registering an input character
 - **[RTN] RETURN** Canceling an input character

Using the cursor buttons

- 1 Display the screen for inputting characters. (page 43 "Menu map")
- 2 Use $\triangleleft \triangleright$ to set the cursor to the character you want to change.
- 3 Use $\Delta \nabla$ to change the character, then press **ENTER**.

- The types of characters that can be input are as shown below.

[Upper case characters]
 ABCDEFGHIJKLMNOPQRSTUVWXYZ
[Lower case characters]
 abcdefghijklmnopqrstuvwxyz
[Symbols] ' () * + - . / : ; < = > ? []
[Numbers] 0 1 2 3 4 5 6 7 8 9 (Space)


- The input character type can be switched by pressing **SHIFT/TOP MENU** while the display name is being changed.

- 4 Repeat steps 2 and 3 to rename then press **ENTER** to register it.



Keyboard screen

Display of a keyboard input screen

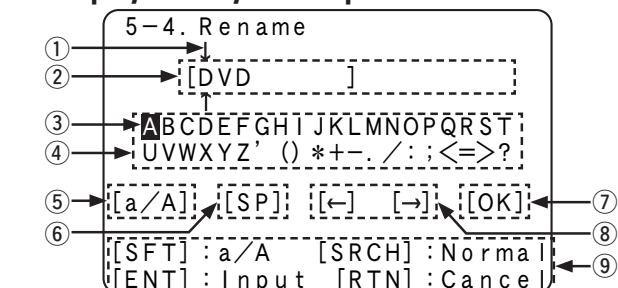

- ① Cursor
- ② Character input section
- ③ Cursor
- ④ Keyboard section
- ⑤ Upper (Symbols)- / lower (Numbers)-case character switching key
- ⑥ Space key
- ⑦ OK key
- ⑧ Cursor keys
- ⑨ Guide for operation buttons
 - **[SFT] SHIFT** Switching upper- and lower-case characters
 - **[SRCH] SEARCH** For switching to the normal screen input method
 - **[ENT] ENTER** For inputting a selected character
 - **[RTN] RETURN** Canceling an input character

Inputting characters

1 Display the screen for inputting characters (page 43 “Menu map”).

2 Press **SEARCH/INFO** while a normal screen is displayed.
A keyboard screen is displayed.

3 Select a character to be changed.

① Press $\triangle \nabla \triangleleft \triangleright$ to select “[←]” or “[→]”.

② Press **ENTER** to place the cursor at the character to be changed.

Each time **ENTER** is pressed, the cursor moves by one character.

4 Select a character to be input with $\triangle \nabla \triangleleft \triangleright$ then press **ENTER**.

• The types of characters that can be input are as shown below.

[Upper case characters/Symbols]


ABCDEFGHIJKLMNOPQRSTUVWXYZ

UVWXYZ ' () * + - . / : ; < = > ?

[Lower case characters/Numbers]

abcdefghijklmnopqrstuvwxyz

0123456789



5 Repeat steps 3 and 4 to rename.

6 Use $\triangle \nabla \triangleleft \triangleright$ to select “[OK]”, then press **ENTER**.

Input Setup

Perform settings related to input source playback.

• You do not have to change the settings to use the unit. Make settings when needed.

Menu operation

1 Press **AMP** to set the remote control unit to amplifier operation mode.

2 Press **MENU**.

The menu is displayed on the TV screen.

3 Press $\triangle \nabla$ to select the menu to be set or operated.

4 Press **ENTER** to enter the setting.

• To return to the previous item, press **RETURN**.

• Exiting the Menu, press **MENU** while the menu is displayed.
The menu display disappears.



Items that can be set with the Input Setup procedure

Auto Preset (page 47)

5-1. Auto Preset
Auto Tuning
Preset Station Memory
Storing Preset Memory
Start
[ENT] : Start [RTN] : Back

Preset Skip (page 47)

5-2. Preset Skip
Block : \triangleleft A \triangleright
A Block Presets : ON
A1 FM 87.50MHz : ON
A2 FM 89.10MHz : ON
A3 FM 98.10MHz : ON
A4 FM 107.90MHz : ON
A5 FM 90.10MHz : ON
A6 FM 90.10MHz : ON
A7 FM 90.10MHz : ON
A8 FM 90.10MHz : ON
[ENT] : Select [RTN] : Back

Parental Lock (page 47)

5-2. Parental Lock
1. Lock Setting
2. Edit Lock Code
[ENT] : Select [RTN] : Back

Antenna Aiming (page 47)

5-3. Antenna Aiming
Satellite : 0
MIN MAX
Terrestrial : 0
MIN MAX

Preset Name (page 48)

5-3. Preset Name
Block : \triangleleft A \triangleright
A1 FM 87.50MHz :
A2 FM 89.10MHz :
A3 FM 98.10MHz :
A4 FM 107.90MHz :
A5 FM 90.10MHz :
A6 FM 90.10MHz :
A7 FM 90.10MHz :
A8 FM 90.10MHz :
[ENT] : Select [RTN] : Back

Input Assign (page 48)

5-1. Input Assign
Default **HDMI** Digi Comp
BD 1 1
DVD 2 C2 1
VCR 3 C1 3
SAT 4 F
GAME
AUX1
[ENT] : Select [RTN] : Back

Video (page 49)

5-2. Video
Video Select : \triangleleft Source \triangleright
Video Mode : Auto
I/p Scaler : OFF
[RTN] : Back

Input Mode (page 50)

5-3. Input Mode
Input Mode : \triangleleft Auto \triangleright
Decode Mode : Auto
[RTN] : Back

Rename (page 51)

5-4. Rename
BD : \triangleleft BD \triangleright
Default
[\triangleleft \triangleright] : Up/Down [\triangleleft \triangleright] : Rename
[RTN] : Back

Source Level (page 51)

5-5. Source Level
Source Level (A) : \triangleleft 0dB \triangleright
Source Level (D) : 0dB
[RTN] : Back

Playback Mode (page 51)

5-4. Playback Mode
Repeat Mode : \triangleleft OFF \triangleright
Shuffle Mode : OFF
[RTN] : Back



Important information

About the display of input sources

In this section, the configurable input sources for each item are shown as follows.


BD DVD VCR SAT GAME AUX1 USB TV CD SIRIUS TUNER M-XPoRT

NOTE

Input sources that have been set to "Delete" at "Source Delete" (page 60) cannot be selected.

Auto Preset


Use the auto preset function to program radio stations.

Setting items	Setting details
Start Start the auto preset process. TUNER	 If an FM station cannot be preset automatically, select the desired station by tuning it in manually, then preset it manually.

Preset Skip

Default settings are underlined.



Set preset ch to be skipped when selecting.

Setting items	Setting details
A – G Set the preset channels you do not want to display. You can set by preset memory block (A to G) or by preset channel (1 to 8). TUNER SIRIUS	1 – 8 : Set by individual preset channels in the currently selected preset memory block. • ON : Display the selected preset channel. • Skip : Do not display the selected preset channel.  If you set "Block Presets" to "Skip", you can skip the preset memory blocks (A to G).

Parental Lock

Default settings are underlined.

For any channel, set the radio reception limits.

Setting items	Setting details
Lock Setting Set the channel radio reception limits. SIRIUS	<ol style="list-style-type: none"> Press $\Delta \nabla$ to select "Lock Setting", and then press \triangleright or ENTER. Pressing $\Delta \nabla \triangleleft \triangleright$, input the password (4 digits number) and press ENTER. Select channel by pressing $\Delta \nabla$, and set the lock by pressing $\triangleleft \triangleright$. Unlock : Do not lock selected channel(s). Lock : Lock selected channel(s). When a Parental Locked channel is tuned, "Enter Lock Code" is displayed, then input the password.  <ul style="list-style-type: none"> The default password is "0000". If the password is wrong, "Lock Code is incorrect" is displayed. Input the correct password. While listening to the channel being played, you can also set parental lock (page 26).
Edit Lock Code Change the password. SIRIUS	<ol style="list-style-type: none"> Press $\Delta \nabla$ to select "Edit Lock Code", and then press \triangleright or ENTER. Input current lock code (4 digits) using $\Delta \nabla \triangleleft \triangleright$, and press ENTER. Input new lock code (4 digits) using $\Delta \nabla \triangleleft \triangleright$, and press ENTER. Input new lock code (4 digits) again using $\Delta \nabla \triangleleft \triangleright$, and press ENTER. Press $\Delta \nabla$ to select "Execute", and then press ENTER. If the correct password is input, "Completed" is displayed, and the new password is modified.  <ul style="list-style-type: none"> If the old password is incorrectly input, "Current Lock Code is incorrect" is displayed, and proceed again from step 1. If the password input is 3 digits or less, "Enter 4 digits number" is displayed, and input again with a 4 digit password. If the new password is not correctly input, "New Lock Codes do not Match" is displayed and the password does not change.

Antenna Aiming

Install the antenna with radio reception sensitivity set to maximum.

Setting items	Setting details	
Satellite Indicate satellite signal strength. SIRIUS	Display	Condition
	3 MIN▶▶▶MAX	Signal strength is excellent
	2 MIN▶▶ MAX	Signal strength is good
	1 MIN▶ MAX	Signal strength is weak
Terrestrial Indicate terrestrial signal strength. SIRIUS	0 MIN MAX	No signal

Remote control operation buttons



Move the cursor (Up/Down/Left/Right)



Confirm the setting



Return to previous menu


Preset Name

Assign a name to a preset memory.

Setting items	Setting details
A1 – G8 Select the preset channel.	<ul style="list-style-type: none"> Up to eight characters can be input. For character input, see page 45.
TUNER	
Default The changed preset name is returned to the default setting.	Yes : Reset to the defaults. No : Do not reset to the defaults.

Input Assign


Examples of input assign menu screen displays

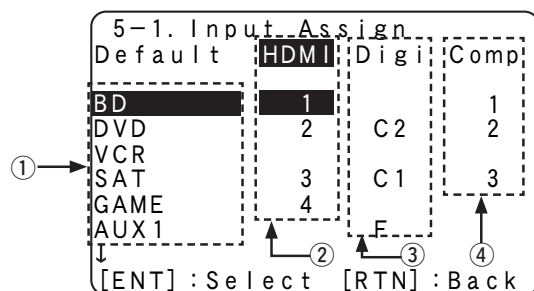

- ① Input Source
- ② HDMI input
- ③ Digital audio input
- ④ Component video input

Input assignments menu operations

- 1 Use $\Delta \nabla \triangleleft \triangleright$ to move the highlight to the item you want to set.
- 2 Press **ENTER**, then use $\triangleleft \triangleright$ to select the input connector to be assigned.
- 3 Press **ENTER** to enter the setting.



NOTE

If all "HDMI", "Digital" and "Component" assignment of the Game source are set to "None", Game source cannot be selected with the input source selection.

Setting items

HDMI

Set this to change the HDMI input connectors assigned to the input sources.

BD

DVD

VCR

SAT

GAME

AUX1

TV

Setting details

HDMI 1 / HDMI 2 / HDMI 3 / HDMI 4

None : Do not assign an HDMI input connector to the selected input source.

At time of purchase, the settings of the different input sources are as shown below.

Input source	BD	DVD	VCR	SAT	GAME	AUX1	TV
Default setting	HDMI 1	HDMI 2	None	HDMI 3	HDMI 4	None	None

An input source to which an HDMI input connector cannot be assigned is displayed as “–”.

To play the video signal assigned at “HDMI” combined with the audio signal assigned at “Input Assign” – “Digital”, select “Digital” at “Input Mode” (page 50).

The audio signals input from the analog and digital connectors are not output to the monitor.

When “HDMI Control” (page 58) is set to “ON”, HDMI input connector cannot be assigned to “TV”.

Digital

Set this to change the digital input connectors assigned to the input sources.

BD

DVD

VCR

SAT

GAME

TV

CD

SIRIUS

C1, C2 (COAXIAL) / O1, O2 (OPTICAL)

None : Do not assign a digital input connector to the selected input source.

At time of purchase, the settings of the different input sources are as shown below.



Input source	BD	DVD	VCR	SAT	GAME
Default setting	None	COAXIAL 2	None	COAXIAL 1	None

Input source	TV	CD	SIRIUS
Default setting	OPTICAL 1	OPTICAL 2	None

NOTE

The OPTICAL input connectors in the front panel accept only digital input signals from AUX1. Input connector assignments cannot be changed.



Setting items	Setting details																									
Component Set this to change the component video input connectors assigned to the input sources. <table><tr><td>BD</td><td>DVD</td><td>VCR</td></tr><tr><td>SAT</td><td>GAME</td><td>AUX1</td></tr><tr><td>TV</td><td></td><td></td></tr></table>	BD	DVD	VCR	SAT	GAME	AUX1	TV			Comp1/Comp2/Comp3 (Component video) None : Do not assign a component video input connector to the selected input source. • At time of purchase, the settings of the different input sources are as shown below. <table><tr><th>Input source</th><td>BD</td><td>DVD</td><td>VCR</td><td>SAT</td><td>GAME</td><td>AUX1</td><td>TV</td></tr><tr><th>Default setting</th><td>Component 1</td><td>Component 2</td><td>None</td><td>Component 3</td><td>None</td><td>None</td><td>None</td></tr></table>  An input source to which an component video input connector cannot be assigned is displayed as “—”.	Input source	BD	DVD	VCR	SAT	GAME	AUX1	TV	Default setting	Component 1	Component 2	None	Component 3	None	None	None
BD	DVD	VCR																								
SAT	GAME	AUX1																								
TV																										
Input source	BD	DVD	VCR	SAT	GAME	AUX1	TV																			
Default setting	Component 1	Component 2	None	Component 3	None	None	None																			
Default The “Input Assign” settings are returned to the default settings.	Yes : Reset to the defaults. No : Do not reset to the defaults.  If you select “Default” and press ENTER , the message “Default Setting?” is displayed. Select “Yes” or “No”, and then press ENTER .																									

Video

Default settings are underlined.



Set the source video.

* “TV” or “GAME” can be set when “HDMI” (page 48) or “Component” (page 49) has been assigned.

Setting items	Setting details
Video Select Video of another input source is played back combined with the playing audio.	Source : Play the picture and sound of the input source. BD / DVD / VCR / SAT / GAME / AUX1 / TV : Select video input source to view. This can be set for individual input sources. <p> “TV” and “GAME” can be selected only when a component video connector is assigned as an input source.</p> <p>NOTE</p> <ul style="list-style-type: none"> It is not possible to select HDMI input signals. Input sources for which “Delete” is selected at “Source Delete” (page 60) cannot be selected. <p> Buttons on the remote control unit can be used for operations. Press V.SEL until the desired picture appears. • To cancel, press V.SEL to select “Source”.</p>

Setting items	Setting details									
Video Mode Make settings for video processing. <table><tr><td>BD</td><td>DVD</td><td>VCR</td></tr><tr><td>SAT</td><td>GAME *</td><td>AUX1</td></tr><tr><td>TV *</td><td></td><td></td></tr></table>	BD	DVD	VCR	SAT	GAME *	AUX1	TV *			Auto : Process video automatically based on the HDMI content information. Movie : Process video normally. Game : Always process video appropriate for game content. <ul style="list-style-type: none">This can be assigned to HDMI terminal in “Input Assign” in the menu.If “Video Mode” is set to “Auto”, the mode is switched according to the input contents.If a source is played in both MAIN ZONE (audio and video) and ZONE2 (audio only) modes in the same room, audio in MAIN ZONE and ZONE2 modes may sound out of synchronization, but this is not malfunction. In this case, setting to “Game” mode may improve audio synchronization.
BD	DVD	VCR								
SAT	GAME *	AUX1								
TV *										
i/p Scaler Convert the input source’s resolution to the resolution set at “Resolution”. <table><tr><td>BD</td><td>DVD</td><td>VCR</td></tr><tr><td>SAT</td><td>GAME *</td><td>AUX1</td></tr><tr><td>TV *</td><td></td><td></td></tr></table>	BD	DVD	VCR	SAT	GAME *	AUX1	TV *			Analog : Use i/p scaler function for analog video signal. Analog & HDMI : Use i/p scaler function for analog and HDMI video signal. HDMI : Use i/p scaler function for HDMI video signal. OFF : Do not use i/p scaler function. <ul style="list-style-type: none">“Analog & HDMI” and “HDMI” can be set for input sources for which an HDMI input connector is assigned.Which items can be set depend on the input source assigned to each input connector.This function is not effective when the input signal is x.v.Color, 3D, sYCC601 color, Adobe RGB color, Adobe YCC601 color or computer resolution.
BD	DVD	VCR								
SAT	GAME *	AUX1								
TV *										
Resolution Set the output resolution. Resolution A : Analog Video Resolution H : HDMI <table><tr><td>BD</td><td>DVD</td><td>VCR</td></tr><tr><td>SAT</td><td>GAME *</td><td>AUX1</td></tr><tr><td>TV *</td><td></td><td></td></tr></table>	BD	DVD	VCR	SAT	GAME *	AUX1	TV *			Auto : The number of pixels the TV connected to the HDMI output connector supports is detected automatically and the appropriate output resolution is set. 480p / 576p / 1080i / 720p / 1080p : Set the output resolution. <ul style="list-style-type: none">This item can be set when “i/p Scaler” is set to anything other than “OFF”.When “i/p Scaler” is set to “Analog & HDMI”, the resolution of both the analog video input signal and HDMI input signal can be set.This can also be set by pressing RES on the remote control unit. Each time RES is pressed, the setting is changed as shown below. <div><div>Auto → 480p/576p → 1080i</div><div>1080p ← 720p ←</div></div>
BD	DVD	VCR								
SAT	GAME *	AUX1								
TV *										








Setting items	Setting details									
Progressive Mode Set an appropriate progressive conversion mode for the source video signal. <table><tr><td>BD</td><td>DVD</td><td>VCR</td></tr><tr><td>SAT</td><td>GAME *</td><td>AUX1</td></tr><tr><td>TV *</td><td></td><td></td></tr></table>	BD	DVD	VCR	SAT	GAME *	AUX1	TV *			Auto : The video signal is automatically detected and the appropriate mode is set. Video1 : Select mode suitable for video playback Video2 : Select mode suitable for video and 30-frame film material playback.  This item can be set when “i/p Scaler” is set to anything other than “OFF”.
BD	DVD	VCR								
SAT	GAME *	AUX1								
TV *										
Aspect Set the aspect ratio for the video signals output to the HDMI. <table><tr><td>BD</td><td>DVD</td><td>VCR</td></tr><tr><td>SAT</td><td>GAME *</td><td>AUX1</td></tr><tr><td>TV *</td><td></td><td></td></tr></table>	BD	DVD	VCR	SAT	GAME *	AUX1	TV *			Full : Output at 16:9 aspect ratio. Normal : Output at 4:3 aspect ratio.  “Aspect” can be set when “i/p Scaler” is set to anything other than “OFF”.
BD	DVD	VCR								
SAT	GAME *	AUX1								
TV *										

Input Mode

Default settings are underlined.

The input modes available for selection may vary depending on the input source.

Setting items	Setting details
Input Mode Set the audio input modes for the different input sources.	Auto : Automatically detect input signal and perform playback. HDMI : Play only signals from HDMI input. Digital : Play only signals from digital input. Analog : Play only signals from analog input. 7.1CH INPUT : Only signals input from the 7.1CH INPUT terminal will be played back.  <ul style="list-style-type: none">“HDMI” can be set for input sources for which “HDMI” is assigned at “Input Assign” (page 48).“Digital” can be set for input sources for which “Digital” is assigned at “Input Assign” (page 48).If the input source is set to “TV” or “Game”, it cannot be set to “Analog”.When digital signals are properly input, the DIG. indicator lights on the display. If the DIG. indicator does not light, check the digital input connector assignment and the connections.If “HDMI Control” is set to “ON” and a TV compatible with the ARC is connected via the HDMI MONITOR connectors, the input mode whose input source is “TV” is fixed to ARC.  This can also be set by pressing A/D on the remote control unit. Each time A/D is pressed, the setting is changed as shown below. <div></div> <div><div>Auto → HDMI → Digital → Analog</div><div>7.1CH INPUT ←</div></div>
Decode Mode Set the decode mode for input source.	Auto : Detect type of digital input signal and decode and play automatically. PCM : Decode and play only PCM input signals. DTS : Decode and play only DTS input signals.  <ul style="list-style-type: none">This item can be set for input sources for which “HDMI” or “Digital” is assigned at “Input Assign” (page 48).Normally set this mode to “Auto”. Set “PCM” and “DTS” when inputting the corresponding input signal.This can also be set by pressing D.MODE on the remote control unit. 

Input Setup

Rename

Change the display name of the selected input source.

Setting items	Setting details
Rename Change the display name of the selected input source.	<ul style="list-style-type: none"> Up to eight characters can be input. For character input, see page 45.
Default The input source name is returned to the default setting.	Yes : Reset to the defaults. No : Do not reset to the defaults.


Source Level

Default settings are underlined.

- This function corrects the playback level of the selected input source's audio input.
- Make this setting if there are differences in the input volume levels between the different sources.

Setting details

-12dB – +12dB (0dB)

 The analog input level and digital input level can be adjusted independently for input sources for which "HDMI" or "Digital" is assigned at "Input Assign" (page 48).

Playback Mode

Setting items	Setting details
Repeat Make settings for repeat mode. <div>USB</div>	<input type="checkbox"/> For iPod playback All : All files are played repeatedly. One : A file being played is played repeatedly. OFF : Repeat playback mode is canceled. <input type="checkbox"/> For USB memory device playback All : All files are played repeatedly. One : A file being played is played repeatedly. Folder : A file in the folder being played is played repeatedly.
Shuffle Make settings for shuffle mode. <div>USB</div>	<input type="checkbox"/> For iPod playback Songs : Shuffle songs. Albums : Shuffle albums. OFF : Shuffle playback mode is canceled. <input type="checkbox"/> For USB memory device playback ON : Shuffle playback mode is enabled. OFF : Shuffle playback mode is canceled.

Remote control operation
buttons



Move the cursor
(Up/Down/Left/Right)



Confirm the setting



Return to previous menu

Audio Adjust

The sound being played in the surround mode can be adjusted to your liking.

The items (parameters) that can be adjusted depend on the signal being input and the currently set surround mode. For details on the adjustable parameters, see "Surround modes and surround parameters" (page 74).

Menu operation

1 Press **AMP** to set the remote control unit to amplifier operation mode.

2 Press **MENU**.
The menu is displayed on the TV screen.

3 Press Δ ∇ to select the menu to be set or operated.

4 Press **ENTER** to enter the setting.

- To return to the previous item, press **RETURN**.
- Exiting the Menu, press **MENU** while the menu is displayed.
The menu display disappears.



Items that can be set with the Audio Adjust procedure

Surround Parameter (page 52)

Tone (page 53)

Audyssey Settings (page 53)

Manual EQ (page 55)

M-DAX (page 55)

Audio Delay (page 55)

Surround Parameter

Default settings are underlined.

Adjust surround sound parameters. It may not be possible to set this item depending on the input signal.

Setting items	Setting details
HT-EQ Soften the treble range of movie soundtracks for better understanding.	ON : "HT-EQ" is used. OFF : "HT-EQ" is not used. This can also be set by pressing HT-EQ on the remote control unit.
D.Comp Compress dynamic range (difference between loud and soft sounds).	Low / Mid / High : These set the compression level. OFF : Turn dynamic range compression off.
DRC Compress dynamic range (difference between loud and soft sounds).	Auto : Automatic dynamic range compression on/off control according to the source. This can be set in the Dolby TrueHD mode. Low / Mid / High : These set the compression level. OFF : Dynamic range compression is always off.
LFE Adjust the low-frequency effects level (LFE).	-10dB - 0dB For proper playback of the different sources, we recommend setting to the values below. <ul style="list-style-type: none"> • Dolby Digital sources : "0dB" • DTS movie sources : "0dB" • DTS music sources : "-10dB"
Center Image Assign center channel signal to front left and right channels for wider sound.	0.0 - 1.0 (0.3)
Panorama Assign front L/R signal also to surround channels for wider sound.	ON : Set. OFF : Do not set.
Dimension Shift sound image center to front or rear to adjust playback balance.	0 - 6 (3)
Center Width Assign center channel signal to front left and right channels for wider sound.	0 - 7 (3)






Setting items	Setting details
Height Gain Control the front height channel volume.	Low : Reduce the front height channel volume. Mid : Front height channel sound is output with standard sound volume. High : Increase the front height channel volume. NOTE "Height Gain" is displayed for the following settings. • When "Amp Assign" (page 56) is set to "Normal". • When the "Speaker Config." – "Front Height" setting (page 57) is set to other than "None". • When surround mode is "PLIIz" or the PLIIz decoder is used.
Default The "Surround Parameter" settings are returned to the default settings.	Yes : Reset to the defaults. No : Do not reset to the defaults.

Tone

Default settings are underlined.

Adjust the tonal quality of the sound.

Setting items	Setting details
Tone Control Set the tone control function to ON and OFF.	ON : Allow tone adjustment (bass, treble). OFF : Playback without tone adjustment.  "Tone Control" can be set when "Dynamic EQ" (page 54) is set to "OFF". NOTE The tone cannot be adjusted in the direct mode.
Bass Adjust low frequency range (bass).	-6dB – +6dB (0dB)  "Bass" can be set when "Tone Control" is set to "ON".
Treble Adjust high frequency range (treble).	-6dB – +6dB (0dB)  "Treble" can be set when "Tone Control" is set to "ON".





Audyssey Settings

Default settings are underlined.

Set MultEQ®, Dynamic EQ® and Dynamic Volume®. These can be selected after Audyssey® Auto Setup has been performed. For additional information on Audyssey technology, please see page 78.

NOTE

If you have not performed Auto Setup, or if you change the speaker settings after performing Auto Setup, you may not be able to select Dynamic EQ/Dynamic Volume, and "Run Audyssey" may be displayed. In this case, either perform Audyssey Auto Setup over again or perform "Restore" (page 10) to return to the settings after Audyssey Auto Setup was run.

Setting items	Setting details
MultEQ Select one equalizer from three modes. MultEQ corrects both time and frequency response problems in the listening area based on Audyssey Auto Setup calibration. We recommend "Audyssey". MultEQ is the prerequisite function for Dynamic EQ and Dynamic Volume.	Audyssey : Optimize the frequency response of all speakers. Audyssey Byp.L/R : Optimize frequency response of speakers except front L and R speakers. Audyssey Flat : Optimize frequency response of all speakers to flat response. Manual : Apply frequency response set with "Manual EQ" (page 55). OFF : Turn "MultEQ" equalizer off.  • "Audyssey", "Audyssey Byp. L/R" and "Audyssey Flat" can be selected after Audyssey Auto Setup has been performed. "Audyssey" is automatically selected after performing Audyssey Auto Setup. When "Audyssey", "Audyssey Byp. L/R" or "Audyssey Flat" is selected,  illuminates. • After running Audyssey Auto Setup, if the Speaker Configuration, Distance, Channel Level, and Crossover Freq. have changed without increasing the number of speakers measured, only  illuminates. • Press MULTEQ on the remote control unit to set this setting. 
	NOTE • "MultEQ" and "Manual" cannot be selected when "EQ Customize" is set to "Not Used" (page 59). • When using headphones, "MultEQ" is automatically set to "OFF".

Remote control operation
buttons






Move the cursor
(Up/Down/Left/Right)





Confirm the setting



Return to previous menu

Setting items	Setting details
Dynamic EQ® Solve the problem of deteriorating sound quality as volume is decreased by taking into account human perception and room acoustics. Works with MultEQ.	<p>ON : Use Dynamic EQ. OFF : Do not use Dynamic EQ.</p> <p> AUDYSSEY MULTIEQ DYN EQ is displayed when set to "ON".</p> <ul style="list-style-type: none"> This can also be set by pressing DYN EQ on the remote control unit. <p>Each time DYN EQ is pressed, the setting is changed as shown below.</p> <p>Dynamic EQ : ON ↔ Dynamic EQ : OFF</p> 
Reference Level Offset Audyssey Dynamic EQ is referenced to the standard film mix level. It makes adjustments to maintain the reference response and surround envelopment when the volume is turned down from 0 dB. However, film reference level is not always used in music or other non-film content. Dynamic EQ Reference Level Offset provides three offsets from the film level reference (5 dB, 10 dB, and 15 dB) that can be selected when the mix level of the content is not within the standard.	<p>0dB (Film Ref) : This is the default setting and should be used when listening to movies.</p> <p>5dB : Select this setting for content that has a very wide dynamic range, such as classical music.</p> <p>10dB : Select this setting for jazz or other music that has a wider dynamic range. This setting should also be selected for TV content as that is usually mixed at 10 dB below film reference.</p> <p>15dB : Select this setting for pop/rock music or other program material that is mixed at very high listening levels and has a compressed dynamic range.</p> <p> Setting is enabled when "Dynamic EQ" is "ON" (page 54).</p>

Setting items	Setting details
Dynamic Volume® Solve the problem of large variations in volume level between TV, movies and other content (between quiet passages and loud passages, etc.) by automatically adjusting to the user's preferred volume setting.	<p>Heavy : Most adjustment to softest and loudest sounds. Medium : Medium adjustment to loudest and softest sound. Light : Least adjustment to loudest and softest sounds. OFF : Do not use the "Dynamic Volume".</p> <p> AUDYSSEY MULTIEQ DYN VOL is displayed when set to "ON".</p> <ul style="list-style-type: none"> If "Dynamic Volume" is set to "Yes" in Auto Setup (page 9), the setting is automatically changed to "Heavy". This can also be set by pressing DYN VOL on the remote control unit. <p>Each time DYN VOL is pressed, the setting is changed as shown below.</p> <p>Dynamic Volume : OFF → Dynamic Volume : Heavy Dynamic Volume : Light ← Dynamic Volume : Medium</p> 

Manual EQ

Default settings are underlined.

Use the graphic equalizer to adjust the tone of each speaker.
 "Manual EQ" can be set when "MultEQ®" setting (page 53) is "Manual".

Setting items	Setting details
Adjust CH Correct the tone of each speaker.	① Select the speaker tone adjustment method. All CH : Adjust the tone of all speakers together. L/R CH : Adjust the tone of left and right speakers together. Each CH : Adjust the tone of each speaker. ② Select the speaker. ③ Select the adjustment frequency band. 63Hz / 125Hz / 250Hz / 500Hz / 1kHz / 2kHz / 4kHz / 8kHz / 16kHz • Select the speakers you want to adjust when "L/R" or "Each" is selected. ④ Adjust the level. -20.0dB – +6.0dB (0.0dB)
Base Curve Copy Copy "Audyssey Flat" curve from MultEQ.	Yes : Copy. No : Do not copy. "Base Curve Copy" is displayed after Audyssey Auto Setup has been performed.
Default The "Manual EQ" settings are returned to the default settings.	Yes : Reset to the defaults. No : Do not reset to the defaults.

M-DAX

Default settings are underlined.

Compressed audio formats such as MP3, WAV, WMA (Windows Media Audio) and MPEG-4 AAC reduce the amount of data by eliminating signal components that are hard for the human ear to hear. The M-DAX function generates the signals eliminated upon compression, restoring the sound to conditions near those of the original sound before compression. It also corrects the sense of volume of the bass to obtain richer sound with compressed audio signals.

Setting details

OFF : Do not use M-DAX.

Low : Optimized mode for compressed sources with normal highs.

Mid : Apply suitable bass and treble boost for all compressed sources.

High : Optimized mode for compressed sources with very weak highs.




• This item can be set with analog signals or when a PCM signal (fs = 44.1/48 kHz) is input.

• This cannot be set when the surround mode is set to "DIRECT" or "PURE DIRECT".

• When set to "OFF", the M-DAX indicator on the front panel switches off.

• This can also be set by pressing **M-DAX** on the remote control unit.
 Each time **M-DAX** is pressed, the setting is changed as shown below.



Audio Delay

Default settings are underlined.

While viewing video, manually adjust the time to delay audio output.

Setting details

0ms – 200ms



• This item can be set within the range of 0 to 200 ms when "Auto Lip Sync" is set to "ON" and when a TV compatible with Auto Lip Sync is connected.

• Store "Audio Delay" for each input source.

• Audio Delay for game mode can be set when "Video Mode" (page 49) is set to "Game".

• You can also adjust the time to delay audio output after pressing **DLY** followed by the **<D>** on the remote control, instead of using the menu operation.



Remote control operation buttons



Move the cursor
 (Up/Down/Left/Right)



Confirm the setting



Return to previous menu

Manual Setup

Set when changing Audyssey® Auto Setup settings, or when changing the audio, video, display or other settings.

- If you change the speaker settings after performing Audyssey Auto Setup, it will not be possible to set MultEQ®, Dynamic EQ® and Dynamic Volume® (page 53, 54).
- Can be used without changing the settings. Please set if necessary.

Menu operation

1 Press **AMP** to set the remote control unit to amplifier operation mode.

2 Press **MENU**.
The menu is displayed on the TV screen.

3 Press Δ ∇ to select the menu to be set or operated.

4 Press **ENTER** to enter the setting.

- To return to the previous item, press **RETURN**.
- Exiting the Menu, press **MENU** while the menu is displayed.
The menu display disappears.



Items that can be set with the Manual Setup procedure

Speaker Setup (page 56)

4-1. Speaker Setup

1. Amp Assign
2. Speaker Config.
3. Bass Setting
4. Distance
5. Channel Level
6. Crossover Freq.
7. Front Sp Setup

[ENT] : Select [RTN] : Back

HDMI Setup (page 58)

4-2. HDMI Setup

Auto Lipsync : ON
HDMI Audio Out : Amp
HDMI Control : OFF

[RTN] : Back

Audio Setup (page 59)

4-3. Audio Setup

1. EQ Customize

[ENT] : Select [RTN] : Back

ZONE2 Setup (page 59)

4-4. ZONE2 Setup

Bass : 0dB
Treble : 0dB
HPF : OFF
Level Lch : 0dB
Level Rch : 0dB
Channel : Stereo

↓

[RTN] : Back

Option Setup (page 60)

4-5. Option Setup

1. Volume Control
2. Source Delete
3. On-Screen Display
4. Zone Rename
5. DC Trigger
6. Display
7. Setup Lock

[ENT] : Select [RTN] : Back

Speaker Setup




Default settings are underlined.









Perform when setting the speakers manually or when changing settings made in Audyssey Auto Setup.

- If you change the speaker settings after performing Audyssey Auto Setup, it will not be possible to select MultEQ, Dynamic EQ and Dynamic Volume (page 53, 54).
- Manual Setup can be used without changing the settings. Please set if necessary.

Setting items	Setting details
Amp Assign Set the speakers connected to this unit.	Normal : Set when using 7.1-channel (Front/Center/Surround/Surround Back or Front Height/Subwoofer) speakers. ZONE2 : Set for connecting the speakers for ZONE2 to the SURR. BACK/AMP ASSIGN terminals. SPKR-C : Set for connecting a tweeter of a front speaker to the SURR. BACK/AMP ASSIGN terminals and a woofer of the front speaker to the FRONT A terminals.
Speaker Config. Select speaker configuration and size (bass reproduction capability).	Front : Set the front speaker size. <ul style="list-style-type: none"> • Large : Use a large speaker that can adequately play back low frequencies. • Small : Use a small speaker that has inadequate playback capacity for low frequencies. <p>NOTE</p> <p>Do not use the outward shape of the speaker to determine selection of a "Large" or "Small" speaker. Instead, use the frequencies set in "Crossover Freq." (page 58) as the standard for determining bass reproduction capability.</p> <p>• When "Subwoofer" is set to "No", "Front" is automatically set to "Large".</p> <p>• When "Front" is set to "Small", "Center", "Surround", "Surround Back" and "Front Height" can not be set to "Large".</p> <p>Center : Set the presence and size of the center speaker.</p> <ul style="list-style-type: none"> • Large : Use a large speaker that can adequately play back low frequencies. • Small : Use a small speaker that has inadequate playback capacity for low frequencies. • None : Select when a center speaker is not connected. <p>• "Large" is not displayed when "Front" is set to "Small".</p> <p>Subwoofer : Set the presence of a subwoofer.</p> <ul style="list-style-type: none"> • Yes : Use a subwoofer. • No : Select when a subwoofer is not connected. <p>• When "Front" is set to "Small", "Subwoofer" is automatically set to "Yes".</p>



Setting items	Setting details
Speaker Config. (Continued)	<p>Surround : Set the presence and size of the surround speakers.</p> <ul style="list-style-type: none"> • Large : Use a large speaker that can adequately play back low frequencies. • Small : Use a small speaker that has inadequate playback capacity for low frequencies. • None : Select when the surround speakers are not connected. <p></p> <ul style="list-style-type: none"> • When "Surround" is set to "Large", "Surround Back" and "Front Height" can be set to "Large". • When "Surround" is set to "None", "Surround Back" and "Front Height" can automatically set to "None". <p>S.Back : Set the presence, size and number of surround back speakers.</p> <ul style="list-style-type: none"> • Large : Use a large speaker that can adequately play back low frequencies. • Small : Use a small speaker that has inadequate playback capacity for low frequencies. • None : Select when the surround back speakers are not connected. <ul style="list-style-type: none"> • 2sp : Use two surround back speakers. • 1sp : Use only one surround back speaker. When you select this setting, connect the surround back speaker to the left (L) channel. <p>NOTE</p> <p>When the "Amp Assign" setting ( page 56) is other than "Normal", you cannot make the "S.Back" setting.</p> <p>Front Height : Set the presence and size of the front height speakers.</p> <ul style="list-style-type: none"> • Large : Use a large speaker that can adequately play back low frequencies. • Small : Use a small speaker that has inadequate playback capacity for low frequencies. • None : Select when the front height speakers are not connected. <p>NOTE</p> <p>When the "Amp Assign" setting ( page 56) is other than "Normal", you cannot make the "Front Height" setting.</p>

Setting items	Setting details
Bass Setting Set subwoofer and LFE signal range playback.	<p>Subwoofer Mode : Select low range signals to be reproduced by subwoofer.</p> <ul style="list-style-type: none"> • LFE : The low range signal of the channel set to "Small" speaker size is added to the LFE signal output from the subwoofer. • LFE+Main : The low range signal of all channels is added to the LFE signal output from the subwoofer. <p></p> <ul style="list-style-type: none"> • "Subwoofer Mode" can be set when "Speaker Config." – "Subwoofer" ( page 56) is set to "Yes". • Play music or a movie source and select the mode offering the strongest bass. • Select "LFE+Main" if you want the bass signals to always be produced from the subwoofer. <p>NOTE</p> <p>If "Front" and "Center" for "Speaker Config." are set to "Large", and "Subwoofer Mode" is set to "LFE", no sound may be output from the subwoofers, depending on the input signal or selected surround mode.</p> <p>LPF for LFE : Set LFE signal playback range.</p> <p>• 80Hz / 90Hz / 100Hz / 110Hz / 120Hz / 150Hz / 200Hz / 250Hz</p>
Distance Set distance from listening position to speakers. Measure beforehand the distance from the listening position to each speaker.	<p>Unit : Set the unit of distance.</p> <p>• Feet / Meters</p> <p>Step : Set the minimum variable width of the distance.</p> <p>• 1ft / 0.1ft</p> <p>• 0.1m / 0.01m</p> <p>FL / FR / C / SW / SL / SR / SBL* / SBR* / FHL / FHR : Select the speaker.</p> <p>* When the "Speaker Config." – "S.Back" setting ( page 57) is set to "1sp", "S.Back" is displayed.</p> <p>• 0.0ft – 60.0ft / 0.00m – 18.00m : Set the distance.</p> <p></p> <ul style="list-style-type: none"> • The speakers that can be selected differ depending on the "Amp Assign" ( page 56) and "Speaker Config." ( page 56) settings. • Default settings : FL / FR / C / SW / FHL / FHR : 12.0 ft (3.6 m) SL / SR / SBL / SBR : 10.0 ft (3.0 m) • Set the difference in the distance between the speakers to less than 20 ft (6.0 m). <p>NOTE</p> <p>Speakers set to "None" in "Speaker Config." ( page 56) are not displayed.</p> <p>Default : The "Distance" settings are returned to the default settings.</p> <ul style="list-style-type: none"> • Yes : Reset to the defaults. • No : Do not reset to the defaults. <p> When you select "Default" and press ENTER, the "Default Setting?" prompt is displayed. Select either "Yes" or "No", and press ENTER.</p>

Setting items	Setting details
Channel Level Set the volume of the test tone to be the same when it is output from each speaker.	<p>Test Tone Start : Output test tone.</p> <ul style="list-style-type: none"> • FL / C / FR / SR / SBR* / SBL* / SL / FHL / FHR / SW : Select the speaker. * When the "Speaker Config." – "S.Back" setting (page 57) is set to "1sp", "S.Back" is displayed. • –12.0dB – +12.0dB (0.0dB) : Adjust the volume. <p> When < is pressed while the subwoofer volume is set to "–12 dB", the "Subwoofer" setting switches to "OFF".</p> <p>When "Channel Level" is adjusted, the adjusted values are set for all the surround modes. To adjust the channel level separately for the different surround modes, use the operation see page 40.</p> <p>When you press TEST TONE on the remote control, you can enter this setting item immediately.</p> <p>NOTE</p> <ul style="list-style-type: none"> • Speakers set to "None" in the "Speaker Config." (page 56) settings are not displayed. • When a headphones jack is inserted in the PHONES jack of this unit, the "Channel Level" is not displayed. <p>Default : The "Channel Level" settings are returned to the default settings.</p> <ul style="list-style-type: none"> • Yes : Reset to the defaults. • No : Do not reset to the defaults.
Crossover Freq. Set the maximum frequency of the bass signal output from each channel to the subwoofer. Set the Crossover Freq. to suit the bass reproduction capability of the speaker being used.	<p>Crossover : Set the crossover frequency.</p> <ul style="list-style-type: none"> • 40Hz / 60Hz / 80Hz / 90Hz / 100Hz / 110Hz / 120Hz / 150Hz / 200Hz / 250Hz <p>Advanced : Specify crossover frequency for each speaker.</p> <ul style="list-style-type: none"> • Front / Center / Surround / S.Back / Front Height : Select the speaker. • 40Hz / 60Hz / 80Hz / 90Hz / 100Hz / 110Hz / 120Hz / 150Hz / 200Hz / 250Hz : Set the crossover frequency. <p></p> <ul style="list-style-type: none"> • "Crossover Freq." can be set when the "Bass Setting" – "Subwoofer Mode" (page 57) setting is "LFE+Main", or when you have a speaker that is set to "Small". • Always set the crossover frequency to "80Hz". When using small speakers, however, we recommend setting the crossover frequency to a higher frequency. • For speakers set to "Small", sound below the crossover frequency is cut from the sound output. The cut bass sound is output from the subwoofer or front speakers. • The speakers that can be set when "Advanced" is selected differ depending on the "Subwoofer Mode" setting (page 57). • When "LFE" is selected, speakers set to "Small" at "Speaker Config." can be set. If the speakers are set to "Large", "Full Band" is displayed and the setting cannot be made. • If set to "LFE+Main", this setting can be made regardless of the speaker size.



Setting items	Setting details
Front Speaker Setup Set the front speakers to use for every surround mode.	<ul style="list-style-type: none"> • A : Front speaker A is used. • B : Front speaker B is used. • A+B : Both front speakers A and B are used. <p> You can switch speakers by pressing SPKR A/B on the remote control.</p>



HDMI Setup

Default settings are underlined.

Make settings for HDMI video/audio output.

Setting items	Setting details
Auto Lip Sync Make automatic compensation for timing shift in audio and video output.	<p>ON : Compensated.</p> <p>OFF : Not compensated.</p>
HDMI Audio Out Select HDMI audio output device.	<p>Amp : Play back through speakers connected to the receiver.</p> <p>TV : Play back through TV connected to the receiver.</p> <p> When the HDMI control function is activated, priority is given to the TV audio setting (page 39 "HDMI control function").</p>
HDMI Control You can link operations with devices connected to HDMI and compatible with HDMI Control.	<p>ON : Use HDMI control function.</p> <p>OFF : Do not use HDMI control function.</p> <p></p> <ul style="list-style-type: none"> • When a device that is not compatible with the HDMI control function is connected, set "HDMI Control" to "OFF". • Please consult the operating instructions for each connected component to check the settings. • Refer to "HDMI control function" (page 39) for more information about the HDMI control function. <p>NOTE</p> <ul style="list-style-type: none"> • When "HDMI Control" is set to "ON", it consumes more standby power. If you are not using this unit for an extended period, it is recommended that you unplug the power cord from the power outlet. • "HDMI Control" does not work when the power to the equipment is off. Either turn power on or set to standby. • The HDMI control function controls operations of a TV that is compatible with the HDMI control function. Make sure that the TV and HDMI are connected when you perform HDMI control. • If the "HDMI Control" settings have been changed, always reset the power to connected devices after the change.

Setting items	Setting details
Standby Source Sets the HDMI input source to put into standby when the power is on.	Last : This item is set at the last-used input source. HDMI1 / HDMI2 / HDMI3 / HDMI4 : Put the respective input source into standby. "Standby Source" can be set when "HDMI Control" is set to "ON".
Power Off Control Links the power standby of this unit to external equipment.	All : If power to a connected TV is turned off independently of the input source, power to this unit is automatically set to standby. Video : If power to a connected TV is turned off when the input source is BD / DVD / VCR / SAT / GAME / AUX1 / TV, power to this unit is automatically set to standby. OFF : This unit does not link with power to a TV. "Power Off Control" can be set when "HDMI Control" is set to "ON".

Audio Setup

Default settings are underlined.

Make settings for audio playback.

Setting items	Setting details
EQ Customize Set so that unused equalizer settings are not displayed when MULTEQ is pressed.	Audyssey Byp. L/R : Set when not using "Audyssey Byp. L/R" equalizer. • Used : Use. • Not Used : Do not use. Set so that "Audyssey Byp. L/R" settings can be made when Audyssey Auto Setup is performed. Audyssey Flat : Set when not using "Audyssey Flat" equalizer. • Used : Use. • Not Used : Do not use. Set so that "Audyssey Flat" settings can be made when Audyssey Auto Setup is performed. Manual : Set when not using the "Manual" equalizer. • Used : Use. • Not Used : Do not use.



ZONE2 Setup

Default settings are underlined.

Set the audio to play back with ZONE2.

Setting items	Setting details
Bass Adjust low frequency range (bass).	-10dB – +10dB (0dB)
Treble Adjust high frequency range (treble).	-10dB – +10dB (0dB)
HPF Make settings for cutting the low range to reduce distortion in the bass.	ON : The low range is attenuated. OFF : The low range is not attenuated.
Level Lch Adjust the left channel output level.	-12dB – +12dB (0dB) The "Level Lch" can be set when "Channel" (page 59) is set to "Stereo".
Level Rch Adjust the right channel output level.	-12dB – +12dB (0dB) The "Level Rch" can be set when "Channel" (page 59) is set to "Stereo".
Channel Set the signal output from ZONE2.	Stereo : Select stereo output. Mono : Select mono output.
Volume Level Set the volume output level.	Variable : Volume adjustment is enabled by main unit and remote control unit. -40dB (41) : Fix volume at -40 dB. Set when adjusting volume by external amplifier. 0dB (81) : Fix volume at 0 dB. Set when adjusting volume by external amplifier. When "Amp Assign" (page 56) is set to "ZONE2", the "Volume Level" setting is automatically set to "Variable".
Volume Limit Make a setting for maximum volume.	OFF : Do not set a maximum volume. -20dB (61) / -10dB (71) / 0dB (81) • This can be set when the ZONE2 "Volume Level" setting (page 59) is "Variable". • This is displayed from 0 to 99 when "Volume Display" (page 60) is set to "Absolute".

Remote control operation
buttons




Move the cursor
(Up/Down/Left/Right)



Confirm the setting




Return to previous menu


Setting items	Setting details
Power On Level Define the volume setting that is active when the power is turned on.	Last : Use the memorized setting from the last session. --- (0) : Always mute when power is turned on. -80dB - 18dB (1 - 99) : The volume is adjusted to the set level.  <ul style="list-style-type: none"> This can be set when the ZONE2 "Volume Level" setting (page 59) is "Variable". This is displayed from 0 to 99 when "Volume Display" (page 60) is set to "Absolute".
Mute Level Set the amount of attenuation when muting is on.	Full : The sound is muted entirely. -40dB : The sound is attenuated by 40 dB down. -20dB : The sound is attenuated by 20 dB down.

Option Setup

Default settings are underlined.


Make various other settings.

Setting items	Setting details
Volume Control Set the volume setting.	Volume Display : Set how volume is displayed. <ul style="list-style-type: none"> Relative : Display -- dB (Min), in the range -80.5 dB - 18 dB. Absolute : Display in the range 0 (Min) - 99.  The "Volume Display" setting is applied also to the "Volume Limit" and "Power On Level" display method. Volume Limit : Make a setting for maximum volume. <ul style="list-style-type: none"> OFF : Do not set a maximum volume. -20dB (61) / -10dB (71) / 0dB (81) Power On Level : Define the volume setting that is active when the power is turned on. <ul style="list-style-type: none"> Last : Use the memorized setting from the last session. --- (0) : Always use the muting on condition when power is turned on. -80dB - +18dB (1 - 99) : The volume is adjusted to the set level. Mute Level : Set the amount of attenuation when muting is on. <ul style="list-style-type: none"> Full : The sound is muted entirely. -40dB : The sound is attenuated by 40 dB down. -20dB : The sound is attenuated by 20 dB down.
Source Delete Remove from the display input sources that are not used.	BD / DVD / VCR / SAT / GAME / AUX1 / USB / TV / CD / SIRIUS / TUNER / M-XPort : Select input source that is not used. <ul style="list-style-type: none"> ON : Use this source. Delete : Do not use this source. <div style="background-color: black; color: white; padding: 2px; display: inline-block;">NOTE</div> Input sources set to "Delete" cannot be selected using SOURCE SELECT .

Setting items	Setting details
On-Screen Display Make the settings related to displays on the TV screen.	Screensaver : Make screensaver settings. <ul style="list-style-type: none"> ON : The screen saver is activated during menu display, iPod or TUNER screen display if no operation is performed for an approximately 3-minute continuous period. When you press $\Delta \nabla \triangleleft \triangleright$, the screensaver is cancelled and the screen before that screen saver started is displayed. OFF : Screensaver is not activated. Text : Display the details of operation when switching surround mode, input mode, etc. <ul style="list-style-type: none"> ON : Turn display on. OFF : Turn display off. Master Volume : Display the master volume during adjustment. <ul style="list-style-type: none"> Bottom : Display at the bottom. Top : Display at the top. OFF : Turn display off.  When the master volume display is hard to see when superimposed on movie subtitles, set to "Top". USB : Set the USB screen display time when the input source is "USB". <ul style="list-style-type: none"> Always : Show display continuously. 30sec : Show display for 30 seconds after operation. 10sec : Show display for 10 seconds after operation. OFF : Turn display off. TUNER : Set the tuner screen display time when the input source is "TUNER" or "SIRIUS". <ul style="list-style-type: none"> Always : Show display continuously. 30sec : Show display for 30 seconds after operation. 10sec : Show display for 10 seconds after operation. OFF : Turn display off.
Zone Rename Change the display title of each zone to one you prefer.	<ul style="list-style-type: none"> Up to 10 characters can be input. For character input, see page 45. Default : The changed display names are reset to the defaults. <ul style="list-style-type: none"> Yes : Reset to the defaults. No : Do not reset to the defaults.




Manual Setup

Setting items	Setting details
DC Trigger Select the condition for activating Trigger Out for the input source, surround mode, etc. See "DC OUT (TRIGGER OUT) jacks" (page 38) for more information on trigger out.	Trigger Out <input type="checkbox"/> When setting for zone (MAIN ZONE / ZONE2) Trigger out is activated through linkage to the power of the zone set to "ON". <input type="checkbox"/> When setting for input source Activate trigger out when the input source set to "ON" is selected. <input type="checkbox"/> When setting for surround mode Activate trigger out when the surround mode set to "ON" is selected. <ul style="list-style-type: none"> • ON : Activate trigger on this mode. • --- : Do not activate trigger on this mode. Default : The "Trigger Out" settings are returned to the default settings. <ul style="list-style-type: none"> • Yes : Reset to the defaults. • No : Do not reset to the defaults.
Display Set the display on/off setting.	ON : Display is always on. Display Auto OFF : Display is off except when showing the status display. Display OFF : Display is always off.  <p>This can also be set by pressing DISPLAY on the remote control unit or main unit. Each time DISPLAY is pressed, the setting is changed as shown below.</p> <pre> graph LR ON --> DisplayAutoOff[Display Auto Off] DisplayAutoOff --> DisplayOff[Display OFF] DisplayOff --> ON </pre>
Setup Lock Protect settings from inadvertent change.	ON : Turn protection on. OFF : Turn protection off. <input type="checkbox"/> When canceling the setting, set "Setup Lock" to "OFF". NOTE When "Setup Lock" is set to "ON", the settings listed below can no longer be changed. Also, "SETUP LOCKED!" is displayed if you attempt to operate related settings. <ul style="list-style-type: none"> • Menu operations • M-DAX • MultEQ® • Dynamic EQ® • Dynamic Volume® • Channel Level

Information


Show information about receiver settings, input signals, etc.

Items	Setting details
Status Show information about current settings. NOTE The information displayed differs according to the input source.	<input type="checkbox"/> MAIN ZONE This item shows information about settings for MAIN ZONE. Select Source / Name / Surround Mode / Input Mode / Decode Mode / Video Select / Video Mode / Content Type / i/p Scaler / Resolution / Progressive Mode / Aspect etc. <input type="checkbox"/> ZONE2 This item shows information about settings for ZONE2. Power / Select Source / Volume Level <input type="checkbox"/> "Status" for ZONE2 is displayed when "Amp Assign" is set to "ZONE2".
Audio Input Signal Show information about audio input signals.	Surround Mode : The currently set surround mode. Signal : The input signal type. fs : The input signal's sampling frequency. Format : The number of channels in the input signal (front, surround, LFE). Offset : The dialogue normalization correction value. Flag : This is displayed when inputting signals including a surround back channel. "MATRIX" is displayed with Dolby Digital EX and DTS-ES Matrix signals, "DISCRETE" with DTS-ES Discrete signals. Dialogue normalization function This function is automatically activated when playing Dolby Digital sources. It automatically corrects the standard signal level for individual program sources. The correction value can be checked using STATUS .  <div> <div>Offset - 4dB</div> <div>The figure is the corrected value. This cannot be changed.</div> </div>
HDMI Information Show information about HDMI input/output signals and monitor.	HDMI Signal Information <ul style="list-style-type: none"> • Resolution / Color Space / Pixel Depth HDMI Monitor Information <ul style="list-style-type: none"> • Interface / Support Resolution
Preset Channel Show information about preset channels.	A / B / C / D / E / F / G A1 - A8 / B1 - B8 / C1 - C8 / D1 - D8 / E1 - E8 / F1 - F8 / G1 - G8
TUNER	

Other settings

Remote control settings

- When you connect a remote control receiver unit (purchased separately) to the REMOTE CONTROL IN terminal of this unit, use the following procedure to disable the remote sensor function of this unit.
- The remote sensor function of remote control signals is enabled by default.

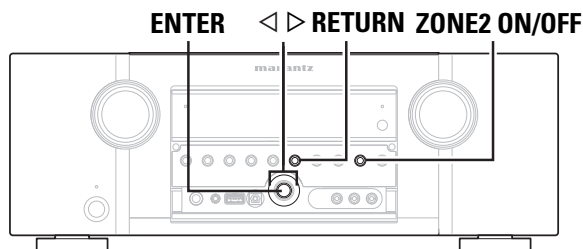

❑ Disabling the sensor function of the remote control

1 To enable the remote signal sensor function, press and hold **ZONE2 ON/OFF** and **RETURN** for 3 seconds.
"IR:< ENABLE >" is displayed.

2 Press **◀▶** to select "DISABLE".

3 Press **ENTER**.
The sensor function of the remote control signal of this unit is disabled.

NOTE

If a remote control receiver unit (purchased separately) is not connected, do not perform this setting. If you do, you will not be able to operate this unit using the remote control.

❑ Enabling the remote sensor function

1 To disable the remote signal sensor function, press and hold **ZONE2 ON/OFF** and **RETURN** for 3 seconds.
"IR:< DISABLE >" is displayed.


2 Press **◀▶** to select "ENABLE".

3 Press **ENTER**.
The sensor function of the remote control signal of this unit is enabled.

Switching the on-screen display output mode

Set whether the menu is operated by the monitor connected to the VIDEO OUT terminal or the monitor connected to the COMPONENT VIDEO MONITOR OUT terminal.

- The factory setting is "Comp".

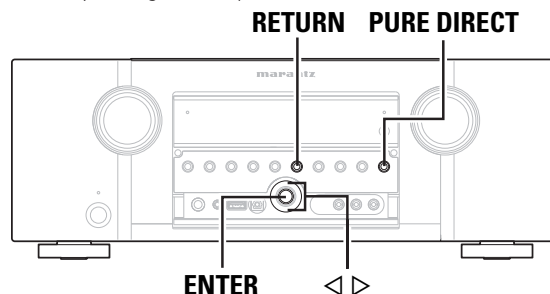

1 Press and hold **RETURN** and **PURE DIRECT** for 3 seconds.

Corresponding to the video signal format settings, "OSD Out: ◀ Comp ▶" or "OSD Out: ◀ Video ▶" is shown in the display.

2 Press **◀▶** to change the settings according to the connection method.

Comp Set when the COMPONENT VIDEO MONITOR OUT connector is connected to a TV.

Video Set when the VIDEO OUT connector is connected to a TV.

3 Press **ENTER** to enter the setting.

NOTE

When operating the on-screen display menu using the monitor connected to the HDMI OUT terminal, either setting may be used without problem.

Operating the connected devices by remote control unit

Registering the supplied preset codes in the remote control unit enables you to operate devices made by other manufacturers.

Operating AV equipment

1 Press the input source select button (☞ page 22).

The operation mode of the remote control unit is switched as shown in the table.

NOTE

Press the input source select buttons once to switch the operation mode of the remote control unit supplied with this unit.

Press the input source select buttons twice consecutively to switch the operation mode of the remote control unit and input source of this unit.



Input source select buttons	Input source of this unit	Devices controllable with the remote control unit (Operation mode)
BD *	BD	Device registered on the BD button
DVD *	DVD	Device registered on the DVD button
VCR *	VCR	Device registered on the VCR button
SAT *	SAT	Device registered on the SAT button
GAME	GAME	Device registered on the GAME button
AUX1	AUX1	Device registered on the AUX1 button
USB	USB	Device registered on the USB button
TV *	TV	Device registered on the TV button
CD *	CD	Device registered on the CD button
SATR	SIRIUS	SIRIUS Satellite Radio
TUNE	TUNER	Radio of this unit
M-XP	M-XPort	Device registered on the M-XP button

* If a preset code is registered for this button, the remote control unit of this unit can control another devices.

NOTE

If the mode of the remote control unit is set to other than amp-operation mode, press **AMP** to switch the remote control unit to the amp-operation mode to perform the following operations:

- For menu operation by pressing **MENU**
- For setting the channel level of the unit by pressing **CH LVL**
- For performing direct playback
- For switching the MultEQ, Dynamic EQ, and Dynamic Volume settings.
- For using the Video Select function.
- For using the sleep timer function.
- For displaying the Source Select screen.
- For switching the M-DAX function.
- For directly selecting "AUTO" and "STEREO" of the listening modes.

2 Operate this unit or the device whose input source is switched.

- For details, refer to the operating instructions for each device. For operations of iPod, SIRIUS and TUNER, see the following pages.
- iPod (☞ page 23)
- SIRIUS (☞ page 27)
- TUNER (☞ page 28)

Registering preset codes

When preset codes are registered in the included remote control unit, it can then be used to operate any devices you have, such as DVD players or TVs made by different manufacturers.

NOTE

- No preset codes other than **BD**, **DVD**, **TV**, **SAT** and **CD** can be registered.
- In the factory settings, remote control codes for all Marantz products are registered.

Buttons used for operating the devices

- ① **SOURCE ON/OFF**
For switching power of each device on or off.
- ② **△ ▽ ◀ ▶, ENTER**
For menu operation of each device.
- ③ **MENU, SETUP, TOP MENU**
For displaying the menu of each device.
- ④ **▶, ■, II, ◀◀, ▶▶, I◀◀, ▶▶I**
- ⑤ Number button (**0 – 9, +10**)
- ⑥ **PRESET +, PRESET –**
- ⑦ **TV POWER, TV INPUT**
For operating a TV
This button is enabled in any mode.

For details on operation with the remote control unit, see pages 23 to 24, 27, 28, and 65.

□ Programming with the 4-digit code

- 1 Press and hold down the input source select buttons for the appliance to control, and press **SET** until the **SEND** indicator blinks twice.
The back light flashes.
- 2 Press the 4-digit code for the appliance using the numeric buttons (code table at the end of this book).
When the procedure is successful, the **SEND** indicator blinks twice.


NOTE

If the indicator did not blink twice, then repeat steps 1 and 2 and try entering the same code again.



□ Scanning the code table

- 1 Switch on the appliance to control.
- 2 Press and hold down the input source select buttons for the appliance to control, and press **SET** until the **SEND** indicator blinks twice.
The back light flashes.
- 3 Aim the remote control at the appliance and slowly alternate between pressing **INPUT** ▲ and **SOURCE ON/OFF** for the appliance.
- 4 Stop when the appliance turns off.
- 5 Press **ENTER** once to lock in the code.

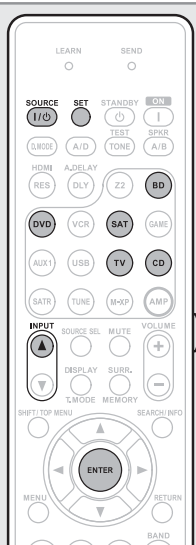

□ Checking the code

- 1 Press and hold down the input source select buttons for appliance to control, and press **SET** until the **SEND** indicator blinks twice and back light flashes.
The back light flashes.
- 2 Press **SEARCH/INFO**.
The **SEND** indicator blinks twice.
- 3 To view the code for first digit, press **1** once.
Count the number of times the **SEND** indicator blinks (e.g. 3 blinks = 3) and write down the number.
- 4 Then press **2** to check the second digit of the code. Now press **3** and **4** to check the third and fourth digits of the code.

NOTE

If a code digit is "0", the **SEND** indicator does not blink.



□ Resetting the code

The devices shown below are registered for each input source button as default. Settings can be changed according to the devices to be used.

- 1 Press and hold down the input source select buttons for appliance to control and press **SET** until the **SEND** indicator blinks twice.
The back light flashes.
- 2 Press the codes below to reset the code.
The indicator will blink twice.



Input source select buttons	Category	Preset code
BD	Blu-ray Disc player	5000
DVD	DVD player	2000
TV	Television	1000
SAT	Satellite set top box	4000
CD	CD player	3000

NOTE

After this procedure, the selected source reset to its initial code.

Operating components

The supplied remote control unit can control a component other than this unit.


1 Switch the input source
( page 22).

2 Operate the component.

• For details, refer to the component's operating instructions.




Blu-ray Disc player / HD-DVD player / DVD player / DVD recorder operation




Operation buttons	Function
SOURCE ON/OFF	Power on/standby
MENU	(Popup) Menu
TOP MENU	Top menu
Δ ∇ ◀ ▶	Cursor operation
ENTER	Enter
◀◀ ▶▶	Manual search (fast-reverse/fast-forward)
▶	Playback
◀◀ ▶▶	Auto search (cue)
 	Pause
■	Stop
0 - 9	Select title, chapter or channel selection
CLR	Clear the inputting
TV POWER	TV power on/standby (Default : Marantz)
TV INPUT	Switch TV input (Default : Marantz)

CD player / CD recorder operation



Operation buttons	Function
SOURCE ON/OFF	Power on/off
◀◀ ▶▶	Manual search (fast-reverse/fast-forward)
▶	Playback
◀◀ ▶▶	Auto search (cue)
 	Pause
■	Stop
CLR	Clear the inputting
TV POWER	TV power on/standby (Default : Marantz)
TV INPUT	Switch TV input (Default : Marantz)

TV operation



Operation buttons	Function
SOURCE ON/OFF	TV power on/standby (Default : Marantz)
PRESET +, -	Switch channels (up/down)
CLR	Clear the inputting
TV POWER	TV power on/standby (Default : Marantz)
TV INPUT	Switch TV input (Default : Marantz)

Set top box for satellite (SAT) operation



Operation buttons	Function
SOURCE ON/OFF	Power on/standby
PRESET +, -	Switch channels (up/down)
Δ ∇ ◀ ▶	Cursor operation
ENTER	Enter
0 - 9	Channel selection
CLR	Clear the inputting
TV POWER	TV power on/standby (Default : Marantz)
TV INPUT	Switch TV input (Default : Marantz)

Operating learn mode

This remote control unit is capable of learning and storing codes used by other remote controls that you already own.

For codes which are not learned, the remote control unit will transmit either the Marantz preset codes from the initial settings, or remote codes from another manufacturer's AV equipment which is set by the customer.

The receiver sensor for the remote control unit signals is located at the top of the remote control unit.




This remote control unit is capable of learning around 160 codes.

NOTE

The learning procedure does not operate correctly if the batteries have become worn.

Learning procedure

- 1 Place the Marantz remote control and remote control from the other device approximately 5 cm apart, with the remote control signal transmission sections facing each other.

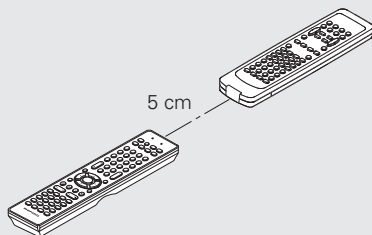

- 2 Press and hold down **SET** and **SOURCE SEL** until the **LEARN** indicator blinks.

- 3 Press input source select buttons to select the input source.



4 Select the button to be learned.

LEARN indicator lights up.

NOTE

- The learning function is unavailable for all **SOURCE** and **D.MODE** in any mode.
- The learning function is unavailable for all buttons in TUNER mode and AMP mode.

- 5 Press and hold the button of the original remote control unit to be learned until the **SEND** indicator blinks twice.

NOTE

- If the **SEND** indicator blinks once, repeat this step.
- If the **LEARN** indicator flashes when the **SEND** indicator is lit, then the button cannot be learned.
- When the memory of the remote control unit is full, the **LEARN** and **SEND** indicators blink once. If you want to learn the code, you need to erase a different learned button.

- 6 Repeat steps 4 and 5 to learn other buttons for the same input source.

- 7 Repeat steps 3 to 6 to learn other input sources.

- 8 When programming of the remote control unit is completed, press **SET**.

The **LEARN** display disappears, and the remote control unit exits learn mode.

NOTE

- When the **SEND** indicator blinks once again, the transmitting code is unavailable for remote control unit, or the transmitting signal has been interrupted by noise.
- If no buttons are pressed for approximately 1 minutes while in the **LEARN** mode, the remote control unit automatically exits from the **LEARN** mode.

Erasing programmed codes

Codes can be erased in three ways: by buttons, sources, and by all memory contents.

Erasing the code by buttons

- 1 Press and hold down **SET** and **SOURCE SEL** until the **LEARN** indicator blinks.

- 2 Press input source select buttons to select the input source you want to delete.

- 3 Press and hold down **D.MODE** and press the learned button to be erased twice.

SEND indicator blinks twice and the mode returns to **LEARN** mode.

- 4 To return the normal mode, press **SET**.



Erasing the code by SOURCE


- 1 Press and hold down **SET** and **SOURCE SEL** until the **LEARN** indicator blinks.

- 2 Press and hold down **D.MODE** and press the learned input source select buttons to be erased twice.

LEARN indicator lights.

- 3 Press **ENTER** to continue erasing.
 - The **SEND** indicator blinks twice and the mode returns to **LEARN** mode.
 - To cancel the erasing operation, do not press **ENTER**, and simply press any other button.

- 4 To return the normal mode, press **SET**.

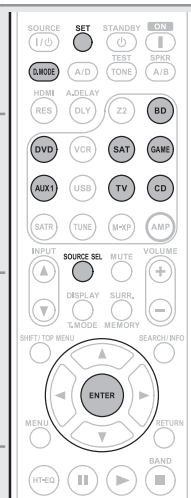

Operating learn mode

Erasing the all sources

- 1** Press and hold down **SET** and **SOURCE SEL** until the **LEARN** indicator blinks.
- 2** Press and hold down **D.MODE** and press **ON** and **STANDBY**.
LEARN indicator lights.
- 3** Press **ENTER** to continue erasing.
 - The SEND indicator blinks twice and the mode returns to LEARN mode.
 - To cancel the erasing operation, do not press **ENTER** and simply press any other button.
- 4** To return the normal mode, press **SET**.



NOTE

Erasing codes will return to the factory preset code, or there will leave empty if the button has no factory preset code.


Setting the back light

Press the Light button on the side of the remote control, and the buttons on the remote control light for 2 seconds. If the Light button is pressed while the buttons are lit, the buttons remain lit for another 2 seconds.

- Backlight is set on in the factory settings.


Disabling the backlight

Press and hold both **SET** and **STANDBY** until the **SEND** indicator flashes twice.








Turning the backlight on

Press and hold both **SET** and **ON** until the **SEND** indicator flashes twice.



Information


Here, we list various information related to this unit.
Please refer to this information as needed.

- Part names and functions  page 69
- Other information  page 73
- Troubleshooting  page 80
- Specifications  page 83
- Index  page 83

Part names and functions


Front panel

For buttons not explained here, see the page indicated in parentheses ().

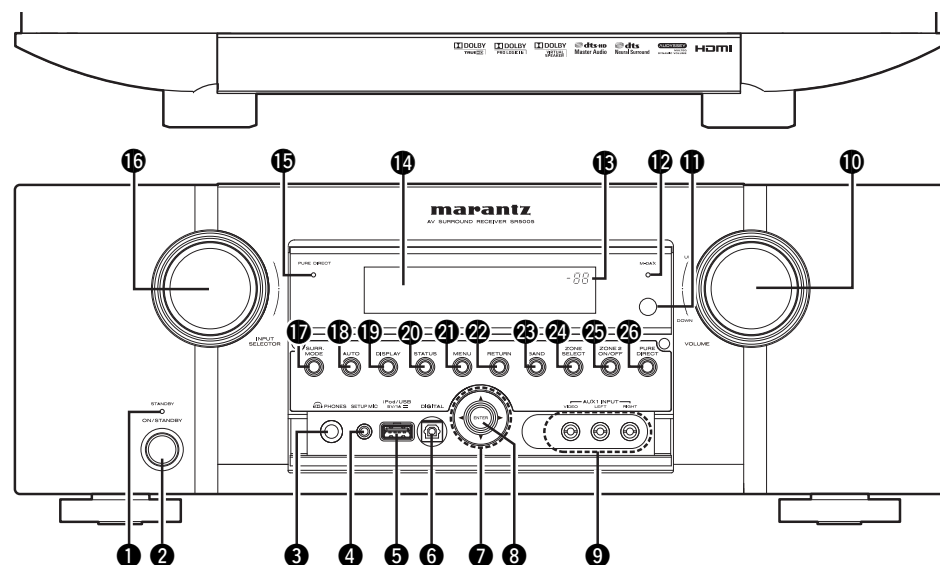

- | | |
|---|---|
| 1 Power indicator (11) | 10 VOLUME control knob (22) |
| 2 Power operation button (ON/STANDBY) (6, 11)
Turns power to this unit on and off (standby). | 11 Remote control sensor (72) |
| 3 Headphones jack (PHONES)
When the headphones are plugged into this jack, audio will no longer be output from the connected speakers or from the PRE OUT connectors. | 12 M-DAX indicator (55) |
| NOTE
To prevent hearing loss, do not raise the volume level excessively when using headphones. | 13 Master volume indicator |
| 4 SETUP MIC jack (8, 37) | 14 Display (69) |
| 5 iPod/USB port (19) | 15 PURE DIRECT indicator (31) |
| 6 DIGITAL connector (18) | 16 INPUT SELECTOR knob (22) |
| 7 Cursor buttons (Δ ▽ ◀ ▶) (44 – 46) | 17 SURROUND MODE button (29) |
| 8 ENTER button (44 – 46) | 18 AUTO button (29) |
| 9 AUX1 INPUT connector (18) | 19 DISPLAY button (61) |
| | 20 STATUS button (23, 25, 61) |
| | 21 MENU button (46) |
| | 22 RETURN button (44 – 46) |
| | 23 BAND button (27, 82) |
| | 24 ZONE SELECT button (42) |
| | 25 ZONE2 ON/OFF button (42) |
| | 26 PURE DIRECT button (31, 62) |

Display

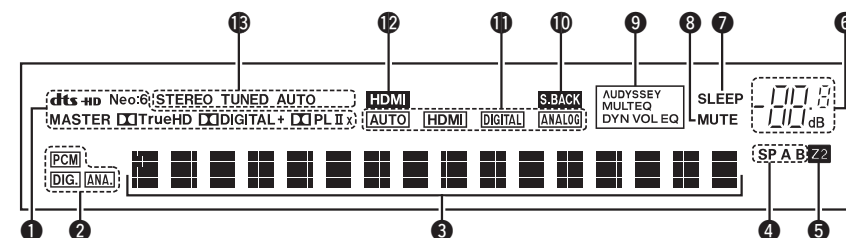

1 Decoder indicators

These light when the respective decoders are operating.

2 Input signal indicators

3 Information display

The input source name, surround mode, setting values and other information are displayed here.

4 Front speaker indicator

This lights when audio signals are being output from the speakers.

5 ZONE2 indicator

This lights when ZONE2 (separate room) power is turned on (page 42).

6 Master volume indicator

When performing setting operations, displays the menu number.

7 Sleep timer indicator

This lights when the sleep mode is selected (page 40).

8 MUTE indicator

This lights when the mute mode is selected (page 22).

9 Audyssey® indicators

Lighting is as follows, depending on the setting of "Dynamic EQ" (page 54) and "Dynamic Volume" (page 54).

AUDYSSEY MULTEQ DYN VOL	When "Dynamic EQ" and "Dynamic Volume" are "ON".
AUDYSSEY MULTEQ DYN EQ	When "Dynamic EQ" is "ON" and "Dynamic Volume" is "OFF".
AUDYSSEY MULTEQ	When "Dynamic EQ" and "Dynamic Volume" are "OFF".

10 Surround back indicator

This lights when audio signals are being output from the surround back speakers (page 57).

11 Input mode indicators

Set the audio input modes for the different input sources (page 50).

12 HDMI indicator

This lights when playing using HDMI connections.

13 Tuner reception mode indicators

These light according to the reception conditions when the input source is set to "TUNER".


STEREO: In the FM mode, this light when receiving analog stereo broadcasts.

TUNED: Lights when the broadcast is properly tuned in.

AUTO: This light when in the auto tuning mode.

Rear panel

See the page indicated in parentheses ().

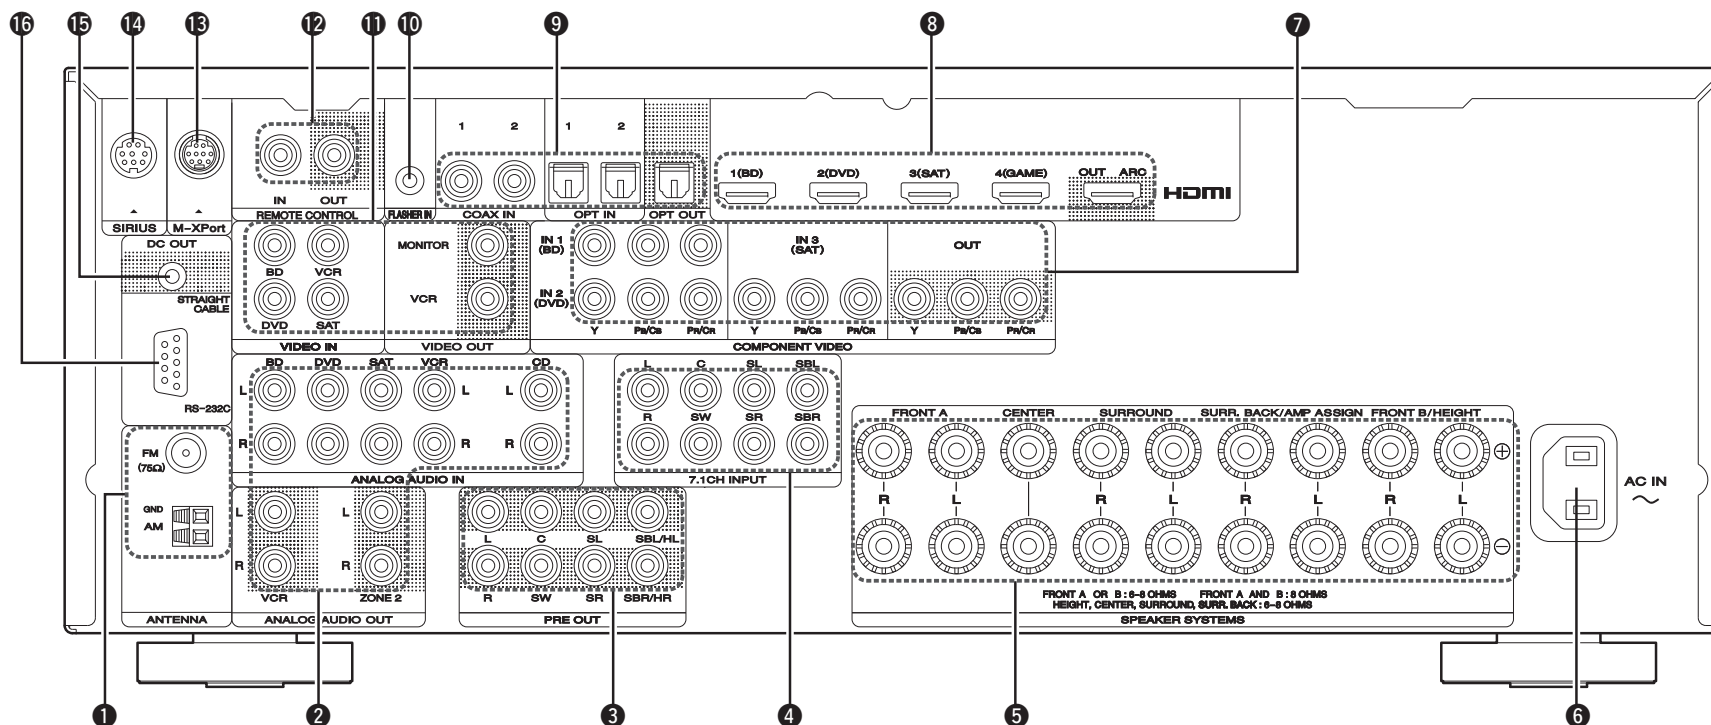

- ① FM/AM antenna terminals (20)
- ② Analog audio connectors (16 – 18, 21)
- ③ PRE OUT connector (5, 21, 34 – 36)
- ④ 7.1CH INPUT connectors (21)
- ⑤ Speaker terminals (5, 34 – 36)
- ⑥ AC inlet (AC IN) (5)
- ⑦ COMPONENT VIDEO connectors (16, 17)
- ⑧ HDMI connectors (15)
- ⑨ Digital audio connectors (16 – 18)


- ⑩ FLASHER IN jack
Used when using a control BOX or other such control devices to control this unit.
- ⑪ VIDEO connectors (16 – 18)
- ⑫ REMOTE CONTROL connectors (38)
- ⑬ M-XPort connector (18, 38)
- ⑭ SIRIUS connector (20)
- ⑮ DC OUT jack (38)
- ⑯ RS-232C connector (38)

NOTE

Do not touch the inner pins of the connectors on the rear panel. Electrostatic discharge may cause permanent damage to the unit.

Remote control unit


For buttons not explained here, see the page indicated in parentheses ().

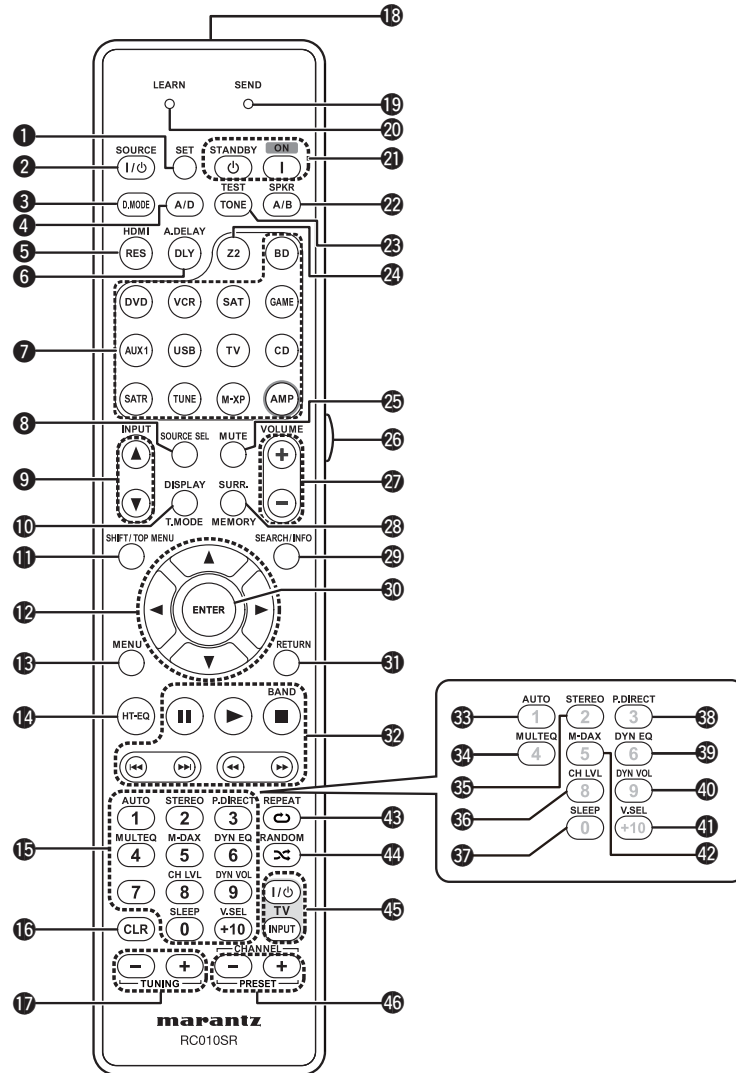


- 1 SET button (64, 66, 67)
- 2 SOURCE power button (63 – 65)
- 3 Decode mode button (D.MODE) (50)
- 4 Input mode button (A/D) (50)
- 5 Resolution button (HDMI/RES) (49)
- 6 Audio delay button (DLY) (55)
- 7 Input source select buttons (22, 63, 65)
- 8 Source select button (SOURCE SEL) (22)
- 9 INPUT buttons (22, 42)
- 10 DISPLAY/Tuner mode (T.MODE) button (27, 61)
- 11 SHIFT/TOP MENU (26, 27, 45)
- 12 Cursor buttons (Δ ▽ ◀ ▶) (44 – 46)
- 13 MENU button (46)
- 14 HT-EQ button (52)
- 15 Number buttons (26, 65)
- 16 Clear button (CLR) (65)
- 17 TUNING buttons (+, –) (25, 27)
- 18 Remote control signal transmitter (72)
- 19 SEND indicator (67)
- 20 LEARN indicator (66)
- 21 Power buttons (ON, STANDBY) (6, 11)
- 22 Speaker A/B button (SPKR A/B) (58)
- 23 TEST TONE button (58)
- 24 ZONE2 button (Z2) (42)
- 25 Muting button (MUTE) (11, 22)
- 26 Light button (67)
- 27 Master volume control buttons (VOLUME +, –) (11, 22)
- 28 Surround mode (SURR.)/MEMORY button (26, 27, 29 – 31)
- 29 SEARCH/Information (INFO) button (23, 24, 26 – 28, 46, 64)
- 30 ENTER button (44 – 46)
- 31 RETURN button (44 – 46)
- 32 System buttons (23, 24, 65)
 - Pause button (II)
 - Play button (▶)
 - Stop button (■)
 - Skip button (I◀◀, ▶▶I)
 - Search button (◀◀, ▶▶)
- FM/AM band switching button (BAND) (27, 28)
- 33 AUTO button (29)
- 34 MULTEQ® button (53, 59)
- 35 STEREO button (31)
- 36 Channel level button (CH LVL) (40)
- 37 SLEEP button (40)
- 38 Pure direct button (P.DIRECT) (31)
- 39 Dynamic EQ® button (DYN EQ) (54)
- 40 Dynamic Volume® button (DYN VOL) (54)
- 41 Video select button (V.SEL) (49)
- 42 M-DAX button (55)
- 43 REPEAT button (23, 24)
- 44 RANDOM button (23, 24)
- 45 TV operation buttons (TV POWER / INPUT) (65)
- 46 CHANNEL/PRESET buttons (+, –) (26 – 28, 65)

Inserting the batteries

- ① Remove the rear lid in the direction of the arrow and remove it.



- ② Load the two batteries properly as indicated by the marks in the battery compartment.




- ③ Put the rear cover back on.

NOTE

- Insert the specified batteries in the remote control unit.
- Replace the batteries with new ones if the set does not operate even when the remote control unit is operated close to the unit. (The supplied batteries are only for verifying operation.)
- When inserting the batteries, be sure to do so in the proper direction, following the \oplus and \ominus marks in the battery compartment.
- To prevent damage or leakage of battery fluid:
 - Do not use a new battery together with an old one.
 - Do not use two different types of batteries.
 - Do not attempt to charge dry batteries.
 - Do not short-circuit, disassemble, heat or dispose of batteries in flames.
 - Do not keep the battery in a place exposed to direct sunlight or in places with extremely high temperatures, such as near a heater.
- If the battery fluid should leak, carefully wipe the fluid off the inside of the battery compartment and insert new batteries.
- Remove the batteries from the remote control unit if it will not be in use for long periods.
- Used batteries should be disposed of in accordance with the local regulations regarding battery disposal.

Operating range of the remote control unit

Point the remote control unit at the remote sensor when operating it.

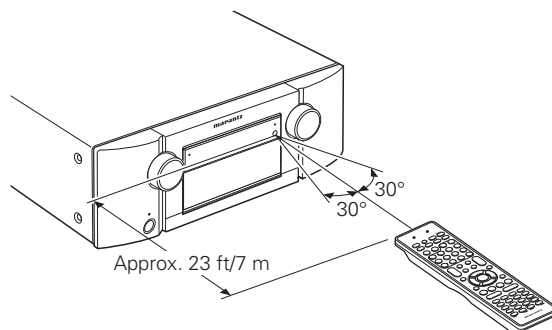

NOTE











The set may function improperly or the remote control unit may not operate if the remote control sensor is exposed to direct sunlight, strong artificial light from an inverter type fluorescent lamp or infrared light.

Other information

- ❑ **Trademark information** (👉 page 73)
- ❑ **Surround** (👉 page 74)
- ❑ **Explanation of terms** (👉 page 78)

Trademark information

This product uses the following technologies:

   	<p>Manufactured under license from Dolby Laboratories. "Dolby", "Pro Logic" and the double-D symbol are trademarks of Dolby Laboratories.</p>		<p>HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.</p>
	<p>Manufactured under license under U.S. Patent #'s: 5,451,942; 5,956,674; 5,974,380; 5,978,762; 6,226,616; 6,487,535; 7,212,872; 7,333,929; 7,392,195; 7,272,567 & other U.S. and worldwide patents issued & pending. DTS and the Symbol are registered trademarks, & DTS-HD, DTS-HD Master Audio, and the DTS logos are trademarks of DTS, Inc. Product includes software. © DTS, Inc. All Rights Reserved.</p>		<p>Manufactured under license from Audyssey Laboratories™. U.S. and foreign patents pending. Audyssey MultEQ® is a registered trademark of Audyssey Laboratories. Audyssey Dynamic EQ® is a registered trademark of Audyssey Laboratories. Audyssey Dynamic Volume® is a trademark of Audyssey Laboratories.</p>
	<p>Manufactured under license from DTS Licensing Limited. DTS and the Symbol are registered trademarks, & DTS Neural Surround and the DTS logos are trademark of DTS, Inc. Product includes software. © DTS, Inc. All Rights Reserved.</p>		<p>"Made for iPod" and "Made for iPhone" mean that an electronic accessory has been designed to connect specifically to iPod or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. iPhone, iPod, iPod classic, iPod nano, iPod shuffle, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.</p> <ul style="list-style-type: none"> Individual users are permitted to use iPhone, iPod, iPod classic, iPod nano, iPod shuffle, and iPod touch for private copy and playback of non-copyrighted contents and contents whose copy and playback is permitted by law. Copyright infringement is prohibited by law.
	<p>SIRIUS, XM and all related marks and logos are trademarks of Sirius XM Radio Inc. and its subsidiaries. All rights reserved. Service not available in Alaska and Hawaii.</p>		

Surround

This unit is equipped with a digital signal processing circuit that lets you play program sources in the surround mode to achieve the same sense of presence as in a movie theater.

Surround modes and surround parameters

This table shows the speakers that can be used in each surround mode and the surround parameters adjustable in each surround mode.

Symbols in the table

- This indicates the audio output channels or surround parameters that can be set.
- ◎ This indicates the audio output channels. The output channels depend on the settings of “Speaker Config.” (page 56).

Surround mode (page 29)	Channel output						Surround Parameter (page 52)			
	Front L/R	Center	Surround L/R	Surround Back L/R	Front Height L/R	Subwoofer	HT-EQ. * 3 (page 52)	DRC * 4 (page 52)	D. Comp * 5 (page 52)	LFE * 6 (page 52)
PURE DIRECT (2channel)	○					◎ * 2		○	○	
PURE DIRECT (Multi-channel)	○	◎	◎	◎ * 1	◎ * 1	○		○	○	○
DIRECT (2channel)	○					◎ * 2		○	○	
DIRECT (Multi-channel)	○	◎	◎	◎ * 1	◎ * 1	○		○	○	○
STEREO	○					○	○	○	○	○
MULTI CH IN	○	◎	◎	◎		○	○			○
DOLBY PRO LOGIC IIz	○	◎	◎		◎	◎	○	○	○	
DOLBY PRO LOGIC IIx	○	◎	◎	◎		○	○	○	○	
DOLBY PRO LOGIC II	○	◎	◎			○	○	○	○	
DTS NEO:6	○	◎	◎	◎		○	○	○	○	
DOLBY DIGITAL	○	◎	◎	◎	◎	◎	○		○	○
DOLBY DIGITAL Plus	○	◎	◎	◎	◎	○	○		○	○
DOLBY TrueHD	○	◎	◎	◎	◎	◎	○	○		○
DTS SURROUND	○	◎	◎	◎	◎	○	○		○	○
DTS 96/24	○	◎	◎	◎	◎	◎	○		○	○
DTS-HD	○	◎	◎	◎	◎	○	○		○	○
DTS Express	○	◎	◎	◎	◎	○	○		○	○
MULTI CH STEREO	○	◎	◎	◎		○			○	○
DOLBY VIRTUAL SPEAKER	○					◎ * 2	○		○	○
Neural	○	◎	◎	◎		○	○			
Dolby Headphone	○									

- * 1 A signal for each channel contained in an input signal is output as audio.
- * 2 Only when “Subwoofer Mode” is set to “LFE+Main” (page 57), sound is output from the subwoofer.
- * 3 For HD Audio whose sampling frequency of an input signal is more than 96kHz, this sound parameter cannot be set.
- * 4 This item can be selected when a Dolby TrueHD signal is played.
- * 5 This item can be selected when a Dolby Digital or DTS signal is played.
- * 6 This item can be selected when a Dolby Digital or DTS signal or DVD-Audio is played.

Surround mode (🔧 page 29)	Surround Parameter (🔧 page 52)					Tone * 7 (🔧 page 53)	Audyssey Settings * 11 (🔧 page 53)			M-DAX * 10 (🔧 page 55)
	Height Gain (🔧 page 53)	Panorama (🔧 page 52)	PRO LOGIC II/IIx Music mode only		NEO:6 Music mode only		MultEQ® (🔧 page 53)	Dynamic EQ® * 8 (🔧 page 54)	Dynamic Volume® * 9 (🔧 page 54)	
			Dimension (🔧 page 52)	Center Width (🔧 page 52)	Center Image (🔧 page 52)					
PURE DIRECT (2 channel)										
PURE DIRECT (Multi-channel)										
DIRECT (2 channel)										
DIRECT (Multi-channel)										
STEREO						○	○	○	○	○
MULTI CH IN						○	○	○	○	
DOLBY PRO LOGIC IIz	○					○	○	○	○	○
DOLBY PRO LOGIC IIx		○	○	○		○	○	○	○	○
DOLBY PRO LOGIC II		○	○	○		○	○	○	○	○
DTS NEO:6					○	○	○	○	○	○
DOLBY DIGITAL						○	○	○	○	
DOLBY DIGITAL Plus						○	○	○	○	
DOLBY TrueHD						○	○	○	○	
DTS SURROUND						○	○	○	○	
DTS 96/24						○	○	○	○	
DTS-HD						○	○	○	○	
DTS Express						○	○	○	○	
MULTI CH STEREO						○	○	○	○	○
DOLBY VIRTUAL SPEAKER						○	○	○	○	○
Neural						○	○	○	○	○
Dolby Headphone						○	○	○	○	○

* 7 This item cannot be set when "Dynamic EQ" (page 54) is set to "ON".

* 8 This item cannot be set when "MultEQ" (page 53) is set to "OFF" or "Manual".

* 9 This item cannot be set when "Dynamic EQ" (page 54) is set to "OFF".

* 10 This item can be set when the input signal is analog, PCM 48 kHz or 44.1 kHz.

* 11 For HD Audio whose sampling frequency of an input signal is more than 96 kHz, this sound parameter cannot be set.

Types of input signals, and corresponding surround modes

This table shows the input signal that can be played in each surround mode. Check the audio signal of the input source then select the surround mode.

Symbols in the table

○ This indicates the selectable surround mode.

Surround mode (参考 page 29)	NOTE	Input signal types and formats															
		ANALOG	PCM		DTS-HD		DTS					DOLBY		DOLBY DIGITAL			
			LINEAR PCM (multi ch)	LINEAR PCM (2ch)	DTS-HD Master Audio	DTS-HD High Resolution Audio	DTS EXPRESS	DTS ES DSCRT (With Flag)	DTS ES MTRX (With Flag)	DTS (5.1ch)	DTS 96/24	DOLBY TrueHD	DOLBY DIGITAL Plus	DOLBY DIGITAL EX (With Flag)	DOLBY DIGITAL EX (With no Flag)	DOLBY DIGITAL (5.1/5/4ch)	DOLBY DIGITAL (2ch)
DTS SURROUND																	
DTS-HD MSTR					○												
DTS-HD HI RES						○											
DTS ES DSCRT6.1	* 1 * 4							○									
DTS ES MTRX6.1	* 1 * 4								○								
DTS SURROUND								○	○	○							
DTS 96/24											○						
DTS (–HD) + PLIIx MOVIE	* 2 * 4				○	○	○	○	○	○	○						
DTS (–HD) + PLIIx MUSIC	* 1 * 4				○	○	○	○	○	○	○						
DTS (–HD) + PLIIz	* 3				○	○	○	○	○	○	○						
DTS EXPRESS							○										
DTS (–HD) + NEO:6	* 1 * 4				○	○	○		○	○	○						
DTS NEO:6 CINEMA		○		○													○
DTS NEO:6 MUSIC		○		○													○
DOLBY SURROUND																	
DOLBY TrueHD												○					
DOLBY DIGITAL+													○				
DOLBY DIGITAL EX	* 1 * 4													○	○	○	
DOLBY (D+) (HD) +EX	* 1 * 4											○	○				
DOLBY DIGITAL														○	○	○	
DOLBY (D) (D+) (HD) +PLIIx MOVIE	* 2 * 4											○	○	○	○	○	
DOLBY (D) (D+) (HD) +PLIIx MUSIC	* 1 * 4											○	○	○	○	○	
DOLBY (D) (D+) (HD) +PLIIz	* 3											○	○	○	○	○	
DOLBY PRO LOGIC IIx MOVIE	* 1 * 4	○		○													○
DOLBY PRO LOGIC IIx MUSIC	* 1 * 4	○		○													○
DOLBY PRO LOGIC IIx GAME	* 1 * 4	○		○													○
DOLBY PRO LOGIC IIz	* 3	○		○													○
DOLBY PRO LOGIC II MOVIE		○		○													○
DOLBY PRO LOGIC II MUSIC		○		○													○
DOLBY PRO LOGIC II GAME		○		○													○
DOLBY VIRTUAL SPEAKER		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
DOLBY HEADPHONE		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

* 1 If "Speaker Config." - "S.Back" (page 57) is set to "None", this surround mode cannot be selected.

* 2 If "Speaker Config." - "S.Back" (page 57) is set to "1sp" or "None", this surround mode cannot be selected.

* 3 If "Speaker Config." - "Front Height" (page 57) is set to "None", this surround mode cannot be selected.

* 4 This surround mode can be selected when "Amp Assign" (page 56) is set to "Normal".

Surround mode (🔍 page 29)	NOTE	Input signal types and formats															
		ANALOG	PCM		DTS-HD		DTS					DOLBY		DOLBY DIGITAL			
			LINEAR PCM (multi ch)	LINEAR PCM (2ch)	DTS-HD Master Audio	DTS-HD High Resolution Audio	DTS EXPRESS	DTS ES DSCRT (With Flag)	DTS ES MTRX (With Flag)	DTS (5.1ch)	DTS 96/24	DOLBY TrueHD	DOLBY DIGITAL Plus	DOLBY DIGITAL EX (With Flag)	DOLBY DIGITAL EX (With no Flag)	DOLBY DIGITAL (5.1/5/4ch)	DOLBY DIGITAL (2ch)
MULTI CH IN																	
MULTI CH IN			○														
MULTI CH IN + PLIIx MOVIE	* 2 * 4		○														
MULTI CH IN + PLIIx MUSIC	* 1 * 4		○														
MULTI CH IN + PLIIz	* 3		○														
MULTI CH IN + Dolby EX	* 1 * 4		○														
MULTI CH IN 7.1	* 1 * 4		○														
DIRECT		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
PURE DIRECT		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
MULTI CH STEREO		○	○	○				○	○	○	○			○	○	○	○
STEREO		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
NEURAL		○		○													○
AUTO		○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

- * 1 If "Speaker Config." – "S.Back" (page 57) is set to "None", this surround mode cannot be selected.
 * 2 If "Speaker Config." – "S.Back" (page 57) is set to "1sp" or "None", this surround mode cannot be selected.
 * 3 If "Speaker Config." – "Front Height" (page 57) is set to "None", this surround mode cannot be selected.
 * 4 This surround mode can be selected when "Amp Assign" (page 56) is set to "Normal".

Explanation of terms

A

A2DP

A2DP is one profile of Bluetooth defined for in-car devices or AV devices that use wireless communication instead of a cable.

Adobe RGB color / Adobe YCC601 color

Like x.v.Color, each of these color spaces defines a palette of available colors that is larger than the traditional RGB color model.

Audyssey Dynamic EQ®

Audyssey Dynamic EQ solves the problem of deteriorating sound quality as volume is decreased by taking into account human perception and room acoustics. Audyssey Dynamic EQ works in tandem with Audyssey MultEQ® to provide well-balanced sound for every listener at any volume level.

Audyssey Dynamic Volume®

Audyssey Dynamic Volume solves the problem of large variations in volume level between television programs, commercials, and between the soft and loud passages of movies. Audyssey Dynamic EQ is integrated into Dynamic Volume so that as the playback volume is adjusted automatically, the perceived bass response, tonal balance, surround impression, and dialog clarity remain the same.

Audyssey MultEQ®

Audyssey MultEQ is a room equalization solution that calibrates any audio system so that it can achieve optimum performance for every listener in a large listening area. Based on several room measurements, MultEQ calculates an equalization solution that corrects for both time and frequency response problems in the listening area and also performs a fully automated surround system setup.

Auto Lip Sync

If you connect the receiver to a TV that supports the Auto Lip Sync function, it can automatically correct delay between the audio and video.

B

Bluetooth

Bluetooth is a short-distance wireless communication technology used for connecting handheld devices several meters apart. This enables notebook computers, PDA s, mobile phones, etc. to connect without a cable for transmitting audio and data.

D

Deep Color

This technology allows expression of more number of colors than the conventional 8 bits and can reproduce colors close to natural ones without color streak.

Dolby Digital

Dolby Digital is a multi-channel digital signal format developed by Dolby Laboratories.

A total of 5.1 channels are played: 3 front channels ("FL", "FR" and "C"), 2 surround channels ("SL" and "SR") and the "LFE" channel for low frequencies.

Because of this, there is no crosstalk between channels and a realistic sound field with a "three-dimensional" feeling (sense of distance, movement and positioning) is achieved.

A realistic, powerful sense of presence is achieved when playing movie sources in AV rooms as well.

Dolby Digital EX

Dolby Digital EX is a 6.1-channel surround format proposed by Dolby Laboratories that allows users to enjoy in their homes the "DOLBY DIGITAL SURROUND EX" audio format jointly developed by Dolby Laboratories and Lucas Films.

The 6.1 channels of sound, including surround back channels, provide improved sound positioning and expression of space.

Dolby Digital Plus

Dolby Digital Plus is an improved Dolby Digital signal format that is compatible with up to 7.1 channels of discrete digital sound and also improves sound quality thanks to extra data bit rate performance. It is upwardly compatible with conventional Dolby Digital, so it offers greater flexibility in response to the source signal and the conditions of the playback equipment.

Dolby Headphone

The Dolby Headphone technology provides a surround sound listening experience over headphones.

When listening to multichannel content such as DVD movies over headphones, the listening experience is fundamentally different than listening to speakers. Since the headphone speaker drivers are covering the pinna of the ear, the listening experience differs greatly from traditional speaker playback. Dolby utilizes patented headphone perspective curves to solve this problem and provides a non-fatiguing, immersive, home theater listening experience. Dolby Headphone also delivers exceptional 3D audio from stereo material.

Dolby TrueHD

Dolby TrueHD is a high definition audio technology developed by Dolby Laboratories, using lossless coding technology to faithfully reproduce the sound of the studio master.

This format provides the facility to support up to 8 audio channels with a sampling frequency of 96kHz/24bit resolution and up to 6 audio channels with a sampling frequency of 192kHz/24bit resolution. Dolby TrueHD is adopted for applications that put very high importance on sound quality.

Dolby Pro Logic II

Dolby Pro Logic II is a matrix decoding technology developed by Dolby Laboratories.

Regular music such as that on CDs is encoded into 5 channels to achieve an excellent surround effect. The surround channel signals are converted into stereo and full band signals (with a frequency response of 20 Hz to 20 kHz or greater) to create a "three-dimensional" sound image offering a rich sense of presence for all stereo sources.

Dolby Pro Logic IIx

Dolby Pro Logic IIx is a further improved version of the Dolby Pro Logic II matrix decoding technology. Audio signals recorded in 2 channels are decoded to achieve a natural sound with up to 7.1 channels. There are three modes: "Music" suited for playing music, "Movie" suited for playing movies, and "Game" which is optimized for playing games.

Dolby Pro Logic IIz

Dolby Pro Logic IIz introduces a new dimension to Home Entertainment through the addition of a pair of front height channels. Compatible with stereo, 5.1-channel and 7.1-channel content, Dolby Pro Logic IIz provides enhanced spaciousness, depth and dimension to movies, concert video and video game playback while maintaining the full integrity of the source mix.

Dolby Pro Logic IIz identifies and decodes spatial cues that occur naturally in all content, directing this information to the front height channels, complementing the performance of left and right surround sound speakers. Content that is encoded with Dolby Pro Logic IIz height channel information can be even more revealing, with perceptually discrete height channel information bringing an exciting new dimension to home entertainment.

Dolby Pro Logic IIz, with front height channels is also an ideal alternative for households that cannot support the placement of back surround speakers of a typical 7.1-channel system but may have bookshelf space available to support the addition of height speakers.

Dolby Virtual Speaker

Dolby Virtual Speaker is a technology certified by Dolby Laboratories that creates a virtualized surround sound experience from two speakers using a multichannel Dolby Digital source. Additionally, Dolby Virtual Speaker can simulate the surround sound effect produced by Dolby Pro Logic or Dolby Pro Logic II.

Dolby Virtual Speaker retains all the original Multichannel audio information and provides the listener with the sensation of being surrounded by additional speakers.

Downmix

This function converts the number of channels of surround audio to less number of channels and plays back.

DTS

This is an abbreviation of Digital Theater System, which is a digital audio system developed by DTS. When playing back audio by connecting this system with a device such as DTS amplifier, accurate sound field position and realistic sound effect as if you are in a movie theater can be obtained.

DTS 96/24

DTS 96/24 is a digital audio format enabling high sound quality playback in 5.1 channels with a sampling frequency of 96 kHz and 24 bit quantization on DVD-Video.

DTS Digital Surround

DTS Digital Surround is the standard digital surround format of DTS, Inc., compatible with a sampling frequency of 44.1 or 48 kHz and up to 5.1 channels of digital discrete surround sound.

DTS-ES™ Discrete 6.1

DTS-ES™ Discrete 6.1 is a 6.1-channel discrete digital audio format adding a surround back (SB) channel to the DTS digital surround sound. Decoding of conventional 5.1-channel audio signals is also possible according to the decoder.

DTS-ES™ Matrix 6.1

DTS-ES™ Matrix 6.1 is a 6.1-channel discrete digital audio format inserting a surround back (SB) channel to the DTS digital surround sound through matrix encoding. Decoding of conventional 5.1-channel audio signals is also possible according to the decoder.

DTS Express

DTS Express is an audio format supporting low bit rates (max. 5.1 channels, 24 to 256 kbps).

DTS-HD

This audio technology provides higher sound quality and enhanced functionality than the conventional DTS and is adopted as an optional audio for Blu-ray Disc. This technology supports multi-channel, high data transfer speed, high sampling frequency, and lossless audio playback. Maximum 7.1-channels are supported in Blu-ray Disc.

DTS-HD High Resolution Audio

DTS-HD High Resolution Audio is an improved version of the conventional DTS, DTS-ES and DTS 96/24 signals formats, compatible with sampling frequencies of 96 or 48 kHz and up to 7.1 channels of discrete digital sound. High data bit rate performance provides high quality sound. This format is fully compatible with conventional products, including conventional DTS digital surround 5.1-channel data.

DTS-HD Master Audio

DTS-HD Master Audio is a lossless audio format created by Digital Theater System (DTS). This format provides the facility to support up to 8 audio channels with a sampling frequency of 96kHz/24bit resolution and up to 6 audio channels with a sampling frequency of 192kHz/24bit resolution. It is fully compatible with conventional products, including conventional DTS digital surround 5.1-channel data.

DTS Neural Surround

DTS Neural Surround has been chosen as the surround sound format for XM Satellite Radio's "XM HD Surround", TV sports broadcasting, 7.1 games, Music Direct Internet streaming as well as leading FM/HD radio stations. It delivers the rich envelopment and discrete image detail of surround sound by unmasking the audio details, typically lost by other playback modes. Audiences will experience the deep ambience and subtle details of movies, music and games.

DTS NEO:6™ Surround

DTS NEO:6™ is a matrix decoding technology for achieving 6.1-channel surround playback with 2-channel sources. It includes "DTS NEO:6 Cinema" suited for playing movies and "DTS NEO:6 Music" suited for playing music.

Dynamic range

The difference between the maximum undistorted sound level and the minimum discernible level above the noise emitted by the device.

H

HDCP

When transmitting digital signals between devices, this copyright protection technology encrypts the signals to prevent content from being copied without authorization.

HDMI

This is an abbreviation of High-Definition Multimedia Interface, which is an AV digital interface that can be connected to a TV or amplifier. Video signal and audio signal can be connected using 1 cable.

L

LFE

This is an abbreviation of Low Frequency Effect, which is an output channel that emphasizes low frequency effect sound. Surround audio is intensified by outputting 20 Hz to 120 Hz deep bass.

M

MAIN ZONE

The room where this unit is placed is called the MAIN ZONE.

MP3 (MPEG Audio Layer-3)

This is an internationally standardized audio data compression scheme, using the "MPEG-1" video compression standard. It compresses the data volume to about one eleventh its original size while maintaining sound quality equivalent to a music CD.

MPEG (Moving Picture Experts Group), MPEG-2, MPEG-4

These are the names for digital compression format standards used for the encoding of video and audio. Video standards include "MPEG-1 Video", "MPEG-2 Video", "MPEG-4 Visual", "MPEG-4 AVC". Audio standards include "MPEG-1 Audio", "MPEG-2 Audio", "MPEG-4 AAC".

P

Pairing

Pairing is an operation required for settings to connect two Bluetooth devices. Pairing enables Bluetooth devices to access each other.

Protection Circuit

This is a function to prevent damage to components within the power supply when an abnormality such as an overload, excess voltage occurs or temperature for any reason.

In this unit, the power indicator blinks and the unit enters standby mode when an abnormality occurs.

S

Sampling frequency

Sampling involves taking a reading of a sound wave (analog signal) at regular intervals and expressing the height of the wave at each reading in digitized format (producing a digital signal).

The number of readings taken in one second is called the "sampling frequency". The larger the value, the closer the reproduced sound is to the original.

Speaker impedance

This is an AC resistance value, indicated in Ω (ohms). Greater power can be obtained with this value smaller.

sYCC601 color

Like x.v.Color, each of these color spaces defines a palette of available colors that is larger than the traditional RGB color model.

W

WAV (Wave)

WAV is a standard audio format of Windows. The file size tends to increase, but sound near the original sound can be maintained.

WMA (Windows Media Audio)

This is audio compression technology developed by Microsoft Corporation.

WMA data can be encoded using Windows Media® Player Ver.7, 7.1, Windows Media® Player for Windows® XP and Windows Media® Player 9 Series.

To encode WMA files, only use applications authorized by Microsoft Corporation. If you use an unauthorized application, the file may not work properly.

X

x.v.Color

This function lets HDTVs display colors more accurately. It enables display with natural, vivid colors. "x.v.Color" is a Sony registered trademark.

Z

ZONE2

This unit can operate in a room other than the room where this unit is placed (MAIN ZONE) (ZONE2 playback). The room for ZONE2 playback is called ZONE2.

Troubleshooting

If a problem should arise, first check the following:

1. Are the connections correct?

2. Is the set being operated as described in the user guide?

3. Are the other components operating properly?

If this unit does not operate properly, check the items listed in the table below. Should the problem persist, there may be a malfunction.

In this case, disconnect the power immediately and contact your store of purchase.

[General]

Symptom	Cause/Solution	Page
Power does not turn on.	<ul style="list-style-type: none"> Check whether the power plug is correctly inserted into the power outlet. The protection circuit is active. Disconnect the power plug from the electric outlet, wait 5 to 10 seconds and then insert it back into the outlet. 	5 4, 79
Display is off.	<ul style="list-style-type: none"> Set "Display" on the menu to something other than "OFF". 	61
The power indicator is blinking red in intervals of approximately 2 seconds.	<ul style="list-style-type: none"> The temperature inside the unit has risen. Please turn off power once, and re-apply the power after the temperature has fallen sufficiently. Please re-install this unit in a place having good ventilation. 	II II
The power indicator is blinking red in intervals of approximately 0.5 seconds.	<ul style="list-style-type: none"> Please use speakers which have the specified impedance. The speaker cable has shorted (is touching). Firmly twist the core wire in the speaker cable, and then re-connect it to the speaker terminal. 	4 4
After turning on the power, the power indicator is blinking red in intervals of approximately 0.5 seconds.	<ul style="list-style-type: none"> This unit amplifier circuit has failed. Turn off the power and please contact the Marantz service adviser. 	–
Set does not operate properly.	<ul style="list-style-type: none"> Reset the microprocessor. 	82

[Video]

Symptom	Cause/Solution	Page
No picture appears.	<ul style="list-style-type: none"> Check the TV connection. Set the TV input correctly. 	5 6
The on-screen display is not shown. Or noise occurs.	<ul style="list-style-type: none"> Set the on-screen display output mode to match your TV and connection method. 	62

[Audio]

Symptom	Cause/Solution	Page
Audio is not output.	<ul style="list-style-type: none"> Check the connections for all devices. Check the speaker connections. Check whether the audio device power is turned on. Adjust the master volume. Cancel the mute mode. Select a suitable input source. Select a suitable input mode. Disconnect the headphones. No sound is output from the speakers or the PRE OUT connectors when headphones are connected. 	5, 14 – 21 5, 34 – 36 – 22, 42 22, 42 22, 42 50 69
No sound is produced from surround speaker.	<ul style="list-style-type: none"> Check if the surround speakers are connected to the SURROUND terminals. 	–
No sound is produced from surround back speaker.	<ul style="list-style-type: none"> Set "Amp Assign" on the menu to "Normal". Set "Speaker Config." – "S.Back" on the menu to something other than "None". Set the surround mode to something other than "STEREO". 	56 57 29
No sound is produced from front height speaker.	<ul style="list-style-type: none"> Set "Amp Assign" on the menu to "Normal". Set "Speaker Config." – "Surround" on the menu to something other than "None". 	56 57
No sound is produced from subwoofer.	<ul style="list-style-type: none"> Check the subwoofer connections. Turn on the subwoofer's power. Set "Speaker Config." – "Subwoofer" on the menu to "Yes". If "Front" and "Center" for "Speaker Config." are set to "Large", and "Subwoofer Mode" is set to "LFE", no sound may be output from the subwoofers, depending on the input signal or selected surround mode. 	5, 34 – 36 6 56 56, 57
DTS sound is not output.	<ul style="list-style-type: none"> Set "Decode Mode" on the menu to "Auto" or "DTS". 	50
Dolby TrueHD, DTS-HD, Dolby Digital Plus audio is not output.	<ul style="list-style-type: none"> Make HDMI connections. 	15

[HDMI]

Symptom	Cause/Solution	Page
No audio is output with HDMI connection.	<ul style="list-style-type: none"> • Check the connection of the HDMI connectors. • When outputting HDMI audio from the speakers, set "HDMI Audio Out" on the menu to "Amp". • When outputting HDMI audio from a TV, set "HDMI Audio Out" on the menu to "TV". 	15 58 58
No video is output with HDMI connection.	<ul style="list-style-type: none"> • Check the connection of the HDMI connectors. • Set the input source to match the connected HDMI connector. • Check whether the TV is compatible with copyright protection (HDCP). If connected to a device not compatible with HDCP, video will not be output correctly. 	15 15, 22, 48 14
When the following operations are performed on devices compatible with HDMI control, the same operations occur on this unit. • Power ON/OFF • Switching audio output devices • Adjust volume • Switch input source	<ul style="list-style-type: none"> • Set "HDMI Control" on the menu to "OFF". To operate power only for each device, set "Power Off Control" to "OFF". 	39, 58

[SIRIUS Satellite Radio]

Symptom	Cause/Solution	Page
"CHECK SR TUNER" is displayed.	<ul style="list-style-type: none"> • The SiriusConnect Home Tuner unit is not connected. Check that the connections are correct. 	20
"ANTENNA ERROR" is displayed.	<ul style="list-style-type: none"> • The antenna is not connected. Check that the connections are correct. 	20
"INVALID CHANNEL" is displayed.	<ul style="list-style-type: none"> • Channel is not present. Select another channel. 	—
"ACQUIRING SIGNAL" is displayed.	<ul style="list-style-type: none"> • The signal cannot be received. Reposition your SiriusConnect Home Tuner and Home Dock antenna. • Displays while SiriusConnect Home Tuner is connected. Reposition your SiriusConnect Home Tuner and Home Dock antenna. 	— —
"Call SIRIUS" * is displayed.	<ul style="list-style-type: none"> • Channels are not subscribed to. If you subscribe to the channel, you can receive the channel. 	—
"SUBSCRIPTION UPDATED" is displayed.	<ul style="list-style-type: none"> • While updating contract information. 	—
"Enter Lock Code []" is displayed.	<ul style="list-style-type: none"> • Selected channels are locked. Please insert pass word (4 digits) into "[]" 	—

* After scroll displays "Call 888-539-...." twice, displays "Call SIRIUS".

[FM/AM radio]

Symptom	Cause/Solution	Page
Reception fails, or there is a lot of noise or distortion.	<ul style="list-style-type: none"> • Change the antenna orientation or position. • Separate the AM loop antenna from the unit. • Use an FM outdoor antenna. • Separate the antenna from other connection cables. 	20 20 20 20

[USB memory device]

Symptom	Cause/Solution	Page
When a USB memory device is connected, "USB" is not displayed on the menu.	<ul style="list-style-type: none"> • The set cannot recognize a USB memory device. Check the connection. • A USB memory device not conforming to mass storage class is connected. Connect a USB memory device conforming to mass storage class. • A USB memory device cannot be connected via a USB hub. 	19 — 19
Files on a USB memory device cannot be played.	<ul style="list-style-type: none"> • Set the USB memory device format to "FAT16" or "FAT32". For details, refer to the USB memory device's operating instructions. • If the USB memory device is divided into multiple partitions, only files stored in the top partition can be played. • The file is recorded in an incompatible format. Please record it in a compatible format. • This unit cannot play back files covered by copyright protection. 	— — — —
The file names are not displayed properly ("...", etc.).	<ul style="list-style-type: none"> • Characters that cannot be displayed on this unit are replaced by "." (period). 	23
The sound quality is poor or there is noise during playback.	<ul style="list-style-type: none"> • The file being played back has a low bit rate. 	—
"Connection Error" is displayed.	<ul style="list-style-type: none"> • Unable to communicate properly. Turn off the power to this unit, unplug the USB memory device and then plug it back in. • The USB memory device is not responding. Turn off the power to this unit, unplug the USB memory device and then plug it back in. 	— —
"Overcurrent" is displayed.	<ul style="list-style-type: none"> • The USB memory device is consuming too much power. When using a USB portable hard disk that can be powered by an AC adapter, connect its AC adapter. 	—

[iPod]

Symptom	Cause/Solution	Page
iPod cannot be played.	<ul style="list-style-type: none"> Check the iPod connections. Switch the input source to "USB". Incompatible iPod types cannot be played back. 	19 22 19
"Connection Error" is displayed.	<ul style="list-style-type: none"> Unable to communicate properly. Turn off the power to this unit, disconnect the iPod and then reconnect it. 	–
"Not Support" is displayed.	<ul style="list-style-type: none"> The iPod connected to the unit is not compatible. Please make sure the iPod you are connecting is compatible. The software version of the connected iPod is an old one. Please update to the latest version. 	19 –
"Connection Error" is displayed.	<ul style="list-style-type: none"> The iPod is not responding. Turn off the power to this unit, disconnect the iPod and then reconnect it. 	–
When an iPod is connected, "No Connection" is displayed.	<ul style="list-style-type: none"> "No Connection" may display if you connect an iPod that has only a small amount of charge remaining in its battery to this unit. Should this occur, charge the iPod before connecting it to this unit. 	–

[M-XPort]

Symptom	Cause/Solution	Page
Audio is not output when a wireless receiver (RX101 is connected).	<ul style="list-style-type: none"> Check that the Bluetooth device and Wireless receiver (RX101) are correctly paired. 	–

[Remote control unit]


Symptom	Cause/Solution	Page
The set cannot be operated with the remote control unit.	<ul style="list-style-type: none"> Batteries are worn out. Replace with new batteries. 	72
	<ul style="list-style-type: none"> Operate the remote control unit within a distance of about 23 ft/7 m from this unit and at an angle of within 30°. 	72
	<ul style="list-style-type: none"> Remove any obstacle between this unit and the remote control unit. 	72
	<ul style="list-style-type: none"> Insert the batteries in the proper direction, checking the ⊕ and ⊖ marks. 	72
	<ul style="list-style-type: none"> The set's remote control sensor is exposed to strong light (direct sunlight, inverter type fluorescent bulb light, etc.). Move the set to a place in which the remote control sensor will not be exposed to strong light. 	72

Resetting the microprocessor

Perform this procedure if the display is abnormal or if operations cannot be performed. When the microprocessor is reset, all the settings are reset to their default values. Various setting details can be saved and reset on this device. If setting details are saved before returning to the default values, after returning to the default settings, setting details can be returned to the same values as before returning to the defaults.



To return all of the settings to the default values, perform steps 2 to 4 without performing step 1.

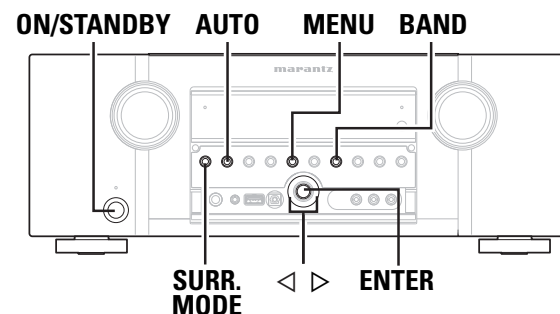

- 1 When the power is ON, press and hold BAND and ENTER for more than 3 seconds.**
After "MEMORY SAVING" is shown on the display, "COMPLETE" is shown to inform you that the settings have been saved.
- 2 Turn off the power using ON/STANDBY.**
- 3 Press ON/STANDBY while simultaneously pressing SURR. MODE and AUTO.**
- 4 Once the display starts flashing at intervals of about 1 second, release the two buttons.**
- 5 Press and hold MENU and BAND for more than 3 seconds.**
After "MEMORY LOAD" is shown on the display, "COMPLETE" is shown to inform you that the settings have returned to those saved in step 1.



If in step 4 the display does not flash at intervals of about 1 second, start over from step 2.

Specifications

Audio section

- Power amplifier
Rated output:

Front:
100 W + 100 W (8 Ω, 20 Hz – 20 kHz with 0.08 % T.H.D.)
180 W + 180 W (6 Ω, 1 kHz with 10 % T.H.D.)

Center:
100 W (8 Ω, 20 Hz – 20 kHz with 0.08 % T.H.D.)
180 W (6 Ω, 1 kHz with 10 % T.H.D.)

Surround:
100 W + 100 W (8 Ω, 20 Hz – 20 kHz with 0.08 % T.H.D.)
180 W + 180 W (6 Ω, 1 kHz with 10 % T.H.D.)

Surround Back:
100 W + 100 W (8 Ω, 20 Hz – 20 kHz with 0.08 % T.H.D.)
180 W + 180 W (6 Ω, 1 kHz with 10 % T.H.D.)
6 – 8 Ω (SPEAKER A + B : 8 Ω)

Output connectors:

- Analog
Input sensitivity/Input impedance:
Frequency response:
S/N:

165 mV/50 kΩ
10 Hz – 100 kHz — ±3 dB (Source Direct mode)
98 dB (IHF-A weighted, Source Direct mode)

Video section

- Standard video connectors

Input/output level and impedance:
Frequency response:

1 Vp-p, 75 Ω
5 Hz – 10 MHz — +1, –3 dB

- Color component video connector
Input/output level and impedance:

Y (brightness) signal — 1 Vp-p, 75 Ω
P_B / C_B signal — 0.7 Vp-p, 75 Ω
P_R / C_R signal — 0.7 Vp-p, 75 Ω
Frequency response:
5 Hz – 60 MHz — +0, –3 dB

Tuner section

[FM]

[AM]

Receiving Range:

(Note: μV at 75 Ω, 0 dBf = 1 × 10⁻¹⁵ W)

Usable Sensitivity:

87.5 MHz – 107.9 MHz

520 kHz – 1710 kHz

50 dB Quietening Sensitivity:

1.2 μV (12.8 dBf)

18 μV

S/N (IHF-A):

MONO 2.8 μV (20.2 dBf)

MONO 70 dB

STEREO 67 dB

Total harmonic Distortion (at 1 kHz):

MONO 0.7 %

STEREO 1.0 %

General

- Power supply:
Power consumption:

AC 120 V, 60 Hz

650 W

0.2 W (Standby)

3 W (CEC standby)

Maximum external dimensions:

440 (W) x 161 (H) x 389 (D) mm

Weight:

11.6 kg

Remote control unit (RC010SR)

- Batteries:

R03/AAA Type (two batteries)

For purposes of improvement, specifications and design are subject to change without notice.

Index

Numerics

2.1-channel	33, 36
3D	14
5.1-channel	33, 35
6.1-channel	33, 34
7.1-channel	4, 33, 34

A

A2DP	18, 78
Accessories	1
Adjust CH	55
Adobe RGB color / Adobe YCC601 color	78
AM loop antenna	20
Amp Assign	56
Antenna Aiming	47
ARC	15
Aspect	50
Audio Adjust	52
Audio cable	5, 16, 17, 18, 21
Audio Delay	55
Audio Setup	59
Audyssey Auto Setup	6, 37
Audyssey Dynamic EQ	54, 78
Audyssey Dynamic Volume	54, 78
Audyssey MultEQ	53, 69, 78
Audyssey Settings	53
Auto Lip Sync	58, 78
Auto Preset	47
Auto Setup	6, 37

B

Base Curve Copy	55
Bass	53, 59
Bass Setting	57
Bi-amp	36
Bluetooth	18, 78

C

Cable	
Audio cable	5, 16, 17, 18, 21
Coaxial digital cable	16, 17
Component video cable	16, 17
HDMI cable	5, 15
Optical cable	16, 18
Speaker cable	5
Video cable	16, 17, 18
Center Image	52
Center Width	52
Channel	59

Channel Level	58
Characters	45
Coaxial digital cable	16, 17
Component video cable	16, 17
Condensation	2
Connection	
7.1CH INPUT	21
Antenna	20
Blu-ray Disc player	5, 15, 16
Cable TV	17
CD player	18
DC OUT (TRIGGER OUT)	38
Digital camcorder	18
DVD player	15, 16
External power amplifier	21
Game console	15
HDMI	14
iPod	19
Power cord	5
REMOTE CONTROL	38
RS-232C	38
Satellite tuner	17
Set-top box	15, 17
SIRIUS	20
Speaker	4, 34
TV	5, 15, 16
USB memory device	19
Video cassette recorder	17
Wireless receiver	18
Crossover Freq.	58

D

D.Comp	52
DC Trigger	61
Decode Mode	50
Deep Color	14, 78
Dimension	52
Direct mode	23
Display	61, 69
Distance	57
Dolby	
Dolby Digital	30, 78
Dolby Digital EX	30, 78
Dolby Digital Plus	30, 78
Dolby Headphone	31, 78
Dolby Pro Logic II	78
Dolby Pro Logic IIx	78
Dolby Pro Logic IIz	33, 78
Dolby TrueHD	30, 78
Dolby Virtual Speaker	31, 78
Downmix	78
DRC	52

DTS	30, 78
DTS 96/24	30, 79
DTS-ES Discrete 6.1	30, 79
DTS-ES Matrix 6.1	30, 79
DTS-HD	30, 79
DTS-HD High Resolution Audio	79
DTS-HD Master Audio	79
DTS Digital Surround	79
DTS Express	79
DTS NEO:6™ Surround	29, 79
DTS Neural Surround	29, 79
Dynamic EQ	54
Dynamic range	79
Dynamic Volume	54

E

EQ Customize	59
Error messages (Auto Setup)	10

F

FM indoor antenna	20
Front A/B (connection)	35
Front Height	57
Front height speaker	33, 34
Front Panel	69
Front Speaker Setup	58

H

HDCP	14, 79
HDMI	14, 79
HDMI 1.4a	14, 15
HDMI Audio Out	58
HDMI cable	5, 15
HDMI Control	39, 58
HDMI Setup	58
Headphones	69
Height Gain	53
HPF	59
HT-EQ	52

I

Information	61
Audio Input Signal	61
HDMI Information	61
Preset Channel	61
Status	61
Input Assign	48
Input Mode	50
Input Setup	46
Input signal	30, 76
i/p Scaler	49

L

Learn mode	66
Level Lch	59
Level Rch	59
LFE	52, 79
Listening mode	29
Listening position	7

M

MAIN ZONE	41, 79
Manual EQ	55
Manual Setup	56
Master volume display	60
M-DAX	55
Menu map	43
MP3	79
MPEG	79
MPEG-4 AAC	79
MultEQ	53
Mute Level	60
M-XPoort	18

O

On-Screen Display	60
Output mode	62
Optical cable	16, 18
Option Setup	60
DC Trigger	61
Display	61
On-Screen Display	60
Setup Lock	61
Source Delete	60
Volume Control	60
Zone Rename	60

P

Pairing	79
Panel lock function	41
Panorama	52
Parameter Check	10
Parental Lock	47
Playback	
Blu-ray Disc player	23
CD player	23
Direct	31
DVD player	23
FM/AM broadcasts	25
iPod	23
MP3	24
MPEG-4 AAC	24
Multi-channel	29
SIRIUS	25

Stereo	31
USB memory device	24
WMA	24
ZONE2	42
Playback Mode	51
Power Off Control	59
Power On Level	60
Preset codes	63
Preset Name	48
Preset Skip	47
Presetting radio stations	27
Progressive Mode	50
Protection circuit	79

R

Rear panel	70
Reference Level Offset	54
Remote control unit	63, 71
Inserting the batteries	72
Operating components	65
Registering Preset Codes	63
Remote mode	23
Rename	51
Repeat	51
Resetting the microprocessor	82
Resolution	49

S

Sampling frequency	79
S.Back	57
Screensaver	60
Selecting the input source	22
Setup Lock	61
Shuffle	51
SIRIUS	20, 25
Sleep timer	40
Source Delete	60
Source Level	51
Speaker	
Connect	4, 34
Install	4, 33
Set up	6, 37
Speaker cable	5
Speaker Config	56
Speaker impedance	4, 79
Speaker Setup	56
Standby Source	59
Subwoofer setting	7
Surround back speaker	4, 33, 34
Surround Mode	29, 74
Surround Parameter	52
sYCC601 color	79

T

Tone	53
Tone Control	53
Trademark	73
Treble	53, 59
Turn off power (standby)	11
Turn on power	6

V

Video	49
Video cable	16, 17, 18
Video conversion	13
Video Mode	49
Video Select	49
Volume Control	60
Volume Level	59
Volume Limit	59, 60

W

WAV	79
WMA	79

X

x.v.Color	79
-----------------	----

Z

ZONE2	41, 79
ZONE2 Setup	59
Zone Rename	60

Device select : BD

Blu-ray Disc Player

D	Denon	5034, 5035, 5036
H	Hitachi	5031, 5032, 5033
I	Integra	5013
J	JWC	5014, 5015, 5017, 5018, 5019, 5020
L	LG	5010, 5011
M	Marantz	5000, 5026, 5027
	Mitsubishi	5024, 5025
O	Onkyo	5013
P	Panasonic	5001, 5002, 5003
	Philips	5004
	Pioneer	5005
R	RCA	5012
S	Samsung	5005
	Sharp	5028, 5029, 5030
	Sony	5007, 5008, 5009, 5016
T	Toshiba	5012
Y	Yamaha	5021, 5022, 5023

Device select : DVD

DVD Player

A	Aiwa	2036, 2037
	Apex	2012, 2017, 2018, 2019, 2021, 2034
B	BOSE	2038, 2039, 2063
D	Denon	2047, 2048
F	Funai	2049
G	GE	2009, 2020, 2029, 2033
H	Harman Kardon	2061
	Hitachi	2008, 2012, 2031
J	JVC	2006, 2010, 2040, 2041, 2042, 2043
K	Kenwood	2053, 2054
	Koss	2058
M	Magnavox	2007, 2011, 2023, 2025
	Marantz	2025, 2065
	Marantz (Blu-ray)	2064
	Mitsubishi	2011, 0215
O	Onkyo	2062
	Oritron	2009, 2030
P	Panasonic	2003, 2015, 2016, 2055
	Philips	2007, 2011, 2058
	Pioneer	2002, 2014, 2056
	Proscan	2009, 2020, 2032
R	RCA	2005, 2009, 2020, 2035, 2057
S	Sampo	2041

	Samsung	2008, 2012, 2022, 2024, 2027
	Sanyo	2050, 2052
	Sharp	2044, 2045
	Sherwood	2051
T	Sony	2001, 2013, 2059
Y	Toshiba	2004, 2008, 2026, 2028
Z	Yamaha	2046, 2060
	Zenith	2010

Device select : SAT

Satellite Receiver

A	Alphastar	4027
	Amstrad	4046, 4047, 4050
	Atsky	4048
B	B Sky B	4021, 4045, 4046
C	Chaparral	4039
D	DIRECTV	4001, 4016, 4044
	DISH Network	4030
	Drake	4026
E	Echostar	4007, 4017, 4018, 4019, 4020, 4062, 4063, 4064
	Eurosky	4047, 4056
	Express Vu	4017
F	Foxtel	4051
	Freesat	4056
	Fujitsu	4025
G	GE	4002, 4008, 4009
	General Instruments	4036, 4037
	Gradiente	4044, 4057
H	Hitachi	4001, 4015
	Hughes	4001, 4016
	Humax	4049, 4050, 4051, 4052, 4053
J	Janeil	4025
	JVC	4017
M	Mitsubishi	4001
N	Nokia	4058, 4059, 4060, 4061
O	Optima	4048
P	Panasonic	4004, 4010
	Philips	4031, 4035, 4044, 4057
	Proscan	4002, 4008, 4009, 4011
R	Radio Shack	4036, 4037
	RCA	4002, 4008, 4009, 4029
	Realistic	4040
	Rural Cable	4036
S	Samsung	4022, 4027, 4042, 4043, 4050, 4054, 4055
	Schneider	4041, 4043
	SKY	4044, 4045, 4057
	Skyplus	4048
	Skysat	4041, 4047, 4056

	Sony	4003, 4012, 4014, 4065, 4066, 4067
	Star Choice	4032
	Star Trak	4024
	STS	4038
	SuperDish	4028
T	Teac	4049
	Thomson	4046, 4056
	Toshiba	4001, 4034
U	Uniden	4005, 4006, 4013
	Universum	4056
V	Video Pall	4025
Z	Zenith	4023, 4025, 4033

Device select : TV

Television

A	Acer	1141
	Admiral	1002, 1009, 1089
	Aiko	1059
	Aiwa	1117, 1118
	Akai	1001
	Amtron	1023
	Anam	1113
	Anam National	1023, 1069, 1092
	AOC	1003, 1024, 1049, 1127
	Audiovox	1023
B	Bell & Howell	1009, 1025
	Benq	1104, 1142
	Broksonic	1003, 1097, 1098, 1113
C	Celebrity	1001
	Citizen	1003, 1013, 1023, 1026, 1059, 1063
	Colortyme	1003, 1043
	Contec	1113
	Contec/Cony	1023, 1045, 1047
	Craig	1020, 1022, 1023, 1113
	Crown	1023, 1067
	Curtis Mathes	1003, 1013, 1025, 1026, 1062, 1103, 1110
D	Daewoo	1003, 1013, 1024, 1035, 1036, 1059, 1084, 1101
	Daytron	1003, 1013, 1016
	Dimensia	1103, 1110
	Dumont	1003, 1010, 1153
E	Electroband	1001
	Electrohome	1001, 1003, 1069, 1133
	Emerson	1003, 1013, 1015, 1020, 1021, 1022, 1023, 1025, 1038, 1044, 1045, 1048, 1055, 1061, 1094, 1096, 1099, 1101, 1113
	Envision	1003
F	Fisher	1025, 1051, 1091, 1160

	Fujitsu	1038, 1124, 1125, 1155
	Funai	1023, 1038, 1113
G	Gateway	1150
	GE	1003, 1018, 1022, 1046, 1054, 1069, 1085, 1103, 1110, 1113, 1133, 1136, 1153
	Goldstar	1003, 1013, 1024, 1030, 1045, 1080, 1100, 1112, 1154
H	Hallmark	1003
	Hisense	1116
	Hitachi	1003, 1012, 1031, 1032, 1037, 1041, 1045, 1047, 1065, 1068, 1082, 1088, 1094, 1139, 1140, 1145, 1159
I	Inf nity	1067
J	Janeil	1134
	JBL	1067
	JC Penney	1003, 1013, 1018, 1019, 1024, 1026, 1046, 1047, 1054, 1063, 1083, 1085, 1100, 1103, 1110, 1112, 1133, 1154
	Jensen	1003
	JVC	1028, 1029, 1045, 1047, 1050, 1060, 1065
K	Kawasho	1001, 1003
	Kenwood	1003
	Kloss Novabeam	1023, 1056, 1057, 1134
	KTV	1013, 1023, 1033, 1034, 1073, 1099, 1113
L	LG	1024, 1030
M	M.Wards	1002, 1009, 1038
	Magnavox	1003, 1052, 1053, 1056, 1057, 1063, 1067, 1081, 1106
	Marantz	1003, 1031, 1067, 1122
	Mitsubishi	1003, 1024, 1051, 1115, 1122, 1133
	Motorola	1014, 1069
N	NEC	1003, 1012, 1024, 1043, 1069
	NET-TV	1137, 1150
O	Orion	1020, 1096
P	Panasonic	1017, 1067, 1069, 1095, 1111
	Philips	1003, 1011, 1045, 1052, 1054, 1056, 1057, 1058, 1063, 1067, 1069, 1106
	Pioneer	1003, 1018, 1037, 1070, 1071, 1094, 1145, 1147, 1149
	Plasmsync	1135
	Portland	1003, 1013, 1024, 1059
	Price Club	1026
	Prism	1018
	Proscan	1004, 1005, 1006, 1007, 1008, 1085, 1103, 1110
	Proton	1003, 1045
Q	Quasar	1010, 1069, 1073, 1111, 1153

R	Radio Shack	1003, 1013, 1015, 1023, 1024, 1025, 1045, 1100, 1103, 1110, 1113
	RCA	1003, 1004, 1005, 1006, 1007, 1008, 1014, 1024, 1049, 1069, 1075, 1079, 1085, 1087, 1088, 1093, 1094, 1101, 1103, 1110, 1113, 1153
	Realistic	1013, 1015, 1023, 1025, 1045, 1100, 1103, 1110
	Runco	1010, 1153
S	Sampo	1150
	Samsung	1003, 1013, 1024, 1026, 1040, 1045, 1062, 1078, 1083, 1090, 1100, 1105, 1114, 1120, 1121, 1146, 1148, 1157
	Sansui	1119
	Sanyo	1003, 1025, 1051, 1072, 1077, 1091, 1156, 1157, 1158
	Sharp	1003, 1013, 1014, 1015, 1045, 1055, 1064, 1066, 1076, 1089, 1123
	Signature	1009
	Sony	1001, 1102, 1108
	Soundesign	1003, 1023, 1038, 1063, 1113
	Starlite	1023
	Supre-Macy	1134
	Sylvania	1003, 1039, 1042, 1052, 1053, 1056, 1057, 1063, 1067, 1089, 1151
	Symphonic	1023, 1039, 1044
T	Tandy	1014
	Tatung	1069
	Technics	1018
	Techwood	1003, 1018
	Teknika	1003, 1009, 1013, 1023, 1024, 1026, 1038, 1045, 1047, 1059, 1063, 1111, 1113
	Telecaption	1074
	Toshiba	1003, 1019, 1025, 1026, 1042, 1074, 1098, 1107, 1111, 1135, 1136
	Totevision	1013
U	Universal	1046, 1054
V	Video Concepts	1113
	Viewsonic	1006, 1022, 1109, 1128, 1129, 1130, 1131, 1138, 1143, 1145, 1150
W	Wards	1003, 1009, 1015, 1024, 1038, 1044, 1046, 1052, 1054, 1056, 1057, 1067, 1086, 1103, 1110
	White Westinghouse	1001, 1101
Y	Yamaha	1003, 1024
Z	Zenith	1003, 1009, 1010, 1132, 1144, 1153


Device select : CD

CD Player

A	AIWA	3001, 3002, 3003
	AKAI	3004, 3005, 3006
	AUDIO	3007
	AUDIO LABS	3008
C	CALIFORNIA	3008
	CARVER	3010, 3011, 3009
	CASIO	3012, 3020
	CURTIS	3020, 3012
D	DENON	3013
E	EMERSON	3014
F	FISHER	3011, 3015, 3016, 3017, 3018
	GE	3019
G	GENEXXA	3014, 3021, 3020
	HARMON	3022, 3023, 3051
H	HITACHI	3020
	INKEL	3024
J	JC PENNEY	3012, 3020, 3025
	JVC	3026, 3027
K	KARDON	3022, 3051, 3023
	KRELL	3010
L	LUXMAN	3035, 3036, 3037, 3038
	LX I	3012, 3020, 3014
M	MAGNAVOX	3010, 3039, 3040
	MARANTZ	3010, 3041, 3042, 3043
	MATHES	3012, 3020
	MCS	3012, 3020
	MGA	3023
	MISSION	3010
N	MITSUBISHI	3023, 3044
	NAD	3034, 3045
	NAKAMICHI	3046, 3047, 3048
	NEC MCS	3025
O	NIKKO	3007, 3016
	ONKYO	3049, 3050, 3051, 3052, 3055, 3102, 3103
	OPTIMUS	3011, 3014, 3020, 3028, 3053, 3054, 3056, 3057, 3058, 3059
P	PANASONIC	3008, 3060, 3061
	PHILIPS	3009, 3010, 3010, 3040
	PIONEER	3020, 3021, 3062, 3063, 3064
Q	QUASAR	3008
R	RCA	3011, 3014, 3065, 3066, 3067, 3068, 3069
	REALISTIC	3011, 3014, 3020, 3042, 3054, 3057
	ROTEL	3010
	RS ORIGINAL	3070
S	SAE	3010, 3083

SAMSUNG	3071
SANSUI	3014, 3068, 3072, 3073
SANYO	3011, 3018, 3074, 3075, 3076
SCOTT	3014
SEARS	3012, 3014, 3020, 3028, 3042
SHARP	3028, 3042, 3077
SHERWOOD	3042, 3056, 3070, 3078, 3024
SHURE	3025
SONY	3039, 3079, 3080, 3081, 3082, 3097, 3098, 3099, 3100, 3101
SYLVANIA	3010
SYMPHONIC	3083
TEAC	3016, 3042, 3057, 3083, 3084, 3085, 3086
TECHNICA	3007, 3008, 3061, 3087, 3088
THETA DIGITAL	3040
TOSHIBA	3045
VICTOR	3026
YAMAHA	3007, 3089, 3090, 3091, 3092
ZENITH	3016, 3093, 3094, 3095, 3096

Dimensions / Dimensions / Dimensions

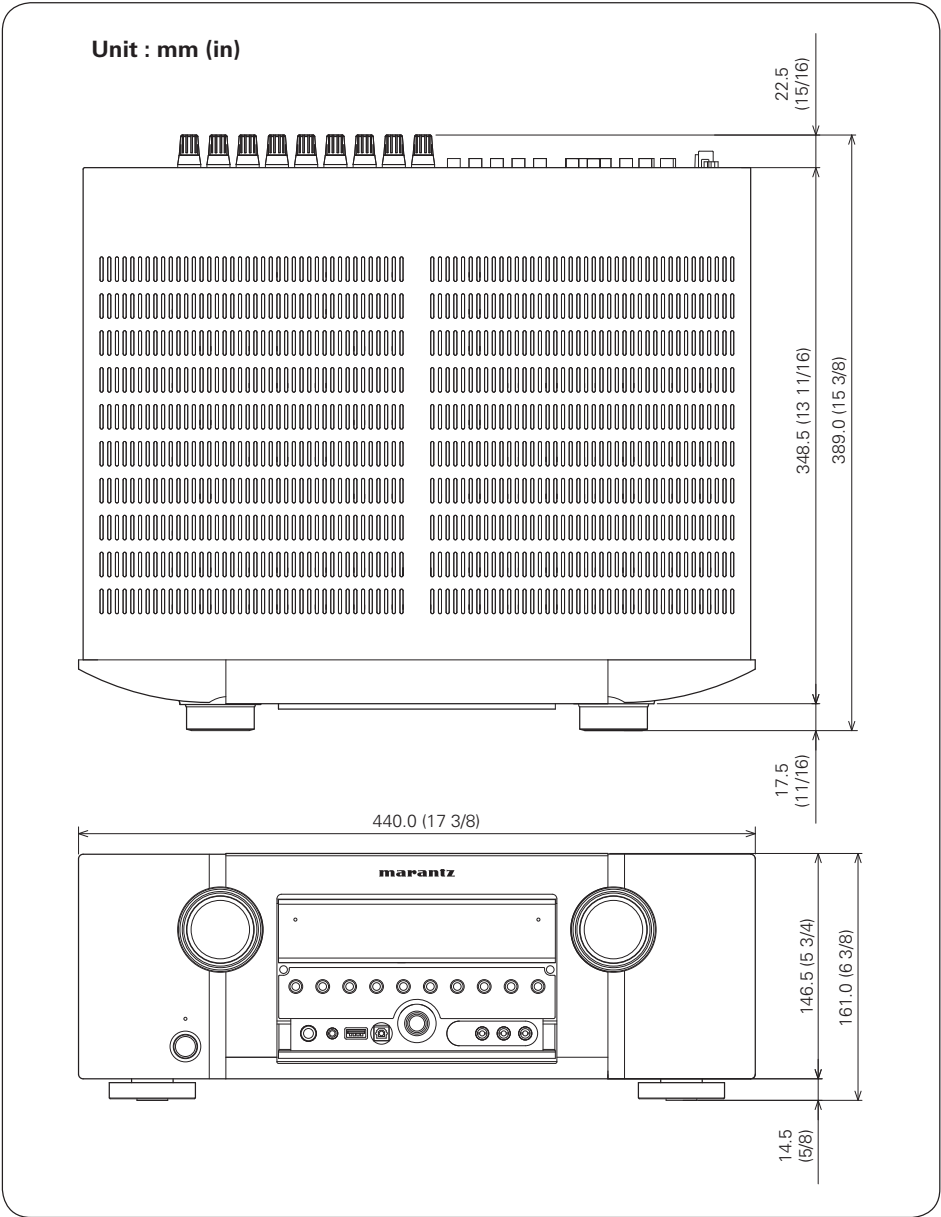

www.marantz.com

You can find your nearest authorized distributor or dealer on our website.

marantz® is a registered trademark.

For CANADA

marantz®

MARANTZ CANADA LIMITED WARRANTY

Marantz Canada ("Marantz") warrants the following Marantz products for the periods indicated:

3-year warranty for both Parts & Labour, from the original purchase date :

Amplifiers; Pre Amplifiers; Pre Amplifier-Processor-Tuners; Integrated Amplifiers; Tuners; Receivers; Blu-ray DVD Super Audio CD/CD Players/Changers; Learning Remote Control Devices; iPod Docks & DLP front Projectors.

90 day warranty for parts and labour from the original purchase date :

DLP lamps

What is Covered and What is Not Covered

Except as specified below, this warranty covers parts and labor to correct all defects in materials and workmanship. The following are not covered by the warranty:

1. Damage, deterioration, malfunction or failure to meet performance specifications resulting from:
 - a) Accident; acts of nature; misuse; abuse; neglect; unauthorized product modification.
 - b) Improper installation, removal or maintenance, or failure to follow instructions supplied with the product.
 - c) Repair or attempted repair by anyone not authorized by Marantz to repair the product.
 - d) Any shipment of the product (claims must be presented to the carrier)
 - e) Any cause other than a product defect
2. Cleaning, initial set-up, check-ups with no defects found, or charges incurred for installation, removal or reinstallation of the product.
3. Any product on which the serial number has been defaced, modified or removed.
4. Accessories, including but not limited to, batteries, cables, mounting hardware and brackets, cleaning accessories, antenna and detachable power cords.
5. Warranty is void if purchase was made from anyone other than an authorized Marantz dealer.

Who May Enforce the Warranty

Only the original purchaser may enforce this warranty.

What We Will Pay For

We will pay for all labor and material expenses for items covered by the warranty. Payment of shipping charges is discussed in the next section of this warranty.

How You Can Get Service

1. If your unit needs service, please first contact your dealer to see what support services they do offer. You can also contact one of our Authorized Marantz Service Centers as per our website <http://ca.marantz.com/162.asp> or contact us directly as below. Please do not return your unit to the factory without prior authorization.
2. You must pay any shipping charges if it is necessary to ship the product for service. However, if the necessary repairs are covered under warranty, we will pay the return shipping charges to any destination within Canada.
3. Whenever warranty service is required, you must present the original dated sales receipt or other proof of date of purchase.

Limitation of Implied warranties

All implied warranties, including warranties of merchantability and fitness for a particular purchase, are limited in duration to the length of this warranty.

Exclusion of damages

Marantz liability for any defective product is limited to repair or replacement of the product at Marantz's option. Marantz shall not be liable for damage to other products caused by any defects in Marantz products, damages based upon inconvenience or loss of use of the product, or any other damages, whether incidental, consequential, or otherwise.

Some provinces do not allow limitations on how long an implied warranty lasts and/or does not allow the exclusion of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

This warranty gives you specific legal rights, but you may also have other rights, which vary from province to province.

MARANTZ Canada

Division of D&M Canada Inc.
5-505 Apple Creek Blvd.,
Markham, Ontario
L3R 5B1
1-888-258-9361
www.marantz.com

marantz®

GARANTIE LIMITÉE DE MARANTZ CANADA

Marantz Canada ("Marantz") garantie les produits suivants pour les périodes indiquées :

3 ans de garantie pour les pièces et la main d'œuvre prenant effet à partir de la date d'achat du produit :

Amplificateurs, Préamplificateurs, Pré-ampli-processeurs-sintoniseurs; amplificateurs intégrés, sintoniseurs, récepteurs, Blu-ray DVD Super Audio CD/Lecteur CD/Changeur, télécommandes programmables, Docks iPod et projecteurs avant DLP.

90 jours de garantie pour les pièces et la main d'œuvre prenant effet à partir de la date d'achat du produit :

Lampes DLP

Ce qui est couvert et pas couvert par la garantie :

A l'exception de ce qui est mentionné ci-dessous, cette garantie couvre les pièces et la main d'œuvre afin de réparer tous les défauts de matériel ou de fabrication du produit. Ce qui suit n'est pas couvert par la garantie :

1. Les dommages, détérioration, défauts de fonctionnement, ou le fait de ne pas respecter les spécifications d'exécutions résultant d'un (e) :
 - a) accident, acte de la nature, abus, négligence, utilisation impropre ou d'une modification de produit non autorisée ;
 - b) installation incorrecte, déplacement, maintenance ou d'un emploi contraire aux instructions fournies avec le produit ;
 - c) réparations ou tentatives de réparations par une personne non reconnue par Marantz ;
 - d) envoi de produit (les réclamations doivent être présentées au transporteur)
 - e) cause autre qu'un défaut de produit.
2. L'entretien, l'installation initiale, toute vérification de produit ou aucun défaut n'a été trouvé, ou tous frais encourus pour l'installation, le déplacement ou la réinstallation du produit.
3. Tout produit dont le numéro de série a été effacé, modifié ou enlevé.
4. Les accessoires incluant mais non limités aux, piles, câbles, matériaux de support, accessoires de nettoyage, antennes et cordons de secteur détachables.
5. La garantie n'est pas valable si l'achat a été fait au Canada chez un revendeur non reconnu par Marantz.

Qui peut faire appliquer la garantie

Seule la personne qui a acheté le produit à l'origine peut faire appliquer la garantie.

Notre paiement

Nous paierons tous les frais de pièces et de main d'œuvre pour tous les produits couverts par la garantie. Le paiement des frais de livraison est abordé dans la section suivante de cette garantie.

Comment obtenir du service

1. Si votre produit Marantz requiert du service, communiquez premièrement avec votre revendeur autorisé afin de connaître s'il peut procéder au service de votre appareil. Vous pouvez aussi consulter la liste des centres de service autorisés sur notre site web au <http://ca.marantz.com/162.asp> ou contactez nous directement aux coordonnées ci-dessous. Veuillez ne pas retourner votre appareil chez le manufacturier sans autorisation obtenue préalablement.
2. Vous devez payer les frais de livraison dans le cas où votre appareil a besoin d'être envoyé au service des réparations. Toutefois, si les réparations nécessaires sont couvertes par la garantie, nous payerons les frais de retour d'expédition et ce quelle que soit la destination au Canada.
3. Lorsque vous envoyez votre appareil pour un service sous garantie, vous devez joindre une copie de la facture d'achat (ticket ou autre preuve d'achat)

Limites des garanties implicites

Toutes les garanties implicites, y compris les garanties de valeur marchande et spécifique pour un achat particulier, sont limitées dans la durée à la longueur de cette garantie.

Exclusion des dommages

La responsabilité de Marantz est limitée pour n'importe quel produit défectueux en ce qui concerne la réparation ou le remplacement du produit en question. Si des dommages interviennent à des produits autres que ceux de Marantz, Marantz ne sera pas tenu responsable des dits dommages, basés sur le dérangement ou la perte d'utilisation du produit ou tout autre dommage qu'il soit fortuit, indirect ou autre.

Certaines provinces ne permettent pas de limites quant à la durée d'une garantie sous-entendue et/ou ne permettent pas l'exclusion de dommages fortuits ; ainsi les limitations et les exclusions mentionnées ci-dessus peuvent ne pas s'appliquer à votre cas.

Cette garantie vous donne des droits légaux spécifiques, mais vous pouvez aussi avoir d'autres droits qui peuvent varier d'une province à l'autre.

Cette garantie n'est seulement valable qu'au Canada.

MARANTZ Canada

Division of D&M Canada Inc.
5-505 Apple Creek Blvd.,
Markham, Ontario
L3R 5B1
1-888-258-9361
www.marantz.com

For U.S.A.

marantz®

Limited Warranty

Marantz America, Inc. ("Marantz") warrants the following Marantz Products for the periods indicated:

1. The following Marantz Audio/Video components, have a 3 year warranty for both Parts & Labor, from the original purchase date:

Amplifiers, Pre Amplifiers, Pre Amplifier-Processor-Tuners, Integrated Amplifiers, Tuners, Receivers, Blu-ray DVD SA-CD/CD Players/Changers, Learning Remote Control Devices, iPod Docks & DLP front Projectors.

2. **DLP lamps** have a 90 day warranty for parts and labor from the original purchase date.

What is covered and what is not covered

Except as specified below, this warranty covers parts and labor to correct all defects in materials and workmanship. The following are not covered by the warranty:

1. Damage, deterioration, malfunction or failure to meet performance specifications resulting from:
 - a) Accident, acts of nature, misuse, abuse, neglect or unauthorized product modification.
 - b) Improper installation, removal or maintenance, or failure to follow instructions supplied with the product.
 - c) Repair or attempted repair by anyone not authorized by Marantz to repair the product.
 - d) Any shipment of the product (claims must be presented to the carrier).
 - e) Any cause other than a product defect.
2. Cleaning, initial set-up, check-ups with no defects found, or charges incurred for installation, removal or reinstallation of the product.
3. Any product on which the serial number has been defaced, modified or removed.
4. Batteries.
5. Accessories, including but not limited to, batteries, cables, mounting hardware and brackets, cleaning accessories, antenna and detachable power cords.
6. Warranty is void if purchase was made from anyone other than an authorized Marantz dealer.

Who may enforce the warranty

This warranty may be enforced only by the original purchaser.

What we will pay for

We will pay for all labor and material expenses for items covered by the warranty. Payment of shipping charges is discussed in the next section of this warranty.

How you can get service

1. If your unit needs service, contact Marantz customer service by calling **201-762-6666**. We will advise you of the name and location of one or more authorized Marantz service stations from which service can be obtained. Please do not return your unit to the factory without prior authorization.
2. You must pay any shipping charges if it is necessary to ship the product for service. However, if the necessary repairs are covered under warranty, we will pay the return shipping charges to any destination within the United States, its possessions or territories.
3. Whenever warranty service is required, you must present the original dated sales receipt or other proof of date of purchase.

Limitation of implied warranties

All implied warranties, including warranties of merchantability and fitness for a particular purchase, are limited in duration to the length of this warranty.

Exclusion of damages

Marantz liability for any defective product is limited to repair or replacement of the product at Marantz's option. Marantz shall not be liable for damage to other products caused by any defects in Marantz products, damages based upon inconvenience or loss of use of the product, or any other damages, whether incidental, consequential, or otherwise.

How state law relates to the warranty

Some states do not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Marantz America, Inc.

100 Corporate Drive,
Mahwah, NJ, 07430-2041
Phone. 201-762-6666